

## Need a product urgently?

**CALL US:** +65 6294 6388

**EMAIL:** [cmltc@singnet.com.sg](mailto:cmltc@singnet.com.sg)

**VISIT US:** 75 Rowell Road, Singapore 208011

**OPENING HOURS:** Monday-Friday, 9.00AM – 5.30PM

## Why choose Chan Man Lee?

- ✓ Ready stock of 25,000 products
- ✓ No MOQ required for majority of our products
- ✓ Product pickup ready in 10 minutes~1 working day
- ✓ Certified/authorised distributor for over 30 brands
- ✓ Only supplies products from well-known, esteemed brands
- ✓ Only genuine, authentic, factory-original products
- ✓ Technical knowledge on product codes (IMPA, sizing, etc.)

# DORMER PRAMET



















## SOLID MILLING

## 2024



 **DORMER**





## SOLID MILLING – GENERAL CONTENT

Navigator (by workpiece material)			P	M	K	N	S	H	
<b>SOLID MILLING</b> Tools for basic manufacturing, maintenance, repair, overhaul. Typically used with conventional machines. Suitable for low cutting parameters.		Slotting	C1 C3	C1 C3	C1 C3	C366			5
		Roughing	C9 C4	C908 C948	C9 C4	C9 C4	C908 C948		25
		Semi-finishing	C2	C2	C2	C333 C2	C2		35
		Finishing & Copy milling	C5 C907 C920	C5 C907 C920	C2 C907 C920	C159	C907 C920		45
		Form cutters	C8 C7	C8 C7	C8 C7	C8 C7	C8 C7		49
		Disc and Shell mills	D2 D7 D4	D2 D7 D4	D2 D7 D4	D2 D7 D4	D2 D76 D42		54
		Basic carbide line	S9		S9	S9			69
Solid carbide tools for mixed manufacturing. Suitable for moderate cutting parameters.		Slotting	S8	S71.	S8	S8	S71.		79
		Semi-finishing	S8	S71.	S8	S8	S71.		95
Solid carbide tools for process security and productivity. Typically used with CNC and automated manufacturing. Suitable for high cutting parameters.		Chamfering	S739 S740	S739 S740	S739 S740		S739 S740		105
		Roughing & HFC	S765	S765	S765	S6..	S765	S536 (HFC)	109
		Trochoidal milling	S77.	S77.	S77.		S77.	S52.	121
		Semi-finishing	S76.	S26.	S76.	S662 S612	S76.	S5	126
		Finishing	S768	S2	S768		S2	S5	145
		Copy milling	S791	S2 S791	S511	S629	S2	S5	153
		Thread milling	Thread forms: M, MF, UNC, UNF, G, NPT						
<b>ROTARY BURRS</b>		(by suitability)	P ST	M VA	PMKSH DC	N AL GRP	S AS	Sets P100 P101	180

INSTRUCTIONS				
How to read catalogue data? (ISO 13399, icons, navigation...)				250
Materials and coatings overview				256
HSS + HM endmills – Technical information				257
<b>HSS</b>	Feed rate charts, corrections	261	<b>HM</b> Feed rate charts, corrections	266
Thread mills – Hints		271	Feed rate charts	272
Burrs – Hints		275	Operating speeds	277
Workpiece material groups (WMG)				278



## SOLID ROUND TOOLS – CONTENT (ALPHABETICAL)

PRODUCT FAMILY		PRODUCT FAMILY		PRODUCT FAMILY		PRODUCT FAMILY	
<b>C</b>		<b>P</b>		<b>S</b>		<b>S804HA</b>	
C110	6	P100	246	S219	137	S804HB	96
C122	16	P101	247	S225	146	S812HA	97
C123	11	P501	234	S226	147	S812HB	82
C126	8	P505	235	S227	148	S813HA	83
C135	15	P507	236	S229	156	S813HB	88
C139	13	P509	237	S231	157	S814HA	89
C159	10	P511	238	S233	158	S814HB	98
C167	14	P513	239	S260	134	S822	99
C246	40	P515	240	S262	135	S823	85
C247	38	P521	241	S501	154	S902	91
C273	41	P523	242	S511	155	S903	70
C295	43	P601	214	S521	140	S904	72
C299	36	P605	215	S523	141	S922	71
C305	21	P607	216	S524	143	S933	73
C306	17	P609	217	S525	149	S944	75
C346	24	P611	218	S526	150	S991	76
C352	23	P613	219	S527	151		
C353	18	P615	220	S529	160		
C367	20	P621	221	S531	161		
C400	27	P701	204	S533	162		
C407	29	P703	205	S534	163		
C413	28	P705	206	S535	164		
C428	30	P707	207	S536	119		
C492	32	P709	208	S561	144		
C500	47	P711	209	S610	113		
C505	48	P713	210	S611	114		
C700	50	P715	211	S612	138		
C800	52	P721	212	S614	118		
C822	53	P801	182	S629	159		
C830	51	P801C	183	S637	112		
C907	37	P803	184	S638	115		
C908	31	P803C	185	S650	116		
C920	46	P805	186	S654	117		
C922	26	P805C	187	S662	139		
C948	33	P807	188	S710	84		
<b>D</b>		P807C	189	S713	90		
D400	65	P809	190	S714	92		
D402	67	P811	191	S715	93		
D420	66	P811C	192	S716	100		
D745	56	P813	193	S717	101		
D747	58	P813C	194	S718	102		
D750	60	P815	195	S722HB	132		
D751	61	P815C	196	S739	106		
D752	62	P817	197	S740	107		
D753	63	P819	198	S761	128		
D763	64	P821	199	S763	129		
<b>J</b>		P821C	200	S765	110		
J200	168	P823	201	S765HB	111		
J205	169	P825	202	S766	130		
J210	170	P831	224	S767	131		
J215	171	P833	225	S768	133		
J220	172	P835	226	S770HB	122		
J225	173	P837	227	S771HB	123		
J235	174	P841	228	S772HB	124		
J245	175	P842	229	S773HB	125		
J260	176	P843	230	S791	165		
J280	177	P844	231	S802HA	80		
<b>M</b>		P880	244	S802HB	81		
M902	248	P890	245	S803HA	86		
				S803HB	87		



**TOOLS FOR BASIC MANUFACTURING, MAINTENANCE, REPAIR, OVERHAUL.  
TYPICALLY USED WITH CONVENTIONAL MACHINES.**

---


Material code (BMC)	HSS-E PM	HSS-E PM	HSS-E	HSS-E PM	HSS-E PM	HSS-E	HSS-E	HSS-E	HSS-E PM	HSS-E PM	HSS-E PM	HSS-E PM	HSS-E	
Mill Profile	N	N	W	N	N	N	N	N	N	N	N	N	N	
Number of flutes (NOF)	NOF 2	NOF 2	NOF 2	NOF 2	NOF 2	NOF 2	NOF 2	NOF 2	NOF 3	NOF 3	NOF 3	NOF 3	NOF 3	
Cut length														
Flute Helix (FHA)	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 40°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 40°	$\lambda$ 30°	$\lambda$ 30°	
Flute Helix (FHA)	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 40°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 40°	$\lambda$ 30°	$\lambda$ 30°	
Radial rake angle (GAMF)	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 20°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 15°	$\gamma$ 12°	$\gamma$ 12°	
Shank	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835A	DIN 1835B	DIN 1835A	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835B	
Coating	Bright	TiCN	Bright	Bright	TiCN	Bright	Bright	Bright	Bright	Alcrona	Alcrona	Bright	Alcrona	
Cutting diameter tolerance class (TDC)	DC e8	DC e8	DC e8	DC e8	DC e8	DC js14	DC e8	DC e8	DC e8	DC e8	DC e8	DC e8	DC e8	
Direction														
Basic standard group (BSG)	DIN 327D	DIN 327D	DIN 844K	DIN 844K	DIN 844K	DORMER	DORMER	DORMER	DIN 327D	DIN 327D	DIN 327D	DIN 844K	DIN 844L	
Product Family Code	C110	C126	C159	C123	C139	C167	C135	C122	C306	C353	C367	C305	C352	C346
PSF cutting diameters range	1.00 – 40.00	1.00 – 25.00	2.00 – 20.00	1/16 – 30.00	2.00 – 22.00	6.00 – 16.00	2.00 – 20.00	5.00 – 22.00	3.00 – 30.00	3.00 – 30.00	2.00 – 20.00	2.00 – 32.00	3.00 – 20.00	3.00 – 20.00
	6	8	10	11	13	14	15	16	17	18	20	21	23	24
P	P1	■	■	■	■	■	■	■	■	■	■	■	■	■
	P2	■	■	■	■	■	■	■	■	■	■	■	■	■
	P3	■	■	■	■	■	■	■	■	■	■	■	■	■
	P4	■	■	■	■	■	■	■	■	■	■	■	■	■
M	M1	■	■	■	■	■	■	■	■	■	■	■	■	■
	M2	■	■	■	■	■	■	■	■	■	■	■	■	■
	M3	■	■	■	■	■	■	■	■	■	■	■	■	■
	M4	■	■	■	■	■	■	■	■	■	■	■	■	■
K	K1	■	■	■	■	■	■	■	■	■	■	■	■	■
	K2	■	■	■	■	■	■	■	■	■	■	■	■	■
	K3	■	■	■	■	■	■	■	■	■	■	■	■	■
	K4	■	■	■	■	■	■	■	■	■	■	■	■	■
	K5	■	■	■	■	■	■	■	■	■	■	■	■	■
N	N1	■	■	■	■	■	■	■	■	■	■	■	■	■
	N2	■	■	■	■	■	■	■	■	■	■	■	■	■
	N3	■	■	■	■	■	■	■	■	■	■	■	■	■
	N4	■	■	■	■	■	■	■	■	■	■	■	■	■
	N5	■	■	■	■	■	■	■	■	■	■	■	■	■
S	S1	■	■	■	■	■	■	■	■	■	■	■	■	■
	S2	■	■	■	■	■	■	■	■	■	■	■	■	■
	S3	■	■	■	■	■	■	■	■	■	■	■	■	■
	S4	■	■	■	■	■	■	■	■	■	■	■	■	■
H	H1													
	H2													
	H3													
	H4													

# C110



## 2-Flute HSS-E-PM Slot End Mill, Bright Finish

Extra short cut length, 2-flute design provides high rigidity. Suitable for milling shallow slots and ramping. The accurate diameter means the tools are designed for milling standard keyway slots to a P9 tolerance. Versatile and can be used in mild steels, non-ferrous materials and medium strength titanium alloys.

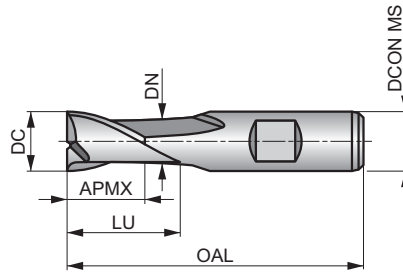

HSS-E PM	N	NOF 2
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835B	Bright	DC e8
	DIN 327D	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 53 E	<b>P1.2</b> ■ 59 E	<b>P1.3</b> ■ 61 E	<b>P2.1</b> ■ 45 E	<b>P2.2</b> ■ 40 E	<b>P3.1</b> ■ 37 E	<b>P3.2</b> ■ 30 D	<b>P4.1</b> ■ 22 D	<b>M1.1</b> ■ 41 E	<b>M1.2</b> ■ 35 E	<b>M2.1</b> ■ 37 E	<b>M2.2</b> ■ 30 D	<b>K1.1</b> ■ 35 E	<b>K1.2</b> ■ 26 E
<b>K1.3</b> ■ 19 E	<b>K2.1</b> ■ 62 E	<b>K2.2</b> ■ 50 E	<b>K2.3</b> ■ 40 D	<b>K3.1</b> ■ 54 E	<b>K3.2</b> ■ 42 E	<b>K3.3</b> ■ 34 D	<b>K4.1</b> ■ 50 D	<b>K4.2</b> ■ 38 D	<b>K4.3</b> ■ 28 D	<b>K4.4</b> ■ 24 C	<b>K4.5</b> ■ 20 C	<b>K5.1</b> ■ 57 D	<b>K5.2</b> ■ 43 D
<b>K5.3</b> ■ 33 D	<b>N1.1</b> ■ 95 G	<b>N1.2</b> ■ 71 F	<b>N1.3</b> ■ 48 F	<b>N2.1</b> ■ 48 E	<b>N2.2</b> ■ 43 E	<b>N2.3</b> ■ 31 E	<b>N3.1</b> ■ 50 E	<b>N3.2</b> ■ 29 E	<b>N3.3</b> ■ 15 E	<b>N4.1</b> ■ 50 E	<b>S1.1</b> ■ 35 D	<b>S1.2</b> ■ 25 D	<b>S2.1</b> ■ 20 C
<b>S3.1</b> ■ 15 C	<b>S4.1</b> ■ 12 C												

DCON MS tolerance h6.

Product	DC (inch)	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C1101.0	–	1.00	6.00	2.50	47.0	2	–	–
C1101.5	–	1.50	6.00	3.00	47.0	2	–	–
C1101/16	1/16	1.59	6.00	3.00	47.0	2	–	–
C1101.8	–	1.80	6.00	4.00	48.0	2	–	–
C1102.0	–	2.00	6.00	4.00	48.0	2	–	–
C1103/32	3/32	2.38	6.00	5.00	49.0	2	–	–
C1102.5	–	2.50	6.00	5.00	49.0	2	–	–
C1102.8	–	2.80	6.00	5.00	49.0	2	–	–
C1103.0	–	3.00	6.00	5.00	49.0	2	–	–
C1101/8	1/8	3.18	6.00	6.00	50.0	2	–	–
C1103.5	–	3.50	6.00	6.00	50.0	2	–	–
C1103.8	–	3.80	6.00	7.00	51.0	2	–	–
C1104.0	–	4.00	6.00	7.00	51.0	2	–	–
C1104.5	–	4.50	6.00	7.00	51.0	2	–	–
C1103/16	3/16	4.76	6.00	8.00	52.0	2	–	–
C1105.0	–	5.00	6.00	8.00	52.0	2	–	–
C1105.5	–	5.50	6.00	8.00	52.0	2	–	–
C1105.75 <sup>2)</sup>	–	5.75	6.00	8.00	52.0	2	–	–
C1106.0	–	6.00	6.00	8.00	52.0	2	–	–
C1101/4	1/4	6.35	10.00	10.00	60.0	2	–	–
C1106.5	–	6.50	10.00	10.00	60.0	2	–	–
C1107.0	–	7.00	10.00	10.00	60.0	2	–	–
C1107.5	–	7.50	10.00	10.00	60.0	2	–	–
C1107.75 <sup>2)</sup>	–	7.75	10.00	11.00	61.0	2	–	–
C1105/16	5/16	7.94	10.00	11.00	61.0	2	–	–

Product	DC	DC	DCON MS	APMX	OAL	NOF	LU	DN
	(inch)	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)
<b>C1108.0</b>	–	8.00	10.00	11.00	61.0	2	–	–
<b>C1108.5</b>	–	8.50	10.00	11.00	61.0	2	–	–
<b>C1109.0</b>	–	9.00	10.00	11.00	61.0	2	–	–
<b>C1109.5</b>	–	9.50	10.00	11.00	61.0	2	–	–
<b>C1103/8</b>	3/8	9.52	10.00	13.00	63.0	2	22.50	9.50
<b>C11010.0</b>	–	10.00	10.00	13.00	63.0	2	22.50	9.50
<b>C11013/32</b>	13/32	10.32	12.00	13.00	70.0	2	–	–
<b>C11010.5</b>	–	10.50	12.00	13.00	70.0	2	–	–
<b>C11011.0</b>	–	11.00	12.00	13.00	70.0	2	–	–
<b>C1107/16</b>	7/16	11.11	12.00	13.00	70.0	2	–	–
<b>C11011.5</b>	–	11.50	12.00	13.00	70.0	2	–	–
<b>C11012.0</b>	–	12.00	12.00	16.00	73.0	2	27.50	11.50
<b>C11012.5</b>	–	12.50	12.00	16.00	73.0	2	27.50	11.50
<b>C1101/2</b>	1/2	12.70	12.00	16.00	73.0	2	27.50	11.50
<b>C11013.0</b>	–	13.00	12.00	16.00	73.0	2	27.50	11.50
<b>C11017/32</b>	17/32	13.49	12.00	16.00	73.0	2	27.50	11.50
<b>C11014.0</b>	–	14.00	12.00	16.00	73.0	2	27.50	11.50
<b>C1109/16</b>	9/16	14.29	12.00	16.00	73.0	2	27.50	11.50
<b>C11015.0</b>	–	15.00	12.00	16.00	73.0	2	27.50	11.50
<b>C1105/8</b>	5/8	15.88	16.00	19.00	79.0	2	30.50	15.50
<b>C11016.0</b>	–	16.00	16.00	19.00	79.0	2	30.50	15.50
<b>C11017.0</b>	–	17.00	16.00	19.00	79.0	2	30.50	15.50
<b>C11011/16</b>	11/16	17.46	16.00	19.00	79.0	2	30.50	15.50
<b>C11018.0</b>	–	18.00	16.00	19.00	79.0	2	30.50	15.50
<b>C11019.0</b>	–	19.00	16.00	19.00	79.0	2	30.50	15.50
<b>C1103/4</b>	3/4	19.05	20.00	22.00	88.0	2	37.50	18.50
<b>C11020.0</b>	–	20.00	20.00	22.00	88.0	2	37.50	19.50
<b>C11022.0</b>	–	22.00	20.00	22.00	88.0	2	37.50	19.50
<b>C1107/8</b>	7/8	22.22	20.00	22.00	88.0	2	37.50	19.50
<b>C11024.0</b>	–	24.00	25.00	26.00	102.0	2	45.50	23.50
<b>C11025.0</b>	–	25.00	25.00	26.00	102.0	2	45.50	24.50
<b>C1101</b>	1"	25.40	25.00	26.00	102.0	2	45.50	24.50
<b>C11026.0</b>	–	26.00	25.00	26.00	102.0	2	45.50	24.50
<b>C11028.0</b>	–	28.00	25.00	26.00	102.0	2	45.50	24.50
<b>C11030.0</b>	–	30.00	25.00	26.00	102.0	2	45.50	24.50
<b>C11032.0</b>	–	32.00	32.00	32.00	112.0	2	51.50	31.50
<b>C11035.0<sup>1)</sup></b>	–	35.00	32.00	32.00	112.0	2	51.50	31.50
<b>C11036.0<sup>1)</sup></b>	–	36.00	32.00	32.00	112.0	2	51.50	31.50
<b>C11040.0<sup>1)</sup></b>	–	40.00	40.00	38.00	130.0	2	59.50	39.00

<sup>1)</sup> DC tolerance h10; available in HSS-E only.


<sup>2)</sup> DC tolerance h10; slot not in P9 tolerance.

# C126




## 2-Flute HSS-E-PM Slot End Mill, TiCN Coating

Extra short cut length, 2-flute design provides high rigidity. Suitable for milling shallow slots and ramping. The accurate diameter means the tools are designed for milling standard keyway slots to a P9 tolerance. TiCN coating increases the tool life and improves performance when milling hard and abrasive materials.

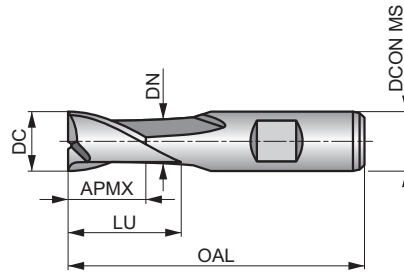

HSS-E PM	N	NOF 2
	$\lambda$ 30°	$\gamma$ 12°
	TiCN	DC e8
	DIN 327D	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 126 E	<b>P1.2</b> ■ 141 E	<b>P1.3</b> ■ 146 E	<b>P2.1</b> ■ 108 E	<b>P2.2</b> ■ 95 E	<b>P2.3</b> ▧ 84 D	<b>P3.1</b> ■ 81 E	<b>P3.2</b> ■ 65 D	<b>P3.3</b> ▧ 55 D	<b>P4.1</b> ■ 48 D	<b>P4.2</b> ▧ 41 D	<b>P4.3</b> ▧ 34 D	<b>M1.1</b> ▧ 62 E	<b>M1.2</b> ▧ 52 E
<b>M2.1</b> ▧ 55 E	<b>M2.2</b> ▧ 45 D	<b>M3.3</b> ▧ 26 C	<b>M4.1</b> ▧ 25 C	<b>K1.1</b> ■ 60 E	<b>K1.2</b> ■ 44 E	<b>K1.3</b> ■ 33 E	<b>K2.1</b> ■ 111 E	<b>K2.2</b> ■ 90 E	<b>K2.3</b> ■ 72 D	<b>K3.1</b> ■ 98 E	<b>K3.2</b> ■ 75 E	<b>K3.3</b> ■ 61 D	<b>K4.1</b> ■ 91 D
<b>K4.2</b> ■ 68 D	<b>K4.3</b> ■ 50 D	<b>K4.4</b> ■ 43 C	<b>K4.5</b> ■ 36 C	<b>K5.1</b> ■ 103 D	<b>K5.2</b> ■ 77 D	<b>K5.3</b> ■ 60 D	<b>N1.1</b> ▧ 177 G	<b>N1.2</b> ▧ 133 F	<b>N1.3</b> ▧ 89 F	<b>N2.1</b> ▧ 89 E	<b>N2.2</b> ■ 80 E	<b>N2.3</b> ■ 57 E	<b>N3.1</b> ■ 93 E
<b>N3.2</b> ■ 55 E	<b>N3.3</b> ■ 28 E	<b>N4.1</b> ▧ 93 E	<b>S1.1</b> ■ 45 D	<b>S1.2</b> ■ 40 D	<b>S1.3</b> ▧ 15 C	<b>S2.1</b> ■ 33 C	<b>S2.2</b> ▧ 14 C	<b>S3.1</b> ■ 25 C	<b>S3.2</b> ▧ 10 C	<b>S4.1</b> ■ 20 C	<b>S4.2</b> ▧ 8 C		

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C1261.0	1.00	6.00	2.50	47.0	2	–	–
C1261.5	1.50	6.00	3.00	47.0	2	–	–
C1262.0	2.00	6.00	4.00	48.0	2	–	–
C1262.5	2.50	6.00	5.00	49.0	2	–	–
C1263.0	3.00	6.00	5.00	49.0	2	–	–
C1263.5	3.50	6.00	6.00	50.0	2	–	–
C1264.0	4.00	6.00	7.00	51.0	2	–	–
C1264.5	4.50	6.00	7.00	51.0	2	–	–
C1265.0	5.00	6.00	8.00	52.0	2	–	–
C1265.5	5.50	6.00	8.00	52.0	2	–	–
C1266.0	6.00	6.00	8.00	52.0	2	–	–
C1266.5	6.50	10.00	10.00	60.0	2	–	–
C1267.0	7.00	10.00	10.00	60.0	2	–	–
C1267.5	7.50	10.00	10.00	60.0	2	–	–
C1268.0	8.00	10.00	11.00	61.0	2	–	–
C1268.5	8.50	10.00	11.00	61.0	2	–	–
C1269.0	9.00	10.00	11.00	61.0	2	–	–
C12610.0	10.00	10.00	13.00	63.0	2	22.50	9.50
C12610.5	10.50	12.00	13.00	70.0	2	–	–
C12611.0	11.00	12.00	13.00	70.0	2	–	–
C12611.5	11.50	12.00	13.00	70.0	2	–	–
C12612.0	12.00	12.00	16.00	73.0	2	27.50	11.50
C12612.5	12.50	12.00	16.00	73.0	2	27.50	11.50
C12613.0	13.00	12.00	16.00	73.0	2	27.50	11.50
C12614.0	14.00	12.00	16.00	73.0	2	27.50	11.50




Product	DC	DCON MS	APMX	OAL	NOF	LU	DN
	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)
<b>C12615.0</b>	15.00	12.00	16.00	73.0	2	27.50	11.50
<b>C12616.0</b>	16.00	16.00	19.00	79.0	2	30.50	15.50
<b>C12618.0</b>	18.00	16.00	19.00	79.0	2	30.50	15.50
<b>C12620.0</b>	20.00	20.00	22.00	88.0	2	37.50	19.50
<b>C12622.0</b>	22.00	20.00	22.00	88.0	2	37.50	19.50
<b>C12624.0</b>	24.00	25.00	26.00	102.0	2	45.50	23.50
<b>C12625.0</b>	25.00	25.00	26.00	102.0	2	45.50	24.50

# C159



## 2-Flute HSS-E Slot End Mill, Bright Finish

Short cut length, 2-flute design with 40° helix for milling slots, profile milling and ramping in softer materials, whilst the accurate diameter means standard keyway slots to P9 tolerance can be milled. Designed specifically for milling in non-ferrous materials.

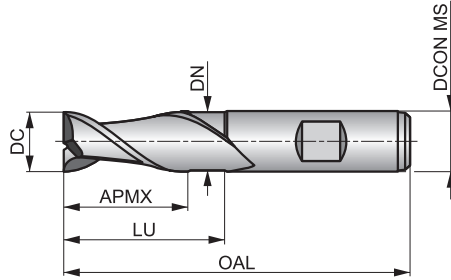

HSS-E	W	NOF 2
	λ 40°	γ 20°
DIN 1835B	Bright	DC e8
	DIN 844K	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 46 D	<b>P1.2</b> ■ 52 D	<b>P1.3</b> ■ 54 D	<b>P2.1</b> ■ 40 D	<b>P2.2</b> ■ 35 D	<b>M1.1</b> ■ 32 D	<b>M1.2</b> ■ 27 D	<b>M2.1</b> ■ 28 D	<b>M2.2</b> ■ 23 C	<b>M3.1</b> ■ 22 C	<b>M3.2</b> ■ 19 C	<b>N1.1</b> ■ 142 F	<b>N1.2</b> ■ 107 E	<b>N1.3</b> ■ 72 E
<b>N2.1</b> ■ 72 D	<b>N2.2</b> ■ 64 D	<b>N2.3</b> ■ 46 D	<b>N3.1</b> ■ 75 D	<b>N3.2</b> ■ 44 D	<b>N3.3</b> ■ 22 D	<b>N4.1</b> ■ 75 D	<b>N4.2</b> ■ 29 D	<b>S1.1</b> ■ 28 C					

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C1592.0	2.00	6.00	7.00	51.0	2	–	–
C1593.0	3.00	6.00	8.00	52.0	2	–	–
C1594.0	4.00	6.00	11.00	55.0	2	–	–
C1595.0	5.00	6.00	13.00	57.0	2	–	–
C1596.0	6.00	6.00	13.00	57.0	2	–	–
C1598.0	8.00	10.00	19.00	69.0	2	–	–
C15910.0	10.00	10.00	22.00	72.0	2	–	–
C15912.0	12.00	12.00	26.00	83.0	2	–	–
C15914.0	14.00	12.00	26.00	83.0	2	37.50	11.50
C15916.0	16.00	16.00	32.00	92.0	2	43.50	15.50
C15918.0	18.00	16.00	32.00	92.0	2	43.50	15.50
C15920.0	20.00	20.00	38.00	104.0	2	53.50	19.50

# C123



## 2-Flute HSS-E-PM Slot End Mill, Bright Finish

Short cut length, 2-flute design provides high rigidity. Suitable for milling shallow slots and ramping. The accurate diameter means the tools are designed for milling standard keyway slots to a P9 tolerance. Versatile and can be used in mild steels, non-ferrous materials and medium strength titanium alloys.

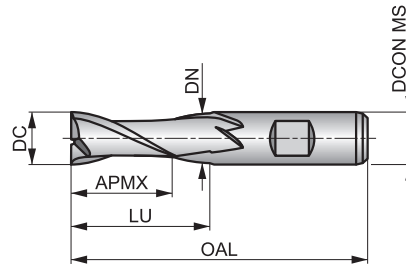

HSS-E PM	N	NOF 2
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835B	Bright	DC e8
	DIN 844K	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 53 D	<b>P1.2</b> ■ 59 D	<b>P1.3</b> ■ 61 D	<b>P2.1</b> ■ 45 D	<b>P2.2</b> ■ 40 D	<b>P3.1</b> ■ 37 D	<b>P3.2</b> ■ 30 C	<b>P4.1</b> ■ 22 C	<b>M1.1</b> ▣ 34 D	<b>M1.2</b> ▣ 29 D	<b>M2.1</b> ▣ 31 D	<b>M2.2</b> ▣ 25 C	<b>K1.1</b> ▣ 30 D	<b>K1.2</b> ▣ 22 D
<b>K1.3</b> ▣ 17 D	<b>K2.1</b> ▣ 55 D	<b>K2.2</b> ▣ 45 D	<b>K2.3</b> ▣ 36 C	<b>K3.1</b> ▣ 49 D	<b>K3.2</b> ▣ 37 D	<b>K3.3</b> ▣ 30 B	<b>K4.1</b> ▣ 45 C	<b>K4.2</b> ▣ 34 C	<b>K4.3</b> ▣ 25 C	<b>K4.4</b> ▣ 22 B	<b>K4.5</b> ▣ 18 B	<b>K5.1</b> ▣ 51 C	<b>K5.2</b> ▣ 39 C
<b>K5.3</b> ▣ 30 C	<b>N1.1</b> ▣ 95 F	<b>N1.2</b> ▣ 71 E	<b>N1.3</b> ▣ 48 E	<b>N2.1</b> ▣ 48 D	<b>N2.2</b> ▣ 43 D	<b>N2.3</b> ▣ 31 D	<b>N3.1</b> ■ 50 D	<b>N3.2</b> ■ 29 D	<b>N3.3</b> ■ 15 D	<b>N4.1</b> ▣ 50 D	<b>S1.1</b> ■ 30 C	<b>S1.2</b> ▣ 25 C	<b>S2.1</b> ▣ 20 B
<b>S3.1</b> ▣ 15 B	<b>S4.1</b> ▣ 12 B												

DCON MS tolerance h6.

Product	DC (inch)	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C1231/16 <sup>1)</sup>	1/16	1.59	6.00	7.00	51.0	2	–	–
C1232.0	–	2.00	6.00	7.00	51.0	2	–	–
C1232.5	–	2.50	6.00	8.00	52.0	2	–	–
C1233.0	–	3.00	6.00	8.00	52.0	2	–	–
C1231/8 <sup>1)</sup>	1/8	3.18	6.00	10.00	54.0	2	–	–
C1233.5	–	3.50	6.00	10.00	54.0	2	–	–
C1235/32 <sup>1)</sup>	5/32	3.97	6.00	11.00	55.0	2	–	–
C1234.0	–	4.00	6.00	11.00	55.0	2	–	–
C1234.5	–	4.50	6.00	11.00	55.0	2	–	–
C1233/16 <sup>1)</sup>	3/16	4.76	6.00	13.00	57.0	2	–	–
C1235.0	–	5.00	6.00	13.00	57.0	2	–	–
C1235.5	–	5.50	6.00	13.00	57.0	2	–	–
C1236.0	–	6.00	6.00	13.00	57.0	2	–	–
C1231/4 <sup>1)</sup>	1/4	6.35	10.00	16.00	66.0	2	–	–
C1236.5	–	6.50	10.00	16.00	66.0	2	–	–
C1237.0	–	7.00	10.00	16.00	66.0	2	–	–
C1237.5	–	7.50	10.00	16.00	66.0	2	–	–
C1235/16 <sup>1)</sup>	5/16	7.94	10.00	19.00	69.0	2	–	–
C1238.0	–	8.00	10.00	19.00	69.0	2	–	–
C1238.5	–	8.50	10.00	19.00	69.0	2	–	–
C1239.0	–	9.00	10.00	19.00	69.0	2	–	–
C1239.5	–	9.50	10.00	19.00	69.0	2	–	–
C1233/8 <sup>1)</sup>	3/8	9.52	10.00	22.00	72.0	2	31.50	9.50
C12310.0	–	10.00	10.00	22.00	72.0	2	31.50	9.50
C12311.0	–	11.00	12.00	22.00	79.0	2	–	–

Product	DC	DC	D CON MS	APMX	OAL	NOF	LU	DN
	(inch)	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)
<b>C12312.0</b>	–	12.00	12.00	26.00	83.0	2	37.50	11.50
<b>C12312.0<sup>1)</sup></b>	1/2	12.70	12.00	26.00	83.0	2	37.50	11.50
<b>C12313.0</b>	–	13.00	12.00	26.00	83.0	2	37.50	11.50
<b>C12314.0</b>	–	14.00	12.00	26.00	83.0	2	37.50	11.50
<b>C12315.0</b>	–	15.00	12.00	26.00	83.0	2	37.50	11.50
<b>C12316.0</b>	–	16.00	16.00	32.00	92.0	2	43.50	15.50
<b>C12318.0</b>	–	18.00	16.00	32.00	92.0	2	43.50	15.50
<b>C12320.0</b>	–	20.00	20.00	38.00	104.0	2	53.50	19.50
<b>C12322.0</b>	–	22.00	20.00	38.00	104.0	2	53.50	19.50
<b>C12325.0</b>	–	25.00	25.00	45.00	121.0	2	64.50	24.50
<b>C12330.0</b>	–	30.00	25.00	45.00	121.0	2	64.50	24.50


<sup>1)</sup> DC tolerance -0.0005 inches / -0.0013 inches.

# C139



## 2-Flute HSS-E-PM Slot End Mill, TiCN Coating

Short cut length, 2-flute design provides high rigidity. Suitable for milling shallow slots and ramping. The accurate diameter means the tools are designed for milling standard keyway slots to a P9 tolerance. TiCN coating increases the life of the cutter and improves performance when milling hard and abrasive materials.

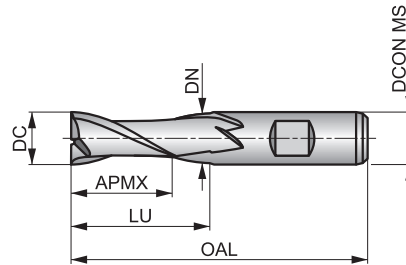

HSS-E PM	N	NOF 2
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835B	TiCN	DC e8
	DIN 844K	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 113 D	<b>P1.2</b> ■ 126 D	<b>P1.3</b> ■ 131 D	<b>P2.1</b> ■ 97 D	<b>P2.2</b> ■ 85 D	<b>P2.3</b> ▣ 75 C	<b>P3.1</b> ■ 74 D	<b>P3.2</b> ■ 59 C	<b>P3.3</b> ▣ 50 C	<b>P4.1</b> ■ 44 C	<b>P4.2</b> ▣ 37 C	<b>P4.3</b> ▣ 31 C	<b>M1.1</b> ▣ 62 D	<b>M1.2</b> ▣ 52 D
<b>M2.1</b> ▣ 55 D	<b>M2.2</b> ▣ 45 C	<b>M3.3</b> ▣ 26 B	<b>M4.1</b> ▣ 25 B	<b>K1.1</b> ■ 55 D	<b>K1.2</b> ■ 41 D	<b>K1.3</b> ■ 31 D	<b>K2.1</b> ■ 98 D	<b>K2.2</b> ■ 80 D	<b>K2.3</b> ■ 64 C	<b>K3.1</b> ■ 87 D	<b>K3.2</b> ■ 67 D	<b>K3.3</b> ■ 54 B	<b>K4.1</b> ■ 81 C
<b>K4.2</b> ■ 61 C	<b>K4.3</b> ■ 45 C	<b>K4.4</b> ■ 38 B	<b>K4.5</b> ■ 32 B	<b>K5.1</b> ■ 91 C	<b>K5.2</b> ■ 69 C	<b>K5.3</b> ■ 53 C	<b>N1.1</b> ▣ 159 F	<b>N1.2</b> ▣ 120 E	<b>N1.3</b> ▣ 80 E	<b>N2.1</b> ▣ 80 D	<b>N2.2</b> ▣ 72 D	<b>N2.3</b> ■ 51 D	<b>N3.1</b> ■ 84 D
<b>N3.2</b> ■ 50 D	<b>N3.3</b> ■ 25 D	<b>N4.1</b> ▣ 84 D	<b>S1.1</b> ■ 45 C	<b>S1.2</b> ■ 35 C	<b>S1.3</b> ▣ 15 B	<b>S2.1</b> ■ 33 B	<b>S2.2</b> ▣ 14 B	<b>S3.1</b> ■ 25 B	<b>S3.2</b> ▣ 10 B	<b>S4.1</b> ■ 20 B	<b>S4.2</b> ▣ 8 B		

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C1392.0	2.00	6.00	7.00	51.0	2	–	–
C1393.0	3.00	6.00	8.00	52.0	2	–	–
C1394.0	4.00	6.00	11.00	55.0	2	–	–
C1395.0	5.00	6.00	13.00	57.0	2	–	–
C1395.5	5.50	6.00	13.00	57.0	2	–	–
C1396.0	6.00	6.00	13.00	57.0	2	–	–
C1396.5	6.50	10.00	16.00	66.0	2	–	–
C1397.0	7.00	10.00	16.00	66.0	2	–	–
C1397.5	7.50	10.00	16.00	66.0	2	–	–
C1398.0	8.00	10.00	19.00	69.0	2	–	–
C1398.5	8.50	10.00	19.00	69.0	2	–	–
C1399.0	9.00	10.00	19.00	69.0	2	–	–
C13910.0	10.00	10.00	22.00	72.0	2	31.50	9.50
C13911.0	11.00	12.00	22.00	79.0	2	–	–
C13912.0	12.00	12.00	26.00	83.0	2	37.50	11.50
C13913.0	13.00	12.00	26.00	83.0	2	37.50	11.50
C13914.0	14.00	12.00	26.00	83.0	2	37.50	11.50
C13915.0	15.00	12.00	26.00	83.0	2	37.50	11.50
C13916.0	16.00	16.00	32.00	92.0	2	43.50	15.50
C13918.0	18.00	16.00	32.00	92.0	2	43.50	15.50
C13920.0	20.00	20.00	38.00	104.0	2	53.50	19.50
C13922.0	22.00	20.00	38.00	104.0	2	53.50	19.50

# C167



## 2-flute HSS-E Extra Long Reach End Mill, Bright Finish

Short cut length, 2-flute design without neck recess and with extra long reach for machining extra deep pockets in difficult to reach areas. Suitable for milling in mild steels and non-ferrous materials.

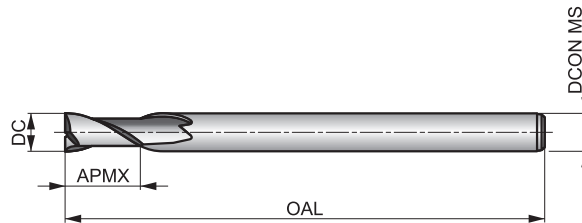

HSS-E	N	NOF 2
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835A	Bright	DC js14



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 46 C	<b>P1.2</b> ■ 52 C	<b>P1.3</b> ■ 54 C	<b>P2.1</b> ■ 40 C	<b>P2.2</b> ■ 35 C	<b>P3.1</b> ■ 32 C	<b>P3.2</b> ■ 26 B	<b>P4.1</b> ■ 19 B	<b>M1.1</b> ■ 34 C	<b>M1.2</b> ■ 29 C	<b>M2.1</b> ■ 31 C	<b>M2.2</b> ■ 25 B	<b>K1.1</b> ■ 30 C	<b>K1.2</b> ■ 22 C
<b>K1.3</b> ■ 17 C	<b>K2.1</b> ■ 49 C	<b>K2.2</b> ■ 40 C	<b>K2.3</b> ■ 32 B	<b>K3.1</b> ■ 44 C	<b>K3.2</b> ■ 33 C	<b>K3.3</b> ■ 27 A	<b>K4.1</b> ■ 40 B	<b>K4.2</b> ■ 30 B	<b>K4.3</b> ■ 22 B	<b>K4.4</b> ■ 19 A	<b>K4.5</b> ■ 16 A	<b>K5.1</b> ■ 46 B	<b>K5.2</b> ■ 34 B
<b>K5.3</b> ■ 27 B	<b>N1.1</b> ■ 81 E	<b>N1.2</b> ■ 60 D	<b>N1.3</b> ■ 41 D	<b>N2.1</b> ■ 41 C	<b>N2.2</b> ■ 37 C	<b>N2.3</b> ■ 26 C	<b>N3.1</b> ■ 43 C	<b>N3.2</b> ■ 25 C	<b>N3.3</b> ■ 13 C	<b>N4.1</b> ■ 43 C	<b>S1.1</b> ■ 30 B	<b>S1.2</b> ■ 25 B	<b>S2.1</b> ■ 20 A
<b>S3.1</b> ■ 15 A	<b>S4.1</b> ■ 12 A												

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
<b>C1676.0</b>	6.00	6.00	13.00	180.0	2
<b>C1678.0</b>	8.00	8.00	19.00	180.0	2
<b>C16710.0</b>	10.00	10.00	22.00	200.0	2
<b>C16712.0</b>	12.00	12.00	26.00	200.0	2
<b>C16716.0</b>	16.00	16.00	32.00	200.0	2

# C135



## 2-Flute HSS-E Extra Long Reach Slot End Mill, Bright Finish

Short cut length, 2-flute design provides high rigidity for milling standard keyway slots to a P9 tolerance. Provides increased strength and reduced vibrations in difficult to reach areas. This can be used in mild steels and non-ferrous materials.

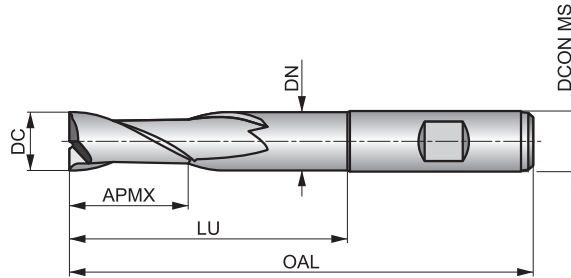

HSS-E	N	NOF 2
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835B	Bright	DC e8



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 46 C	<b>P1.2</b> ■ 52 C	<b>P1.3</b> ■ 54 C	<b>P2.1</b> ■ 40 C	<b>P2.2</b> ■ 35 C	<b>P3.1</b> ■ 32 C	<b>P3.2</b> ■ 26 B	<b>P4.1</b> ■ 19 B	<b>M1.1</b> ■ 34 C	<b>M1.2</b> ■ 29 C	<b>M2.1</b> ■ 31 C	<b>M2.2</b> ■ 25 B	<b>K1.1</b> ■ 30 C	<b>K1.2</b> ■ 22 C
<b>K1.3</b> ■ 17 C	<b>K2.1</b> ■ 49 C	<b>K2.2</b> ■ 40 C	<b>K2.3</b> ■ 32 B	<b>K3.1</b> ■ 44 C	<b>K3.2</b> ■ 33 C	<b>K3.3</b> ■ 27 A	<b>K4.1</b> ■ 40 B	<b>K4.2</b> ■ 30 B	<b>K4.3</b> ■ 22 B	<b>K4.4</b> ■ 19 A	<b>K4.5</b> ■ 16 A	<b>K5.1</b> ■ 46 B	<b>K5.2</b> ■ 34 B
<b>K5.3</b> ■ 27 B	<b>N1.1</b> ■ 81 E	<b>N1.2</b> ■ 60 D	<b>N1.3</b> ■ 41 D	<b>N2.1</b> ■ 41 C	<b>N2.2</b> ■ 37 C	<b>N2.3</b> ■ 26 C	<b>N3.1</b> ■ 43 C	<b>N3.2</b> ■ 25 C	<b>N3.3</b> ■ 13 C	<b>N4.1</b> ■ 43 C	<b>S1.1</b> ■ 30 B	<b>S1.2</b> ■ 25 B	<b>S2.1</b> ■ 20 A
<b>S3.1</b> ■ 15 A	<b>S4.1</b> ■ 12 A												

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C1352.0	2.00	6.00	7.00	54.0	2	18.00	1.80
C1353.0	3.00	6.00	8.00	56.0	2	20.00	2.80
C1354.0	4.00	6.00	11.00	63.0	2	27.00	3.70
C1355.0	5.00	6.00	13.00	68.0	2	32.00	4.70
C1356.0	6.00	6.00	13.00	68.0	2	32.00	5.70
C1358.0	8.00	10.00	19.00	88.0	2	48.00	7.50
C13510.0	10.00	10.00	22.00	95.0	2	54.50	9.50
C13512.0	12.00	12.00	26.00	110.0	2	64.50	11.50
C13514.0	14.00	12.00	26.00	110.0	2	64.50	11.50
C13516.0	16.00	16.00	32.00	123.0	2	74.50	15.50
C13518.0	18.00	16.00	32.00	123.0	2	74.50	15.50
C13520.0	20.00	20.00	38.00	141.0	2	90.50	19.50


# C122



## 2-flute HSS-E Extra Long Series End Mill, Bright Finish

Long cut length, 2-flute design provides high rigidity for milling standard slots. Designed for machining deep slots in difficult to reach areas in mild steels and non-ferrous materials.

HSS-E	N	NOF 2
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835A	Bright	DC e8
	DORMER	

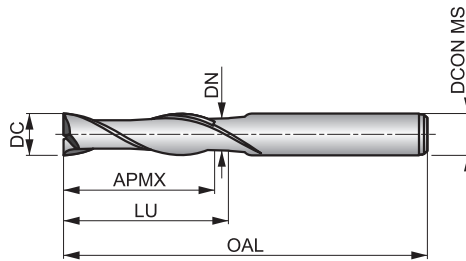

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 41 C	<b>P1.2</b> ■ 46 C	<b>P1.3</b> ■ 48 C	<b>P2.1</b> ■ 35 C	<b>P2.2</b> ■ 31 C	<b>P3.1</b> ■ 28 C	<b>P3.2</b> ■ 23 B	<b>P4.1</b> ■ 17 B	<b>M1.1</b> ■ 27 C	<b>M1.2</b> ■ 23 C	<b>M2.1</b> ■ 24 C	<b>M2.2</b> ■ 20 B	<b>K1.1</b> ■ 25 C	<b>K1.2</b> ■ 19 C
<b>K1.3</b> ■ 14 C	<b>K2.1</b> ■ 44 C	<b>K2.2</b> ■ 36 C	<b>K2.3</b> ■ 29 B	<b>K3.1</b> ■ 39 C	<b>K3.2</b> ■ 30 C	<b>K3.3</b> ■ 24 A	<b>K4.1</b> ■ 36 B	<b>K4.2</b> ■ 27 B	<b>K4.3</b> ■ 20 B	<b>K4.4</b> ■ 17 A	<b>K4.5</b> ■ 14 A	<b>K5.1</b> ■ 41 B	<b>K5.2</b> ■ 31 B
<b>K5.3</b> ■ 24 B	<b>N1.1</b> ■ 76 E	<b>N1.2</b> ■ 57 D	<b>N1.3</b> ■ 38 D	<b>N2.1</b> ■ 38 C	<b>N2.2</b> ■ 34 C	<b>N2.3</b> ■ 25 C	<b>N3.1</b> ■ 40 C	<b>N3.2</b> ■ 23 C	<b>N3.3</b> ■ 12 C	<b>N4.1</b> ■ 40 C	<b>S1.1</b> ■ 25 B	<b>S1.2</b> ■ 20 B	<b>S2.1</b> ■ 15 A
<b>S3.1</b> ■ 11 A	<b>S4.1</b> ■ 9 A												

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C1225.0	5.00	5.00	22.00	65.0	2	–	–
C1226.0	6.00	6.00	27.00	75.0	2	–	–
C1227.0	7.00	8.00	33.00	85.0	2	–	–
C1228.0	8.00	8.00	33.00	85.0	2	–	–
C12210.0	10.00	10.00	40.00	95.0	2	–	–
C12212.0	12.00	12.00	45.00	110.0	2	–	–
C12214.0	14.00	12.00	52.00	125.0	2	–	–
C12216.0	16.00	16.00	58.00	140.0	2	69.50	15.50
C12218.0	18.00	16.00	65.00	150.0	2	76.50	15.50
C12220.0	20.00	20.00	70.00	160.0	2	85.50	19.50
C12222.0	22.00	20.00	75.00	170.0	2	90.50	19.50

# C306



## 3-Flute HSS-E-PM Slot End Mill, Bright Finish

Extra short cut length, 3-flute design provides high rigidity and is suitable for milling shallow slots and ramping. The accurate diameter means the tools are designed for milling standard keyway slots to a P9 tolerance. Versatile and can be used in mild steels and non-ferrous materials.

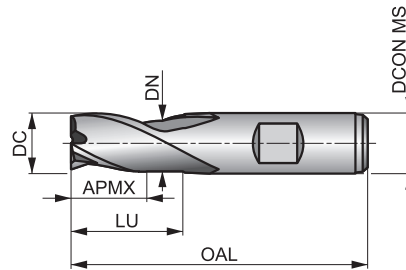

HSS-E PM	N	NOF 3
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835B	Bright	DC e8
	DIN 327D	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 54 E	<b>P1.2</b> ■ 61 E	<b>P1.3</b> ■ 63 E	<b>P2.1</b> ■ 47 E	<b>P2.2</b> ■ 41 E	<b>P3.1</b> ▣ 38 E	<b>P3.2</b> ▣ 31 D	<b>P4.1</b> ▣ 23 D	<b>M1.1</b> ▣ 36 E	<b>M1.2</b> ▣ 30 E	<b>M2.1</b> ▣ 32 E	<b>M2.2</b> ▣ 26 D	<b>K1.1</b> ▣ 32 E	<b>K1.2</b> ▣ 24 E
<b>K1.3</b> ▣ 18 E	<b>K2.1</b> ▣ 59 E	<b>K2.2</b> ▣ 48 E	<b>K2.3</b> ▣ 38 D	<b>K3.1</b> ▣ 52 E	<b>K3.2</b> ▣ 40 E	<b>K3.3</b> ▣ 32 D	<b>K4.1</b> ▣ 48 D	<b>K4.2</b> ▣ 37 D	<b>K4.3</b> ▣ 27 D	<b>K4.4</b> ▣ 23 C	<b>K4.5</b> ▣ 19 C	<b>K5.1</b> ▣ 55 D	<b>K5.2</b> ▣ 41 D
<b>K5.3</b> ▣ 32 D	<b>N1.3</b> ▣ 50 F	<b>N2.1</b> ▣ 50 E	<b>N2.2</b> ▣ 45 E	<b>N2.3</b> ▣ 32 E	<b>N3.1</b> ■ 52 E	<b>N3.2</b> ■ 30 E	<b>N3.3</b> ■ 16 E	<b>N4.1</b> ▣ 52 E	<b>S1.1</b> ■ 33 D	<b>S1.2</b> ▣ 26 D	<b>S2.1</b> ▣ 20 C	<b>S3.1</b> ▣ 15 C	<b>S4.1</b> ▣ 12 C

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C3063.0	3.00	6.00	5.00	49.0	3	–	–
C3064.0	4.00	6.00	7.00	51.0	3	–	–
C3065.0	5.00	6.00	8.00	52.0	3	–	–
C3066.0	6.00	6.00	8.00	52.0	3	–	–
C3067.0	7.00	10.00	10.00	60.0	3	–	–
C3068.0	8.00	10.00	11.00	61.0	3	–	–
C3069.0	9.00	10.00	11.00	61.0	3	–	–
C30610.0	10.00	10.00	13.00	63.0	3	22.50	9.50
C30611.0	11.00	12.00	13.00	70.0	3	–	–
C30612.0	12.00	12.00	16.00	73.0	3	27.50	11.50
C30614.0	14.00	12.00	16.00	73.0	3	27.50	11.50
C30615.0	15.00	12.00	16.00	73.0	3	27.50	11.50
C30616.0	16.00	16.00	19.00	79.0	3	30.50	15.50
C30618.0	18.00	16.00	19.00	79.0	3	30.50	15.50
C30620.0	20.00	20.00	22.00	88.0	3	37.50	19.50
C30622.0	22.00	20.00	22.00	88.0	3	37.50	19.50
C30625.0	25.00	25.00	26.00	102.0	3	45.50	24.50
C30630.0	30.00	25.00	26.00	102.0	3	45.50	24.50

# C353



## 3-Flute HSS-E-PM Slot End Mill, Alcrona Coating

Extra short cut length, 3-flute design provides high rigidity and is suitable for milling shallow slots and ramping. The accurate diameter means the tools are designed for milling standard keyway slots to a P9 tolerance. Alcrona coating improves performance and extends the tool life.

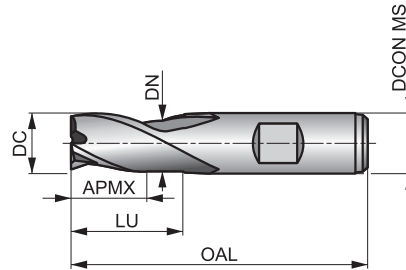

HSS-E PM	N	NOF 3
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835B	Alcrona	DC e8
	DIN 327D	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 133 E	<b>P1.2</b> ■ 148 E	<b>P1.3</b> ■ 154 E	<b>P2.1</b> ■ 114 E	<b>P2.2</b> ■ 100 E	<b>P2.3</b> ■ 88 D	<b>P3.1</b> ■ 88 E	<b>P3.2</b> ■ 71 D	<b>P3.3</b> ■ 60 D	<b>P4.1</b> ■ 53 D	<b>P4.2</b> ■ 45 D	<b>P4.3</b> ▣ 37 D	<b>M1.1</b> ▣ 69 E	<b>M1.2</b> ▣ 58 E
<b>M2.1</b> ▣ 61 E	<b>M2.2</b> ▣ 50 D	<b>M3.1</b> ▣ 52 D	<b>M3.2</b> ▣ 45 D	<b>M3.3</b> ▣ 41 C	<b>M4.1</b> ▣ 30 C	<b>K1.1</b> ■ 65 E	<b>K1.2</b> ■ 48 E	<b>K1.3</b> ■ 36 E	<b>K2.1</b> ■ 117 E	<b>K2.2</b> ■ 95 E	<b>K2.3</b> ■ 76 D	<b>K3.1</b> ■ 103 E	<b>K3.2</b> ■ 79 E
<b>K3.3</b> ■ 64 D	<b>K4.1</b> ■ 96 D	<b>K4.2</b> ■ 72 D	<b>K4.3</b> ■ 53 D	<b>K4.4</b> ■ 45 C	<b>K4.5</b> ■ 38 C	<b>K5.1</b> ■ 108 D	<b>K5.2</b> ■ 82 D	<b>K5.3</b> ■ 63 D	<b>N1.3</b> ▣ 89 F	<b>N2.1</b> ▣ 89 E	<b>N2.2</b> ■ 80 E	<b>N2.3</b> ■ 57 E	<b>N3.1</b> ■ 93 E
<b>N3.2</b> ■ 55 E	<b>N3.3</b> ■ 28 E	<b>N4.1</b> ▣ 93 E	<b>S1.1</b> ■ 50 D	<b>S1.2</b> ■ 40 D	<b>S1.3</b> ▣ 20 C	<b>S2.1</b> ■ 40 C	<b>S2.2</b> ▣ 21 C	<b>S3.1</b> ■ 30 C	<b>S3.2</b> ▣ 15 C	<b>S4.1</b> ■ 23 C	<b>S4.2</b> ▣ 12 C		


DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C3533.0	3.00	6.00	5.00	49.0	3	-	-
C3533.5	3.50	6.00	6.00	50.0	3	-	-
C3534.0	4.00	6.00	7.00	51.0	3	-	-
C3534.5	4.50	6.00	7.00	51.0	3	-	-
C3535.0	5.00	6.00	8.00	52.0	3	-	-
C3535.5	5.50	6.00	8.00	52.0	3	-	-
C3536.0	6.00	6.00	8.00	52.0	3	-	-
C3536.5	6.50	10.00	10.00	60.0	3	-	-
C3537.0	7.00	10.00	10.00	60.0	3	-	-
C3537.5	7.50	10.00	10.00	60.0	3	-	-
C3538.0	8.00	10.00	11.00	61.0	3	-	-
C3538.5	8.50	10.00	11.00	61.0	3	-	-
C3539.0	9.00	10.00	11.00	61.0	3	-	-
C3539.5	9.50	10.00	11.00	61.0	3	-	-
C35310.0	10.00	10.00	13.00	63.0	3	22.50	9.50
C35311.0	11.00	12.00	13.00	70.0	3	-	-
C35312.0	12.00	12.00	16.00	73.0	3	27.50	11.50
C35313.0	13.00	12.00	16.00	73.0	3	27.50	11.50
C35314.0	14.00	12.00	16.00	73.0	3	27.50	11.50
C35315.0	15.00	12.00	16.00	73.0	3	27.50	11.50
C35316.0	16.00	16.00	19.00	79.0	3	30.50	15.50
C35318.0	18.00	16.00	19.00	79.0	3	30.50	15.50
C35320.0	20.00	20.00	22.00	88.0	3	37.50	19.50
C35322.0	22.00	20.00	22.00	88.0	3	37.50	19.50
C35325.0	25.00	25.00	26.00	102.0	3	45.50	24.50




Product	DC	DCON MS	APMX	OAL	NOF	LU	DN
	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)
<b>C35328.0</b>	28.00	25.00	26.00	102.0	3	45.50	24.50
<b>C35330.0</b>	30.00	25.00	26.00	102.0	3	45.50	24.50

# C367



## 3-Flute HSS-E-PM Slot End Mill, Alcrona Coating

Extra short cut length, 3-flute design with a 40° helix. The sharp geometry is designed to machine mild steels, especially medium to high strength stainless steels and mild non-ferrous materials. The accurate diameter means that standard keyway slots to P9 tolerance can be milled. Alcrona coating extends tool life.

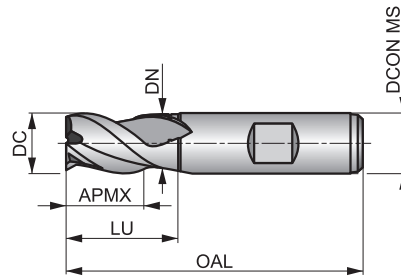

HSS-E PM	N	NOF 3
	40°	γ 15°
DIN 1835B	Alcrona	DC e8
	DIN 327D	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 135 E	<b>P1.2</b> ■ 151 E	<b>P1.3</b> ■ 157 E	<b>P2.1</b> ■ 116 E	<b>P2.2</b> ▣ 102 E	<b>P3.1</b> ▣ 94 E	<b>P3.2</b> ▣ 75 D	<b>P4.1</b> ▣ 56 D	<b>M1.1</b> ■ 92 E	<b>M1.2</b> ■ 78 E	<b>M2.1</b> ■ 82 E	<b>M2.2</b> ■ 67 D	<b>M2.3</b> ■ 56 D	<b>M3.1</b> ■ 64 D
<b>M3.2</b> ■ 55 D	<b>M3.3</b> ■ 50 C	<b>M4.1</b> ■ 35 C	<b>M4.2</b> ■ 30 C	<b>N1.1</b> ■ 177 G	<b>N1.2</b> ■ 133 F	<b>N1.3</b> ▣ 89 F	<b>N2.1</b> ▣ 89 E	<b>N2.2</b> ▣ 180 E	<b>N2.3</b> ▣ 57 E	<b>N3.1</b> ▣ 93 E	<b>N3.2</b> ▣ 55 E	<b>N3.3</b> ■ 28 E	<b>N4.1</b> ▣ 93 E
<b>S1.1</b> ▣ 50 D													

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C3672.0	2.00	6.00	4.00	48.0	3	–	–
C3673.0	3.00	6.00	5.00	49.0	3	–	–
C3674.0	4.00	6.00	7.00	51.0	3	–	–
C3675.0	5.00	6.00	8.00	52.0	3	–	–
C3676.0	6.00	6.00	8.00	52.0	3	–	–
C3677.0	7.00	10.00	10.00	60.0	3	–	–
C3678.0	8.00	10.00	11.00	61.0	3	–	–
C36710.0	10.00	10.00	13.00	63.0	3	22.50	9.50
C36711.0	11.00	12.00	13.00	70.0	3	–	–
C36712.0	12.00	12.00	16.00	73.0	3	27.50	11.50
C36714.0	14.00	12.00	16.00	73.0	3	27.50	11.50
C36716.0	16.00	16.00	19.00	79.0	3	30.50	15.50
C36718.0	18.00	16.00	19.00	79.0	3	30.50	15.50
C36720.0	20.00	20.00	22.00	88.0	3	37.50	19.50

# C305



## 3-Flute HSS-E-PM Slot End Mill, Bright Finish

Short cut length, 3-flute design provides high rigidity for milling slots whilst the accurate diameter means that standard keyway slots to P9 tolerance can be milled. Suitable also for ramping and profile milling in mild steels, non-ferrous materials and medium strength high temperature alloys.

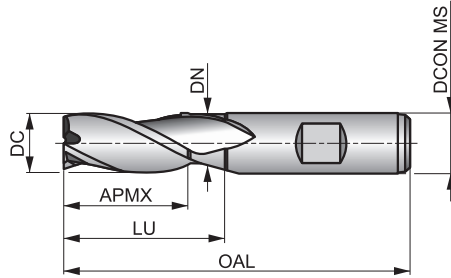

HSS-E PM	N	NOF 3
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835B	Bright	DC e8
	DIN 844K	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 52 D	<b>P1.2</b> ■ 58 D	<b>P1.3</b> ■ 60 D	<b>P2.1</b> ■ 44 D	<b>P2.2</b> ■ 39 D	<b>P3.1</b> ■ 36 D	<b>P3.2</b> ■ 29 C	<b>P4.1</b> ■ 21 C	<b>M1.1</b> ■ 36 D	<b>M1.2</b> ■ 30 D	<b>M2.1</b> ■ 32 D	<b>M2.2</b> ■ 26 C	<b>K1.1</b> ■ 30 D	<b>K1.2</b> ■ 22 D
<b>K1.3</b> ■ 17 D	<b>K2.1</b> ■ 55 D	<b>K2.2</b> ■ 45 D	<b>K2.3</b> ■ 36 C	<b>K3.1</b> ■ 49 D	<b>K3.2</b> ■ 37 D	<b>K3.3</b> ■ 30 B	<b>K4.1</b> ■ 45 C	<b>K4.2</b> ■ 34 C	<b>K4.3</b> ■ 25 C	<b>K4.4</b> ■ 22 B	<b>K4.5</b> ■ 18 B	<b>K5.1</b> ■ 51 C	<b>K5.2</b> ■ 39 C
<b>K5.3</b> ■ 30 C	<b>N1.3</b> ■ 48 E	<b>N2.1</b> ■ 48 D	<b>N2.2</b> ■ 43 D	<b>N2.3</b> ■ 31 D	<b>N3.1</b> ■ 50 D	<b>N3.2</b> ■ 29 D	<b>N3.3</b> ■ 15 D	<b>N4.1</b> ■ 50 D	<b>S1.1</b> ■ 29 C	<b>S1.2</b> ■ 24 C	<b>S2.1</b> ■ 17 B	<b>S3.1</b> ■ 13 B	<b>S4.1</b> ■ 10 B

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C3052.0	2.00	6.00	7.00	51.0	3	-	-
C3052.5	2.50	6.00	8.00	52.0	3	-	-
C3053.0	3.00	6.00	8.00	52.0	3	-	-
C3053.5	3.50	6.00	10.00	54.0	3	-	-
C3054.0	4.00	6.00	11.00	55.0	3	-	-
C3054.5	4.50	6.00	11.00	55.0	3	-	-
C3055.0	5.00	6.00	13.00	57.0	3	-	-
C3055.5	5.50	6.00	13.00	57.0	3	-	-
C3056.0	6.00	6.00	13.00	57.0	3	-	-
C3056.5	6.50	10.00	16.00	66.0	3	-	-
C3057.0	7.00	10.00	16.00	66.0	3	-	-
C3057.5	7.50	10.00	16.00	66.0	3	-	-
C3058.0	8.00	10.00	19.00	69.0	3	-	-
C3058.5	8.50	10.00	19.00	69.0	3	-	-
C3059.0	9.00	10.00	19.00	69.0	3	-	-
C30510.0	10.00	10.00	22.00	72.0	3	31.50	9.50
C30511.0	11.00	12.00	22.00	79.0	3	-	-
C30512.0	12.00	12.00	26.00	83.0	3	37.50	11.50
C30513.0	13.00	12.00	26.00	83.0	3	37.50	11.50
C30514.0	14.00	12.00	26.00	83.0	3	37.50	11.50
C30515.0	15.00	12.00	26.00	83.0	3	37.50	11.50
C30516.0	16.00	16.00	32.00	92.0	3	43.50	15.50
C30517.0	17.00	16.00	32.00	92.0	3	43.50	15.50
C30518.0	18.00	16.00	32.00	92.0	3	43.50	15.50
C30519.0	19.00	16.00	32.00	92.0	3	43.50	15.50
C30520.0	20.00	20.00	38.00	104.0	3	53.50	19.50
C30522.0	22.00	20.00	38.00	104.0	3	53.50	19.50




Product	DC	DCON MS	APMX	OAL	NOF	LU	DN
	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)
<b>C30525.0</b>	25.00	25.00	45.00	121.0	3	–	–
<b>C30528.0</b>	28.00	25.00	45.00	121.0	3	–	–
<b>C30532.0</b>	32.00	32.00	53.00	133.0	3	–	–

# C352



## 3-Flute HSS-E-PM Slot End Mill, Alcrona Coating

Short cut length, 3-flute design provides high rigidity for milling slots whilst the accurate diameter means that standard keyway slots to P9 tolerance can be milled. Suitable also for ramping and profile milling in mild materials. Alcrona coating improves performance and extends the tool life.

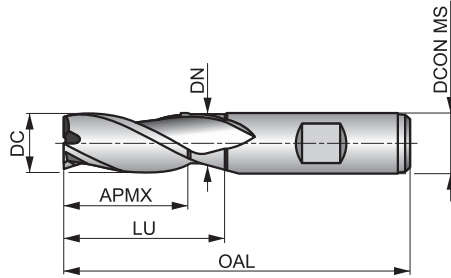

HSS-E PM	N	NOF 3
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835B	Alcrona	DC e8
	DIN 844K	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 126 D	<b>P1.2</b> ■ 141 D	<b>P1.3</b> ■ 146 D	<b>P2.1</b> ■ 108 D	<b>P2.2</b> ■ 95 D	<b>P2.3</b> ■ 84 C	<b>P3.1</b> ■ 81 D	<b>P3.2</b> ■ 65 C	<b>P3.3</b> ■ 55 C	<b>P4.1</b> ■ 48 C	<b>P4.2</b> ■ 41 C	<b>P4.3</b> ▣ 34 C	<b>M1.1</b> ▣ 69 D	<b>M1.2</b> ▣ 58 D
<b>M2.1</b> ▣ 61 D	<b>M2.2</b> ▣ 50 C	<b>M3.1</b> ▣ 47 C	<b>M3.2</b> ▣ 40 C	<b>M3.3</b> ▣ 36 B	<b>M4.1</b> ▣ 25 B	<b>K1.1</b> ■ 60 D	<b>K1.2</b> ■ 44 D	<b>K1.3</b> ■ 33 D	<b>K2.1</b> ■ 111 D	<b>K2.2</b> ■ 90 D	<b>K2.3</b> ■ 72 C	<b>K3.1</b> ■ 98 D	<b>K3.2</b> ■ 75 D
<b>K3.3</b> ■ 61 B	<b>K4.1</b> ■ 91 C	<b>K4.2</b> ■ 68 C	<b>K4.3</b> ■ 50 C	<b>K4.4</b> ■ 43 B	<b>K4.5</b> ■ 36 B	<b>K5.1</b> ■ 103 C	<b>K5.2</b> ■ 77 C	<b>K5.3</b> ■ 60 C	<b>N1.3</b> ▣ 89 E	<b>N2.1</b> ▣ 89 D	<b>N2.2</b> ■ 80 D	<b>N2.3</b> ■ 57 D	<b>N3.1</b> ■ 93 D
<b>N3.2</b> ■ 55 D	<b>N3.3</b> ■ 28 D	<b>N4.1</b> ▣ 93 D	<b>S1.1</b> ■ 45 C	<b>S1.2</b> ■ 35 C	<b>S1.3</b> ▣ 15 B	<b>S2.1</b> ■ 33 B	<b>S2.2</b> ▣ 14 B	<b>S3.1</b> ■ 25 B	<b>S3.2</b> ▣ 10 B	<b>S4.1</b> ■ 20 B	<b>S4.2</b> ▣ 8 B		

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C3523.0	3.00	6.00	8.00	52.0	3	–	–
C3524.0	4.00	6.00	11.00	55.0	3	–	–
C3525.0	5.00	6.00	13.00	57.0	3	–	–
C3526.0	6.00	6.00	13.00	57.0	3	–	–
C3528.0	8.00	10.00	19.00	69.0	3	–	–
C35210.0	10.00	10.00	22.00	72.0	3	31.50	9.50
C35212.0	12.00	12.00	26.00	83.0	3	37.50	11.50
C35214.0	14.00	12.00	26.00	83.0	3	37.50	11.50
C35216.0	16.00	16.00	32.00	92.0	3	43.50	15.50
C35218.0	18.00	16.00	32.00	92.0	3	43.50	15.50
C35220.0	20.00	20.00	38.00	104.0	3	53.50	19.50

# C346



## 3-Flute HSS-E Long Series End Mill, Bright Finish

Long cut length, 3-flute design provides high rigidity for standard slotting and profile milling in mild steels and non-ferrous materials. Long series cutter designed for machining deeper slots and walls in places which are difficult to reach.

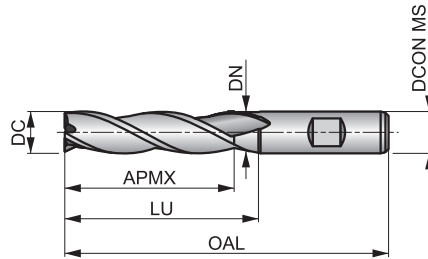

HSS-E	N	NOF 3
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835B	Bright	DC e8
	DIN 844L	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 40 C	<b>P1.2</b> ■ 45 C	<b>P1.3</b> ■ 46 C	<b>P2.1</b> ■ 34 C	<b>P2.2</b> ■ 30 C	<b>P3.1</b> ■ 28 C	<b>P3.2</b> ■ 22 B	<b>P4.1</b> ■ 16 B	<b>M1.1</b> ■ 27 C	<b>M1.2</b> ■ 23 C	<b>M2.1</b> ■ 24 C	<b>M2.2</b> ■ 20 B	<b>K1.1</b> ■ 25 C	<b>K1.2</b> ■ 19 C
<b>K1.3</b> ■ 14 C	<b>K2.1</b> ■ 43 C	<b>K2.2</b> ■ 35 C	<b>K2.3</b> ■ 28 B	<b>K3.1</b> ■ 38 C	<b>K3.2</b> ■ 29 C	<b>K3.3</b> ■ 24 A	<b>K4.1</b> ■ 35 B	<b>K4.2</b> ■ 27 B	<b>K4.3</b> ■ 20 B	<b>K4.4</b> ■ 17 A	<b>K4.5</b> ■ 14 A	<b>K5.1</b> ■ 40 B	<b>K5.2</b> ■ 30 B
<b>K5.3</b> ■ 23 B	<b>N1.1</b> ■ 76 E	<b>N1.2</b> ■ 57 D	<b>N1.3</b> ■ 38 D	<b>N3.1</b> ■ 40 C	<b>N3.2</b> ■ 23 C	<b>N3.3</b> ■ 12 C	<b>N4.1</b> ■ 40 C	<b>S1.1</b> ■ 25 B	<b>S1.2</b> ■ 20 B	<b>S2.1</b> ■ 13 A	<b>S3.1</b> ■ 10 A	<b>S4.1</b> ■ 8 A	

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C3463.0	3.00	6.00	12.00	56.0	3	–	–
C3464.0	4.00	6.00	19.00	63.0	3	–	–
C3465.0	5.00	6.00	24.00	68.0	3	–	–
C3466.0	6.00	6.00	24.00	68.0	3	–	–
C3467.0	7.00	10.00	30.00	80.0	3	–	–
C3468.0	8.00	10.00	38.00	88.0	3	–	–
C3469.0	9.00	10.00	38.00	88.0	3	–	–
C34610.0	10.00	10.00	45.00	95.0	3	–	–
C34611.0	11.00	12.00	45.00	102.0	3	–	–
C34612.0	12.00	12.00	53.00	110.0	3	–	–
C34613.0	13.00	12.00	53.00	110.0	3	64.50	11.50
C34615.0	15.00	12.00	53.00	110.0	3	64.50	11.50
C34616.0	16.00	16.00	63.00	123.0	3	74.50	15.50
C34620.0	20.00	20.00	75.00	141.0	3	90.50	19.50

Material code (BMC)	HSS-E PM	HSS-E	HSS-E	HSS-E PM	HSS-E PM	HSS-E PM	HSS-E PM	HSS-E PM						
Mill Profile	HRA	NF	NF	NRA	HRA	NRA	HRA	NRA						
Number of flutes (NOF)	NOF 3-4	NOF 4	NOF 4	NOF 4	NOF 4-6	NOF 4-6	NOF 3-6	NOF 4-6						
Cut length														
Flute Helix (FHA)	$\lambda$ 35°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 35°	$\lambda$ 35°	$\lambda$ 35°	$\lambda$ 35°	$\lambda$ 35°						
Flute Helix (FHA)	$\lambda$ 35°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 35°	$\lambda$ 35°	$\lambda$ 35°	$\lambda$ 35°	$\lambda$ 35°						
Radial rake angle (GAMF)	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°						
Shank	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835B						
Coating	Alcrona	Bright	TiCN	Bright	Alcrona	Alcrona	Alcrona	Alcrona						
Cutting diameter tolerance class (TCDC)	DC k12	DC k12	DC k12	DC k12	DC k12	DC k12	DC k12	DC k12						
Direction														
Basic standard group (BSG)	DIN 844K	DIN 844K	DIN 844K	DIN 844K	DIN 844K	DIN 844K	DIN 844L	DIN 844L						


Product Family Code		C922	C400	C413	C407	C428	C908	C492	C948					
PSF cutting diameters range		6.00 – 24.00	6.00 – 20.00	6.00 – 20.00	6.00 – 20.00	6.00 – 32.00	6.00 – 32.00	6.00 – 30.00	6.00 – 32.00					
		26	27	28	29	30	31	32	33					
<b>P</b>	P1		■	■	■									
	P2	▣	■	■	■	▣	■	■	■					
	P3	■	▣	■	■	■	■	■	■					
	P4	■	▣	▣	■	■	■	■	■					
<b>M</b>	M1	■	▣	▣	■	■	■	■	■					
	M2	■	▣	▣	■	■	■	■	■					
	M3	■	■	▣	▣	■	■	■	■					
	M4	■	■	▣	■	■	■	■	■					
<b>K</b>	K1	■	▣	■	■	■	■	■	■					
	K2	■	▣	■	■	■	■	■	■					
	K3	■	▣	■	■	■	■	■	■					
	K4	■	▣	■	■	■	■	■	■					
	K5	■	▣	■	■	■	■	■	■					
<b>N</b>	N1		▣	▣										
	N2		▣	▣										
	N3	■	■	■	■	■	■	■	■					
	N4		▣	▣										
	N5													
<b>S</b>	S1	■	▣	▣	■	■	■	■	■					
	S2	■	▣	▣	■	■	■	■	■					
	S3	■	▣	▣	■	■	■	■	■					
	S4	■	▣	▣	■	■	■	■	■					
<b>H</b>	H1													
	H2													
	H3													
	H4													

# C922



## 3-4 Flute HSS-E-PM Roughing End Mill, Alcrona Coating

Short cut length, 3 or 4 flute design with neck recess on big cutting diameter sizes and an HRA profile to break up the chips for efficient roughing application. A 35° helix reduces vibration and improves performance. Alcrona coating improves performance and extends the tool life.

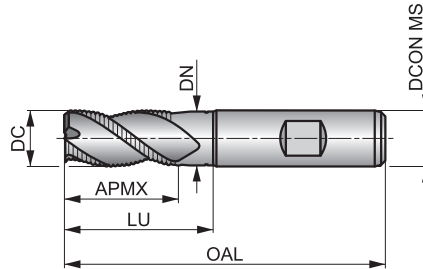

<b>HSS-E PM</b>	<b>HRA</b>	<b>NOF 3-4</b>
	$\lambda$ 35°	$\gamma$ 12°
<b>DIN 1835B</b>	<b>Alcrona</b>	<b>DC k12</b>
	<b>DIN 844K</b>	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P2.2</b> ■ 95 F	<b>P2.3</b> ■ 84 E	<b>P3.1</b> ■ 81 F	<b>P3.2</b> ■ 65 E	<b>P3.3</b> ■ 55 E	<b>P4.1</b> ■ 48 E	<b>P4.2</b> ■ 41 E	<b>P4.3</b> ■ 34 E	<b>M1.1</b> ■ 69 F	<b>M1.2</b> ■ 58 F	<b>M2.1</b> ■ 61 F	<b>M2.2</b> ■ 50 E	<b>M3.1</b> ■ 47 E	<b>M3.2</b> ■ 40 E
<b>M3.3</b> ■ 36 D	<b>M4.1</b> ■ 25 D	<b>K1.1</b> ■ 60 F	<b>K1.2</b> ■ 44 F	<b>K1.3</b> ■ 33 F	<b>K2.1</b> ■ 111 F	<b>K2.2</b> ■ 90 F	<b>K2.3</b> ■ 72 E	<b>K3.1</b> ■ 98 F	<b>K3.2</b> ■ 75 F	<b>K3.3</b> ■ 61 E	<b>K4.1</b> ■ 91 E	<b>K4.2</b> ■ 68 E	<b>K4.3</b> ■ 50 E
<b>K4.4</b> ■ 43 D	<b>K4.5</b> ■ 36 D	<b>K5.1</b> ■ 103 E	<b>K5.2</b> ■ 77 E	<b>K5.3</b> ■ 60 E	<b>N3.1</b> ■ 93 F	<b>N3.2</b> ■ 55 F	<b>S1.1</b> ■ 45 E	<b>S1.2</b> ■ 35 E	<b>S1.3</b> ■ 15 D	<b>S2.1</b> ■ 33 D	<b>S2.2</b> ■ 14 D	<b>S3.1</b> ■ 25 D	<b>S3.2</b> ■ 10 D
<b>S4.1</b> ■ 20 D	<b>S4.2</b> ■ 8 D												

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C9226.0	6.00	6.00	13.00	57.0	3	–	–
C9227.0	7.00	10.00	16.00	66.0	3	–	–
C9228.0	8.00	10.00	19.00	69.0	3	–	–
C9229.0	9.00	10.00	19.00	69.0	3	–	–
C92210.0	10.00	10.00	22.00	72.0	3	31.50	9.50
C92211.0	11.00	12.00	22.00	79.0	3	–	–
C92212.0	12.00	12.00	26.00	83.0	3	37.50	11.50
C92213.0	13.00	12.00	26.00	83.0	3	37.50	11.50
C92214.0	14.00	12.00	26.00	83.0	3	37.50	11.50
C92215.0	15.00	12.00	26.00	83.0	3	37.50	11.50
C92216.0	16.00	16.00	32.00	92.0	3	43.50	15.50
C92218.0	18.00	16.00	32.00	92.0	3	43.50	15.50
C92220.0	20.00	20.00	38.00	104.0	3	53.50	19.50
C92222.0	22.00	20.00	38.00	104.0	3	53.50	19.50
C92224.0	24.00	25.00	45.00	121.0	4	64.50	23.50


# C400



## 4-Flute HSS-E Roughing End Mill, Bright Finish

Short cut length, 4-flute design without center cut, for peripheral roughing operations only. The NF profile breaks chips for an efficient roughing operation. A 30° helix reduces vibrations and improves performance when roughing mild materials.

<b>HSS-E</b>	<b>NF</b>	<b>NOF 4</b>
	$\lambda$ <b>30°</b>	$\gamma$ <b>12°</b>
<b>DIN 1835B</b>	Bright	<b>DC k12</b>
	<b>DIN 844K</b>	

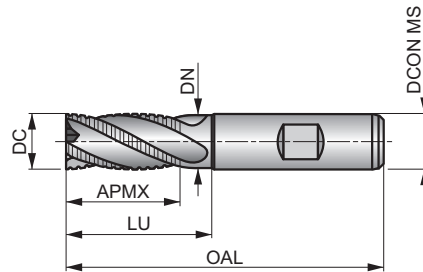

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 46 E	<b>P1.2</b> ■ 52 E	<b>P1.3</b> ■ 54 E	<b>P2.1</b> ■ 40 E	<b>P2.2</b> ■ 35 E	<b>P3.1</b> ▣ 32 E	<b>P3.2</b> ▣ 26 D	<b>P4.1</b> ▣ 19 D	<b>M1.1</b> ▣ 34 E	<b>M1.2</b> ▣ 29 E	<b>M2.1</b> ▣ 31 E	<b>M2.2</b> ▣ 25 D	<b>K1.1</b> ▣ 30 E	<b>K1.2</b> ▣ 22 E
<b>K1.3</b> ▣ 17 E	<b>K2.1</b> ▣ 49 E	<b>K2.2</b> ▣ 40 E	<b>K2.3</b> ▣ 32 D	<b>K3.1</b> ▣ 44 E	<b>K3.2</b> ▣ 33 E	<b>K3.3</b> ▣ 27 D	<b>K4.1</b> ▣ 40 D	<b>K4.2</b> ▣ 30 D	<b>K4.3</b> ▣ 22 D	<b>K4.4</b> ▣ 19 C	<b>K4.5</b> ▣ 16 C	<b>K5.1</b> ▣ 46 D	<b>K5.2</b> ▣ 34 D
<b>K5.3</b> ▣ 27 D	<b>N1.3</b> ▣ 41 F	<b>N2.1</b> ▣ 41 E	<b>N2.2</b> ▣ 37 E	<b>N2.3</b> ▣ 26 E	<b>N3.1</b> ■ 43 E	<b>N3.2</b> ■ 25 E	<b>N3.3</b> ▣ 13 E	<b>N4.1</b> ▣ 43 E	<b>S1.1</b> ▣ 30 D	<b>S1.2</b> ▣ 25 D	<b>S2.1</b> ▣ 20 C	<b>S3.1</b> ▣ 15 C	<b>S4.1</b> ▣ 12 C

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
<b>C4006.0</b>	6.00	6.00	13.00	57.0	4	–	–
<b>C4008.0</b>	8.00	10.00	19.00	69.0	4	–	–
<b>C40010.0</b>	10.00	10.00	22.00	72.0	4	–	–
<b>C40012.0</b>	12.00	12.00	26.00	83.0	4	–	–
<b>C40014.0</b>	14.00	12.00	26.00	83.0	4	37.50	11.50
<b>C40016.0</b>	16.00	16.00	32.00	92.0	4	43.50	15.50
<b>C40018.0</b>	18.00	16.00	32.00	92.0	4	43.50	15.50
<b>C40020.0</b>	20.00	20.00	38.00	104.0	4	53.50	19.50

# C413



## 4-Flute HSS-E Roughing End Mill, TiCN Coating

Short cut length, 4-flute design for peripheral roughing operations only. The NF profile breaks chips for an efficient roughing application. A 30° helix reduces vibrations and improves performance in roughing. TiCN coating increases the life of the cutter and improves performance when milling hard and abrasive materials.

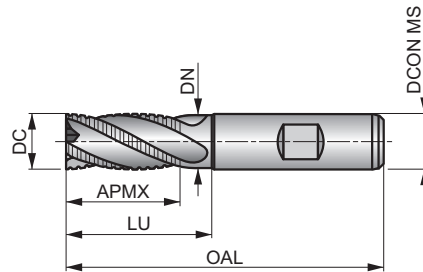

HSS-E	NF	NOF 4
	λ 30°	γ 12°
DIN 1835B	TiCN	DC k12
	DIN 844K	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 93 E	<b>P1.2</b> ■ 104 E	<b>P1.3</b> ■ 108 E	<b>P2.1</b> ■ 80 E	<b>P2.2</b> ■ 70 E	<b>P2.3</b> ▧ 62 D	<b>P3.1</b> ■ 59 E	<b>P3.2</b> ■ 47 D	<b>P3.3</b> ▧ 40 D	<b>P4.1</b> ■ 35 D	<b>P4.2</b> ▧ 30 D	<b>P4.3</b> ▧ 24 D	<b>M1.1</b> ▧ 48 E	<b>M1.2</b> ▧ 41 E
<b>M2.1</b> ▧ 43 E	<b>M2.2</b> ▧ 35 D	<b>M3.3</b> ▧ 21 C	<b>M4.1</b> ▧ 20 C	<b>K1.1</b> ■ 45 E	<b>K1.2</b> ■ 33 E	<b>K1.3</b> ■ 25 E	<b>K2.1</b> ■ 80 E	<b>K2.2</b> ■ 65 E	<b>K2.3</b> ■ 52 D	<b>K3.1</b> ■ 71 E	<b>K3.2</b> ■ 54 E	<b>K3.3</b> ■ 44 D	<b>K4.1</b> ■ 66 D
<b>K4.2</b> ■ 49 D	<b>K4.3</b> ■ 36 D	<b>K4.4</b> ■ 31 C	<b>K4.5</b> ■ 26 C	<b>K5.1</b> ■ 74 D	<b>K5.2</b> ■ 56 D	<b>K5.3</b> ■ 43 D	<b>N1.3</b> ▧ 82 F	<b>N2.1</b> ▧ 182 E	<b>N2.2</b> ■ 74 E	<b>N2.3</b> ■ 52 E	<b>N3.1</b> ■ 86 E	<b>N3.2</b> ■ 50 E	<b>N3.3</b> ▧ 126 E
<b>N4.1</b> ▧ 86 E	<b>S1.1</b> ▧ 35 D	<b>S1.2</b> ■ 30 D	<b>S1.3</b> ▧ 10 C	<b>S2.1</b> ■ 27 C	<b>S2.2</b> ▧ 14 C	<b>S3.1</b> ■ 20 C	<b>S3.2</b> ▧ 10 C	<b>S4.1</b> ■ 16 C	<b>S4.2</b> ▧ 8 C				

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
<b>C4136.0</b>	6.00	6.00	13.00	57.0	4	–	–
<b>C4138.0</b>	8.00	10.00	19.00	69.0	4	–	–
<b>C41310.0</b>	10.00	10.00	22.00	72.0	4	–	–
<b>C41312.0</b>	12.00	12.00	26.00	83.0	4	–	–
<b>C41314.0</b>	14.00	12.00	26.00	83.0	4	37.50	11.50
<b>C41316.0</b>	16.00	16.00	32.00	92.0	4	43.50	15.50
<b>C41318.0</b>	18.00	16.00	32.00	92.0	4	43.50	15.50
<b>C41320.0</b>	20.00	20.00	38.00	104.0	4	53.50	19.50


# C407



## 4-Flute HSS-E-PM Roughing End Mill, Bright Finish

Short cut length, 4-flute design with neck recess on big cutting diameter sizes and an NRA profile to break chips for efficient roughing applications. A 35° helix reduces vibration and improves performance in roughing operations.

<b>HSS-E PM</b>	<b>NRA</b>	<b>NOF 4</b>
	$\lambda$ <b>35°</b>	$\gamma$ <b>12°</b>
<b>DIN 1835B</b>	Bright	<b>DC k12</b>
	<b>DIN 844K</b>	

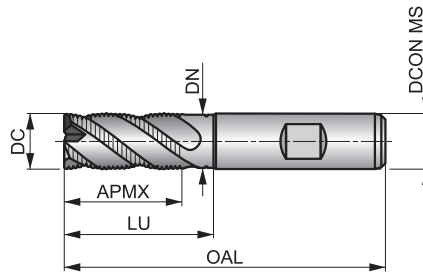

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 50 G	<b>P1.2</b> ■ 56 G	<b>P1.3</b> ■ 58 G	<b>P2.1</b> ■ 43 G	<b>P2.2</b> ■ 38 G	<b>P2.3</b> ■ 34 F	<b>P3.1</b> ■ 32 G	<b>P3.2</b> ■ 26 F	<b>P3.3</b> ■ 22 F	<b>P4.1</b> ■ 19 F	<b>P4.2</b> ■ 16 F	<b>P4.3</b> ■ 13 F	<b>M1.1</b> ■ 34 G	<b>M1.2</b> ■ 29 G
<b>M2.1</b> ■ 31 G	<b>M2.2</b> ■ 25 F	<b>M3.1</b> ■ 24 F	<b>M3.2</b> ■ 21 F	<b>M3.3</b> ■ 19 E	<b>M4.1</b> ■ 13 E	<b>K1.1</b> ■ 30 G	<b>K1.2</b> ■ 22 G	<b>K1.3</b> ■ 17 G	<b>K2.1</b> ■ 54 G	<b>K2.2</b> ■ 44 G	<b>K2.3</b> ■ 35 F	<b>K3.1</b> ■ 48 G	<b>K3.2</b> ■ 37 G
<b>K3.3</b> ■ 30 F	<b>K4.1</b> ■ 44 F	<b>K4.2</b> ■ 33 F	<b>K4.3</b> ■ 25 F	<b>K4.4</b> ■ 21 E	<b>K4.5</b> ■ 18 E	<b>K5.1</b> ■ 50 F	<b>K5.2</b> ■ 38 F	<b>K5.3</b> ■ 29 F	<b>N3.1</b> ■ 43 G	<b>N3.2</b> ■ 25 G	<b>S1.1</b> ■ 30 F	<b>S1.2</b> ■ 25 F	<b>S1.3</b> ■ 11 E
<b>S2.1</b> ■ 19 E	<b>S2.2</b> ■ 8 E	<b>S3.1</b> ■ 14 E	<b>S3.2</b> ■ 6 E	<b>S4.1</b> ■ 11 E	<b>S4.2</b> ■ 5 E								

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C4076.0	6.00	6.00	13.00	57.0	4	–	–
C4077.0	7.00	10.00	16.00	66.0	4	–	–
C4078.0	8.00	10.00	19.00	69.0	4	–	–
C4079.0	9.00	10.00	19.00	69.0	4	–	–
C40710.0	10.00	10.00	22.00	72.0	4	31.50	9.50
C40711.0	11.00	12.00	22.00	79.0	4	–	–
C40712.0	12.00	12.00	26.00	83.0	4	37.50	11.50
C40713.0	13.00	12.00	26.00	83.0	4	37.50	11.50
C40714.0	14.00	12.00	26.00	83.0	4	37.50	11.50
C40716.0	16.00	16.00	32.00	92.0	4	43.50	15.50
C40718.0	18.00	16.00	32.00	92.0	4	43.50	15.50
C40720.0	20.00	20.00	38.00	104.0	4	53.50	19.50


# C428



## Multi-Flute HSS-E-PM Roughing End Mill, Alcrona Coating

Short cut length, 4 or 6 flute design with neck recess on big cutting diameter sizes and an HRA profile to break chips for efficient roughing application. A 35° helix reduces vibration and improves performance. Alcrona coating improves performance and extends the tool life.

<b>HSS-E PM</b>	<b>HRA</b>	<b>NOF 4-6</b>
	$\lambda$ 35°	$\gamma$ 12°
<b>DIN 1835B</b>	<b>Alcrona</b>	<b>DC k12</b>
	<b>DIN 844K</b>	

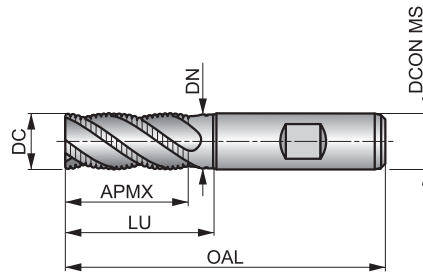

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P2.2</b> ■ 93 F	<b>P2.3</b> ■ 82 E	<b>P3.1</b> ■ 80 F	<b>P3.2</b> ■ 64 E	<b>P3.3</b> ■ 54 E	<b>P4.1</b> ■ 48 E	<b>P4.2</b> ■ 40 E	<b>P4.3</b> ■ 33 E	<b>M1.1</b> ■ 66 F	<b>M1.2</b> ■ 56 F	<b>M2.1</b> ■ 59 F	<b>M2.2</b> ■ 48 E	<b>M3.1</b> ■ 47 E	<b>M3.2</b> ■ 40 E
<b>M3.3</b> ■ 36 D	<b>M4.1</b> ■ 26 D	<b>K1.1</b> ■ 61 F	<b>K1.2</b> ■ 45 F	<b>K1.3</b> ■ 34 F	<b>K2.1</b> ■ 108 F	<b>K2.2</b> ■ 88 F	<b>K2.3</b> ■ 70 E	<b>K3.1</b> ■ 96 F	<b>K3.2</b> ■ 73 F	<b>K3.3</b> ■ 59 E	<b>K4.1</b> ■ 89 E	<b>K4.2</b> ■ 67 E	<b>K4.3</b> ■ 49 E
<b>K4.4</b> ■ 42 D	<b>K4.5</b> ■ 35 D	<b>K5.1</b> ■ 100 E	<b>K5.2</b> ■ 76 E	<b>K5.3</b> ■ 58 E	<b>N3.1</b> ■ 116 F	<b>N3.2</b> ■ 68 F	<b>S1.1</b> ■ 46 E	<b>S1.2</b> ■ 37 E	<b>S1.3</b> ■ 16 D	<b>S2.1</b> ■ 36 D	<b>S2.2</b> ■ 16 D	<b>S3.1</b> ■ 27 D	<b>S3.2</b> ■ 11 D
<b>S4.1</b> ■ 21 D	<b>S4.2</b> ■ 9 D												

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C4286.0	6.00	6.00	13.00	57.0	4	–	–
C4287.0	7.00	10.00	16.00	66.0	4	–	–
C4288.0	8.00	10.00	19.00	69.0	4	–	–
C4289.0	9.00	10.00	19.00	69.0	4	–	–
C42810.0	10.00	10.00	22.00	72.0	4	31.50	9.50
C42811.0	11.00	12.00	22.00	79.0	4	–	–
C42812.0	12.00	12.00	26.00	83.0	4	37.50	11.50
C42813.0	13.00	12.00	26.00	83.0	4	37.50	11.50
C42814.0	14.00	12.00	26.00	83.0	4	37.50	11.50
C42815.0	15.00	12.00	26.00	83.0	4	37.50	11.50
C42816.0	16.00	16.00	32.00	92.0	4	43.50	15.50
C42818.0	18.00	16.00	32.00	92.0	4	43.50	15.50
C42820.0	20.00	20.00	38.00	104.0	4	53.50	19.50
C42822.0	22.00	20.00	38.00	104.0	4	53.50	19.50
C42825.0	25.00	25.00	45.00	121.0	6	64.50	24.50
C42828.0	28.00	25.00	45.00	121.0	6	64.50	24.50
C42830.0	30.00	25.00	45.00	121.0	6	64.50	24.50
C42832.0	32.00	32.00	53.00	133.0	6	72.50	31.50


# C908



## Multi-Flute HSS-E-PM Roughing End Mill, Alcrona Coating

Short cut length, 4 or 6 flute design with neck recess on big cutting diameter sizes and an NRA profile to break chips for efficient roughing application. A 35° helix reduces vibration and improves performance in roughing operations. Alcrona coating improves performance and extends the tool life.

<b>HSS-E PM</b>	<b>NRA</b>	<b>NOF 4-6</b>
	$\lambda$ 35°	$\gamma$ 12°
<b>DIN 1835B</b>	<b>Alcrona</b>	<b>DC k12</b>
	<b>DIN 844K</b>	

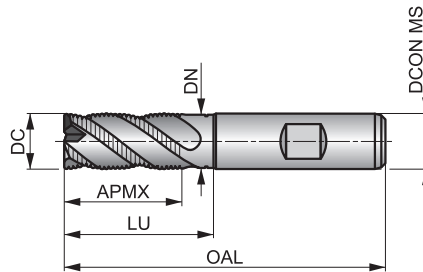

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P2.2</b> ■ 93 G	<b>P2.3</b> ■ 82 F	<b>P3.1</b> ■ 80 G	<b>P3.2</b> ■ 64 F	<b>P3.3</b> ■ 54 F	<b>P4.1</b> ■ 48 F	<b>P4.2</b> ■ 40 F	<b>P4.3</b> ■ 33 F	<b>M1.1</b> ■ 66 G	<b>M1.2</b> ■ 56 G	<b>M2.1</b> ■ 59 G	<b>M2.2</b> ■ 48 F	<b>M3.1</b> ■ 47 F	<b>M3.2</b> ■ 40 F
<b>M3.3</b> ■ 36 E	<b>M4.1</b> ■ 26 E	<b>K1.1</b> ■ 61 G	<b>K1.2</b> ■ 45 G	<b>K1.3</b> ■ 34 G	<b>K2.1</b> ■ 108 G	<b>K2.2</b> ■ 88 G	<b>K2.3</b> ■ 70 F	<b>K3.1</b> ■ 96 G	<b>K3.2</b> ■ 73 G	<b>K3.3</b> ■ 59 F	<b>K4.1</b> ■ 89 F	<b>K4.2</b> ■ 67 F	<b>K4.3</b> ■ 49 F
<b>K4.4</b> ■ 42 E	<b>K4.5</b> ■ 35 E	<b>K5.1</b> ■ 100 F	<b>K5.2</b> ■ 76 F	<b>K5.3</b> ■ 58 F	<b>N3.1</b> ■ 93 G	<b>N3.2</b> ■ 55 G	<b>S1.1</b> ■ 46 F	<b>S1.2</b> ■ 37 F	<b>S1.3</b> ■ 16 E	<b>S2.1</b> ■ 36 E	<b>S2.2</b> ■ 16 E	<b>S3.1</b> ■ 27 E	<b>S3.2</b> ■ 11 E
<b>S4.1</b> ■ 21 E	<b>S4.2</b> ■ 9 E												

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C9086.0	6.00	6.00	13.00	57.0	4	–	–
C9087.0	7.00	10.00	16.00	66.0	4	–	–
C9088.0	8.00	10.00	19.00	69.0	4	–	–
C9089.0	9.00	10.00	19.00	69.0	4	–	–
C90810.0	10.00	10.00	22.00	72.0	4	31.50	9.50
C90811.0	11.00	12.00	22.00	79.0	4	–	–
C90812.0	12.00	12.00	26.00	83.0	4	37.50	11.50
C90813.0	13.00	12.00	26.00	83.0	4	37.50	11.50
C90814.0	14.00	12.00	26.00	83.0	4	37.50	11.50
C90816.0	16.00	16.00	32.00	92.0	4	43.50	15.50
C90818.0	18.00	16.00	32.00	92.0	4	43.50	15.50
C90820.0	20.00	20.00	38.00	104.0	4	53.50	19.50
C90822.0	22.00	20.00	38.00	104.0	4	53.50	19.50
C90825.0	25.00	25.00	45.00	121.0	6	64.50	24.50
C90830.0	30.00	25.00	45.00	121.0	6	64.50	24.50
C90832.0	32.00	32.00	53.00	133.0	6	72.50	31.50

# C492



## Multi-Flute HSS-E-PM Long Series Roughing End Mill, Alcrona Coating

Long cut length, 3, 4 or 6 flute design with an HRA profile to break chips for efficient roughing of deep profiles. Neck recess on cutting diameter equal to 10 mm and above. A 35° helix reduces vibration and improves performance when roughing. Alcrona coating improves performance and extends tool life.

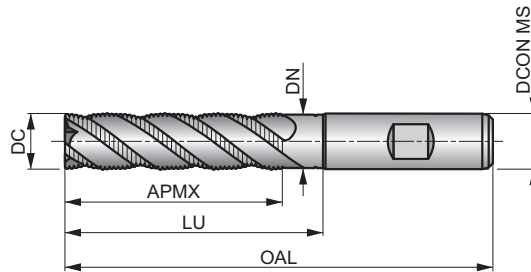

<b>HSS-E PM</b>	<b>HRA</b>	<b>NOF 3-6</b>
	$\lambda$ 35°	$\gamma$ 12°
<b>DIN 1835B</b>	<b>Alcrona</b>	<b>DC k12</b>
	<b>DIN 844L</b>	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P2.2</b> ■ 83 E	<b>P2.3</b> ■ 73 D	<b>P3.1</b> ■ 72 E	<b>P3.2</b> ■ 58 D	<b>P3.3</b> ■ 49 D	<b>P4.1</b> ■ 43 D	<b>P4.2</b> ■ 37 D	<b>P4.3</b> ■ 30 D	<b>M1.1</b> ■ 59 E	<b>M1.2</b> ■ 50 E	<b>M2.1</b> ■ 53 E	<b>M2.2</b> ■ 43 D	<b>M3.1</b> ■ 42 D	<b>M3.2</b> ■ 36 D
<b>M3.3</b> ■ 32 C	<b>M4.1</b> ■ 23 C	<b>K1.1</b> ■ 55 E	<b>K1.2</b> ■ 41 E	<b>K1.3</b> ■ 31 E	<b>K2.1</b> ■ 97 E	<b>K2.2</b> ■ 79 E	<b>K2.3</b> ■ 63 D	<b>K3.1</b> ■ 86 E	<b>K3.2</b> ■ 66 E	<b>K3.3</b> ■ 53 D	<b>K4.1</b> ■ 80 D	<b>K4.2</b> ■ 60 D	<b>K4.3</b> ■ 44 D
<b>K4.4</b> ■ 38 C	<b>K4.5</b> ■ 31 C	<b>K5.1</b> ■ 90 D	<b>K5.2</b> ■ 68 D	<b>K5.3</b> ■ 52 D	<b>N3.1</b> ■ 104 E	<b>N3.2</b> ■ 61 E	<b>S1.1</b> ■ 41 D	<b>S1.2</b> ■ 34 D	<b>S1.3</b> ■ 15 C	<b>S2.1</b> ■ 32 C	<b>S2.2</b> ■ 14 C	<b>S3.1</b> ■ 24 C	<b>S3.2</b> ■ 10 C
<b>S4.1</b> ■ 19 C	<b>S4.2</b> ■ 8 C												

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
<b>C4926.0</b>	6.00	6.00	24.00	68.0	3	–	–
<b>C4928.0</b>	8.00	10.00	38.00	88.0	3	–	–
<b>C49210.0</b>	10.00	10.00	45.00	95.0	4	54.50	9.50
<b>C49212.0</b>	12.00	12.00	53.00	110.0	4	64.50	11.50
<b>C49214.0</b>	14.00	12.00	53.00	110.0	4	64.50	11.50
<b>C49216.0</b>	16.00	16.00	63.00	123.0	4	74.50	15.50
<b>C49218.0</b>	18.00	16.00	63.00	123.0	4	74.50	15.50
<b>C49220.0</b>	20.00	20.00	75.00	141.0	4	90.50	19.50
<b>C49222.0</b>	22.00	20.00	75.00	141.0	4	90.50	19.50
<b>C49225.0</b>	25.00	25.00	90.00	166.0	6	109.50	24.50
<b>C49230.0</b>	30.00	25.00	90.00	166.0	6	109.50	24.50

# C948



## Multi-Flute HSS-E-PM Long Series Roughing End Mill, Alcrona Coating

Long cut length, 4 or 6 flute design with an NRA profile to break chips for efficient roughing of deep profiles. A 35° helix reduces vibration and improves performance in roughing operations. Neck recess on cutting diameter equal to 10 mm and above. Alcrona coating improves performance and extends tool life.

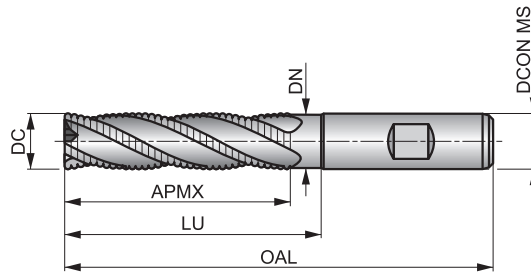

<b>HSS-E PM</b>	<b>NRA</b>	<b>NOF 4-6</b>
	$\lambda$ 35°	$\gamma$ 12°
<b>DIN 1835B</b>	<b>Alcrona</b>	<b>DC k12</b>
	<b>DIN 844L</b>	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P2.2</b> ■ 83 F	<b>P2.3</b> ■ 73 E	<b>P3.1</b> ■ 72 F	<b>P3.2</b> ■ 58 E	<b>P3.3</b> ■ 49 E	<b>P4.1</b> ■ 43 E	<b>P4.2</b> ■ 37 E	<b>P4.3</b> ■ 30 E	<b>M1.1</b> ■ 59 F	<b>M1.2</b> ■ 50 F	<b>M2.1</b> ■ 53 F	<b>M2.2</b> ■ 43 E	<b>M3.1</b> ■ 42 E	<b>M3.2</b> ■ 36 E
<b>M3.3</b> ■ 32 D	<b>M4.1</b> ■ 23 D	<b>K1.1</b> ■ 55 F	<b>K1.2</b> ■ 41 F	<b>K1.3</b> ■ 31 F	<b>K2.1</b> ■ 97 F	<b>K2.2</b> ■ 79 F	<b>K2.3</b> ■ 63 E	<b>K3.1</b> ■ 86 F	<b>K3.2</b> ■ 66 F	<b>K3.3</b> ■ 53 E	<b>K4.1</b> ■ 80 E	<b>K4.2</b> ■ 60 E	<b>K4.3</b> ■ 44 E
<b>K4.4</b> ■ 38 D	<b>K4.5</b> ■ 31 D	<b>K5.1</b> ■ 90 E	<b>K5.2</b> ■ 68 E	<b>K5.3</b> ■ 52 E	<b>N3.1</b> ■ 83 F	<b>N3.2</b> ■ 49 F	<b>S1.1</b> ■ 41 E	<b>S1.2</b> ■ 34 E	<b>S1.3</b> ■ 15 D	<b>S2.1</b> ■ 32 D	<b>S2.2</b> ■ 14 D	<b>S3.1</b> ■ 24 D	<b>S3.2</b> ■ 10 D
<b>S4.1</b> ■ 19 D	<b>S4.2</b> ■ 8 D												

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
<b>C9486.0</b>	6.00	6.00	24.00	68.0	4	–	–
<b>C9488.0</b>	8.00	10.00	38.00	88.0	4	–	–
<b>C94810.0</b>	10.00	10.00	45.00	95.0	4	54.50	9.50
<b>C94812.0</b>	12.00	12.00	53.00	110.0	4	64.50	11.50
<b>C94814.0</b>	14.00	12.00	53.00	110.0	4	64.50	11.50
<b>C94816.0</b>	16.00	16.00	63.00	123.0	4	74.50	15.50
<b>C94818.0</b>	18.00	16.00	63.00	123.0	4	74.50	15.50
<b>C94820.0</b>	20.00	20.00	75.00	141.0	4	90.50	19.50
<b>C94825.0</b>	25.00	25.00	90.00	166.0	6	109.50	24.50
<b>C94832.0</b>	32.00	32.00	106.00	186.0	6	125.50	31.50


Material code (BMC)	HSS-E PM	HSS-E PM	HSS-E PM	HSS-E PM	HSS-E PM	HSS-E PM								
Mill Profile	N	N	N	N	N	N								
Number of flutes (NOF)	NOF 3-4	NOF 3-6	NOF 4-6	NOF 4-5	NOF 4-6	NOF 4-6								
Cut length														
Flute Helix (FHA)	$\lambda$ 45°	$\lambda$ 45°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°								
Flute Helix (FHA)	$\lambda$ 45°	$\lambda$ 45°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°								
Radial rake angle (GAMF)	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°								
Shank	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835B	DIN 1835B								
Coating	Bright	Alcrona	Bright	TiCN	Bright	TiCN								
Cutting diameter tolerance class (TCDC)	DC k10	DC k10	DC k10	DC k10	DC k10	DC k10								
Direction														
Basic standard group (BSG)	DIN 844K	DIN 844K	DIN 844K	DIN 844K	DIN 844L	DIN 844L								
Product Family Code	<b>C299</b>	<b>C907</b>	<b>C247</b>	<b>C246</b>	<b>C273</b>	<b>C295</b>								
PSF cutting diameters range	3.00 – 20.00	3.00 – 32.00	2.00 – 40.00	2.00 – 25.00	2.00 – 40.00	2.00 – 40.00								
	36	37	38	40	41	43								
<b>P</b>	P1		■	■	■	■								
	P2	■	■	■	■	■								
	P3	■	■	▣	■	▣	■							
	P4	■	■	▣	▣	▣	▣							
<b>M</b>	M1	■	■	▣	▣	▣	▣							
	M2	■	■	▣	▣	▣	▣							
	M3	▣	■	■	▣	▣	▣							
	M4	■	■	▣	▣	▣	▣							
<b>K</b>	K1	■	■	▣	■	▣	■							
	K2	■	■	▣	■	▣	■							
	K3	■	■	▣	■	▣	■							
	K4	■	■	▣	■	▣	■							
	K5	■	■	▣	■	▣	■							
<b>N</b>	N1			▣	▣	▣	▣							
	N2			▣	▣	▣	▣							
	N3	■	■	■	■	■	■							
	N4			▣	▣	▣	▣							
	N5													
<b>S</b>	S1	■	■	▣	■	▣	■							
	S2	■	■	▣	▣	▣	▣							
	S3	■	■	▣	▣	▣	▣							
	S4	■	■	▣	▣	▣	▣							
<b>H</b>	H1													
	H2													
	H3													
	H4													

# C299



## 3-4 Flute HSS-E-PM End Mill, Bright Finish

Short cut length, 3 or 4 flute design provides high rigidity for general profile and ramp milling applications. With a 45° helix and designed for machining higher strength materials. Neck recess on cutting diameter equal to 10 mm and above.



HSS-E PM	N	NOF 3-4
	λ 45°	γ 12°
DIN 1835B	Bright	DC k10
	DIN 844K	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P2.2</b> ■ 37 D	<b>P2.3</b> ■ 33 C	<b>P3.1</b> ■ 32 D	<b>P3.2</b> ■ 26 C	<b>P3.3</b> ■ 22 C	<b>P4.1</b> ■ 19 C	<b>P4.2</b> ■ 16 C	<b>P4.3</b> ■ 13 C	<b>M1.1</b> ■ 36 D	<b>M1.2</b> ■ 30 D	<b>M2.1</b> ■ 32 D	<b>M2.2</b> ■ 26 C	<b>M3.1</b> ■ 24 C	<b>M3.2</b> ■ 21 C
<b>M3.3</b> ■ 19 B	<b>M4.1</b> ■ 13 B	<b>K1.1</b> ■ 30 D	<b>K1.2</b> ■ 22 D	<b>K1.3</b> ■ 17 D	<b>K2.1</b> ■ 55 D	<b>K2.2</b> ■ 45 D	<b>K2.3</b> ■ 36 C	<b>K3.1</b> ■ 49 D	<b>K3.2</b> ■ 37 D	<b>K3.3</b> ■ 30 B	<b>K4.1</b> ■ 45 C	<b>K4.2</b> ■ 34 C	<b>K4.3</b> ■ 25 C
<b>K4.4</b> ■ 22 B	<b>K4.5</b> ■ 18 B	<b>K5.1</b> ■ 51 C	<b>K5.2</b> ■ 39 C	<b>K5.3</b> ■ 30 C	<b>N3.1</b> ■ 43 D	<b>N3.2</b> ■ 25 D	<b>S1.1</b> ■ 29 C	<b>S1.2</b> ■ 57 C	<b>S1.3</b> ■ 10 B	<b>S2.1</b> ■ 17 B	<b>S2.2</b> ■ 7 B	<b>S3.1</b> ■ 13 B	<b>S3.2</b> ■ 5 B
<b>S4.1</b> ■ 10 B	<b>S4.2</b> ■ 4 B												

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C2993.0	3.00	6.00	8.00	52.0	3	–	–
C2994.0	4.00	6.00	11.00	55.0	3	–	–
C2995.0	5.00	6.00	13.00	57.0	3	–	–
C2996.0	6.00	6.00	13.00	57.0	3	–	–
C2998.0	8.00	10.00	19.00	69.0	4	–	–
C29910.0	10.00	10.00	22.00	72.0	4	31.50	9.50
C29912.0	12.00	12.00	26.00	83.0	4	37.50	11.50
C29914.0	14.00	12.00	26.00	83.0	4	37.50	11.50
C29916.0	16.00	16.00	32.00	92.0	4	43.50	15.50
C29920.0	20.00	20.00	38.00	104.0	4	53.50	19.50


# C907



## Multi-Flute HSS-E-PM End Mill, Alcrona Coating

Short cut length, 3, 4, 5 or 6 flute design provides high rigidity for general profile and ramp milling applications. With a 45° helix and designed for machining higher strength materials. Neck recess on cutting diameter equal to 10 mm and above. Alcrona coating improves performance and extends the tool life.

HSS-E PM	N	NOF 3-6
	λ 45°	γ 12°
DIN 1835B	Alcrona	DC k10
	DIN 844K	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P2.2</b> ■ 95 D	<b>P2.3</b> ■ 84 C	<b>P3.1</b> ■ 81 D	<b>P3.2</b> ■ 65 C	<b>P3.3</b> ■ 55 C	<b>P4.1</b> ■ 48 C	<b>P4.2</b> ■ 41 C	<b>P4.3</b> ■ 34 C	<b>M1.1</b> ■ 69 D	<b>M1.2</b> ■ 58 D	<b>M2.1</b> ■ 61 D	<b>M2.2</b> ■ 50 C	<b>M3.1</b> ■ 47 C	<b>M3.2</b> ■ 40 C
<b>M3.3</b> ■ 36 B	<b>M4.1</b> ■ 25 B	<b>K1.1</b> ■ 60 D	<b>K1.2</b> ■ 44 D	<b>K1.3</b> ■ 33 D	<b>K2.1</b> ■ 111 D	<b>K2.2</b> ■ 90 D	<b>K2.3</b> ■ 72 C	<b>K3.1</b> ■ 98 D	<b>K3.2</b> ■ 75 D	<b>K3.3</b> ■ 61 B	<b>K4.1</b> ■ 91 C	<b>K4.2</b> ■ 68 C	<b>K4.3</b> ■ 50 C
<b>K4.4</b> ■ 43 B	<b>K4.5</b> ■ 36 B	<b>K5.1</b> ■ 103 C	<b>K5.2</b> ■ 77 C	<b>K5.3</b> ■ 60 C	<b>N3.1</b> ■ 93 D	<b>N3.2</b> ■ 55 D	<b>S1.1</b> ■ 45 C	<b>S1.2</b> ■ 85 C	<b>S1.3</b> ■ 15 B	<b>S2.1</b> ■ 33 B	<b>S2.2</b> ■ 14 B	<b>S3.1</b> ■ 25 B	<b>S3.2</b> ■ 10 B
<b>S4.1</b> ■ 20 B	<b>S4.2</b> ■ 8 B												

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C9073.0	3.00	6.00	8.00	52.0	3	–	–
C9074.0	4.00	6.00	11.00	55.0	3	–	–
C9075.0	5.00	6.00	13.00	57.0	3	–	–
C9076.0	6.00	6.00	13.00	57.0	3	–	–
C9078.0	8.00	10.00	19.00	69.0	4	–	–
C90710.0	10.00	10.00	22.00	72.0	4	31.50	9.50
C90712.0	12.00	12.00	26.00	83.0	4	37.50	11.50
C90714.0	14.00	12.00	26.00	83.0	4	37.50	11.50
C90716.0	16.00	16.00	32.00	92.0	4	43.50	15.50
C90718.0	18.00	16.00	32.00	92.0	4	43.50	15.50
C90720.0	20.00	20.00	38.00	104.0	4	53.50	19.50
C90722.0	22.00	20.00	38.00	104.0	5	53.50	19.50
C90725.0	25.00	25.00	45.00	121.0	5	64.50	24.50
C90728.0	28.00	25.00	45.00	121.0	6	64.50	24.50
C90730.0	30.00	25.00	45.00	121.0	6	64.50	24.50
C90732.0	32.00	32.00	53.00	133.0	6	72.50	31.50


# C247



## Multi-Flute HSS-E-PM End Mill, Brigh Finish

Short cut length, 4, 5 or 6 flute design provides high rigidity for general profile and ramp milling applications in mild steels and non-ferrous materials.

<b>HSS-E PM</b>	<b>N</b>	
	$\lambda$ <b>30°</b>	$\gamma$ <b>12°</b>
	Bright	DC <b>k10</b>
	<b>DIN 844K</b>	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 53 D	<b>P1.2</b> ■ 59 D	<b>P1.3</b> ■ 61 D	<b>P2.1</b> ■ 45 D	<b>P2.2</b> ■ 40 D	<b>P3.1</b> ▣ 36 D	<b>P3.2</b> ▣ 29 C	<b>P4.1</b> ▣ 22 C	<b>M1.1</b> ▣ 34 D	<b>M1.2</b> ▣ 29 D	<b>M2.1</b> ▣ 31 D	<b>M2.2</b> ▣ 25 C	<b>K1.1</b> ▣ 30 D	<b>K1.2</b> ▣ 22 D
<b>K1.3</b> ▣ 17 D	<b>K2.1</b> ▣ 55 D	<b>K2.2</b> ▣ 45 D	<b>K2.3</b> ▣ 36 C	<b>K3.1</b> ▣ 49 D	<b>K3.2</b> ▣ 37 D	<b>K3.3</b> ▣ 30 B	<b>K4.1</b> ▣ 45 C	<b>K4.2</b> ▣ 34 C	<b>K4.3</b> ▣ 25 C	<b>K4.4</b> ▣ 22 B	<b>K4.5</b> ▣ 18 B	<b>K5.1</b> ▣ 51 C	<b>K5.2</b> ▣ 39 C
<b>K5.3</b> ▣ 30 C	<b>N1.1</b> ▣ 95 F	<b>N1.2</b> ▣ 71 E	<b>N1.3</b> ▣ 48 E	<b>N2.1</b> ▣ 48 D	<b>N2.2</b> ▣ 43 D	<b>N2.3</b> ▣ 31 D	<b>N3.1</b> ■ 50 D	<b>N3.2</b> ■ 29 D	<b>N3.3</b> ■ 15 D	<b>N4.1</b> ▣ 50 D	<b>S1.1</b> ■ 30 C	<b>S1.2</b> ▣ 25 C	<b>S2.1</b> ▣ 20 B
<b>S3.1</b> ▣ 15 B	<b>S4.1</b> ▣ 12 B												

DCON MS tolerance h6.

Product	DC (inch)	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C2472.0	–	2.00	6.00	7.00	51.0	4	–	–
C2472.5	–	2.50	6.00	8.00	52.0	4	–	–
C2473.0	–	3.00	6.00	8.00	52.0	4	–	–
C2471/8 <sup>2)</sup>	1/8	3.18	6.00	10.00	54.0	4	–	–
C2473.5	–	3.50	6.00	10.00	54.0	4	–	–
C2474.0	–	4.00	6.00	11.00	55.0	4	–	–
C2474.5	–	4.50	6.00	11.00	55.0	4	–	–
C2473/16 <sup>2)</sup>	3/16	4.76	6.00	13.00	57.0	4	–	–
C2475.0	–	5.00	6.00	13.00	57.0	4	–	–
C2475.5	–	5.50	6.00	13.00	57.0	4	–	–
C2476.0	–	6.00	6.00	13.00	57.0	4	–	–
C2471/4 <sup>2)</sup>	1/4	6.35	10.00	16.00	66.0	4	–	–
C2476.5	–	6.50	10.00	16.00	66.0	4	–	–
C2477.0	–	7.00	10.00	16.00	66.0	4	–	–
C2477.5	–	7.50	10.00	16.00	66.0	4	–	–
C2475/16 <sup>2)</sup>	5/16	7.94	10.00	19.00	69.0	4	–	–
C2478.0	–	8.00	10.00	19.00	69.0	4	–	–
C2478.5	–	8.50	10.00	19.00	69.0	4	–	–
C2479.0	–	9.00	10.00	19.00	69.0	4	–	–
C2479.5	–	9.50	10.00	19.00	69.0	4	–	–
C2473/8 <sup>2)</sup>	3/8	9.52	10.00	22.00	72.0	4	31.50	9.50
C24710.0	–	10.00	10.00	22.00	72.0	4	31.50	9.50
C24711.0	–	11.00	12.00	22.00	79.0	4	–	–
C24712.0	–	12.00	12.00	26.00	83.0	4	37.50	11.50
C2471/2 <sup>2)</sup>	1/2	12.70	12.00	26.00	83.0	4	37.50	11.50

Product	DC	DC	DCON MS	APMX	OAL	NOF	LU	DN
	(inch)	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)
<b>C24713.0</b>	–	13.00	12.00	26.00	83.0	4	37.50	11.50
<b>C24714.0</b>	–	14.00	12.00	26.00	83.0	4	37.50	11.50
<b>C2479/16<sup>2)</sup></b>	9/16	14.29	12.00	26.00	83.0	4	37.50	11.50
<b>C24715.0</b>	–	15.00	12.00	26.00	83.0	4	37.50	11.50
<b>C2475/8<sup>2)</sup></b>	5/8	15.88	16.00	32.00	92.0	4	43.50	15.50
<b>C24716.0</b>	–	16.00	16.00	32.00	92.0	4	43.50	15.50
<b>C24717.0</b>	–	17.00	16.00	32.00	92.0	4	43.50	15.50
<b>C24718.0</b>	–	18.00	16.00	32.00	92.0	4	43.50	15.50
<b>C24719.0</b>	–	19.00	16.00	32.00	92.0	4	43.50	15.50
<b>C2473/4<sup>2)</sup></b>	3/4	19.05	20.00	38.00	104.0	4	53.50	18.50
<b>C24720.0</b>	–	20.00	20.00	38.00	104.0	4	53.50	19.50
<b>C24721.0</b>	–	21.00	20.00	38.00	104.0	4	53.50	19.50
<b>C24722.0</b>	–	22.00	20.00	38.00	104.0	5	53.50	19.50
<b>C2477/8<sup>2)</sup></b>	7/8	22.22	20.00	38.00	104.0	5	53.50	19.50
<b>C24723.0</b>	–	23.00	20.00	38.00	104.0	5	53.50	19.50
<b>C24724.0</b>	–	24.00	25.00	45.00	121.0	5	64.50	23.50
<b>C24725.0</b>	–	25.00	25.00	45.00	121.0	5	64.50	24.50
<b>C2471<sup>2)</sup></b>	1"	25.40	25.00	45.00	121.0	5	64.50	24.50
<b>C24726.0</b>	–	26.00	25.00	45.00	121.0	6	64.50	24.50
<b>C24728.0</b>	–	28.00	25.00	45.00	121.0	6	64.50	24.50
<b>C24730.0</b>	–	30.00	25.00	45.00	121.0	6	64.50	24.50
<b>C24732.0</b>	–	32.00	32.00	53.00	133.0	6	72.50	31.50
<b>C24736.0<sup>1)</sup></b>	–	36.00	32.00	53.00	133.0	6	72.50	31.50
<b>C24740.0<sup>1)</sup></b>	–	40.00	40.00	63.00	155.0	6	84.50	39.00

<sup>1)</sup> Available in HSS-E only; no centre cutting.


<sup>2)</sup> DC tolerance +0.0025 inches / -0.0005 inches.

# C246



## Multi-Flute HSS-E-PM End Mill, TiCN Coating

Short cut length, 4 or 5 flute design provides high rigidity for general profile and ramp milling applications. TiCN coating increases the life of the cutter and improves performance when milling hard and abrasive materials.



<b>HSS-E PM</b>	<b>N</b>	<b>NOF 4-5</b>
	$\lambda$ <b>30°</b>	$\gamma$ <b>12°</b>
		<b>DC k10</b>
	<b>DIN 844K</b>	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 113 D	<b>P1.2</b> ■ 126 D	<b>P1.3</b> ■ 131 D	<b>P2.1</b> ■ 97 D	<b>P2.2</b> ■ 85 D	<b>P2.3</b> ▣ 75 C	<b>P3.1</b> ■ 74 D	<b>P3.2</b> ■ 59 C	<b>P3.3</b> ▣ 50 C	<b>P4.1</b> ■ 44 C	<b>P4.2</b> ▣ 37 C	<b>P4.3</b> ▣ 31 C	<b>M1.1</b> ▣ 62 D	<b>M1.2</b> ▣ 52 D
<b>M2.1</b> ▣ 55 D	<b>M2.2</b> ▣ 45 C	<b>M3.3</b> ▣ 26 B	<b>M4.1</b> ▣ 25 B	<b>K1.1</b> ■ 55 D	<b>K1.2</b> ■ 41 D	<b>K1.3</b> ■ 31 D	<b>K2.1</b> ■ 97 D	<b>K2.2</b> ■ 79 D	<b>K2.3</b> ■ 63 C	<b>K3.1</b> ■ 86 D	<b>K3.2</b> ■ 66 D	<b>K3.3</b> ■ 53 B	<b>K4.1</b> ■ 80 C
<b>K4.2</b> ■ 60 C	<b>K4.3</b> ■ 44 C	<b>K4.4</b> ■ 38 B	<b>K4.5</b> ■ 31 B	<b>K5.1</b> ■ 90 C	<b>K5.2</b> ■ 68 C	<b>K5.3</b> ■ 52 C	<b>N1.1</b> ▣ 159 F	<b>N1.2</b> ▣ 120 E	<b>N1.3</b> ▣ 80 E	<b>N2.1</b> ▣ 80 D	<b>N2.2</b> ■ 72 D	<b>N2.3</b> ■ 51 D	<b>N3.1</b> ■ 84 D
<b>N3.2</b> ■ 50 D	<b>N3.3</b> ■ 25 D	<b>N4.1</b> ▣ 84 D	<b>S1.1</b> ■ 43 C	<b>S1.2</b> ■ 35 C	<b>S1.3</b> ▣ 15 B	<b>S2.1</b> ■ 32 B	<b>S2.2</b> ▣ 14 B	<b>S3.1</b> ■ 24 B	<b>S3.2</b> ▣ 10 B	<b>S4.1</b> ■ 19 B	<b>S4.2</b> ▣ 8 B		

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C2462.0	2.00	6.00	7.00	51.0	4	–	–
C2463.0	3.00	6.00	8.00	52.0	4	–	–
C2464.0	4.00	6.00	11.00	55.0	4	–	–
C2465.0	5.00	6.00	13.00	57.0	4	–	–
C2466.0	6.00	6.00	13.00	57.0	4	–	–
C2467.0	7.00	10.00	16.00	66.0	4	–	–
C2468.0	8.00	10.00	19.00	69.0	4	–	–
C24610.0	10.00	10.00	22.00	72.0	4	31.50	9.50
C24611.0	11.00	12.00	22.00	79.0	4	–	–
C24612.0	12.00	12.00	26.00	83.0	4	37.50	11.50
C24613.0	13.00	12.00	26.00	83.0	4	37.50	11.50
C24614.0	14.00	12.00	26.00	83.0	4	37.50	11.50
C24615.0	15.00	12.00	26.00	83.0	4	37.50	11.50
C24616.0	16.00	16.00	32.00	92.0	4	43.50	15.50
C24618.0	18.00	16.00	32.00	92.0	4	43.50	15.50
C24620.0	20.00	20.00	38.00	104.0	4	53.50	19.50
C24622.0	22.00	20.00	38.00	104.0	5	53.50	19.50
C24625.0	25.00	25.00	45.00	121.0	5	64.50	24.50

# C273




## Multi-Flute HSS-E-PM Long Series End Mill, Bright Finish

Long cut length, 4, 5 or 6 flute design provides high rigidity for finishing deep profiles in mild steels and non-ferrous materials, such as aluminium and medium strength titanium alloys.

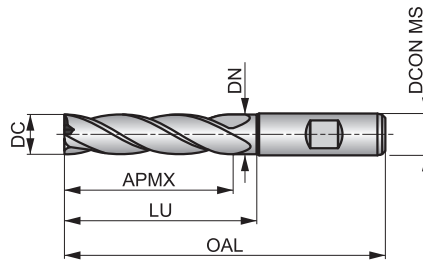

<b>HSS-E PM</b>	<b>N</b>	<b>NOF 4-6</b>
	$\lambda$ <b>30°</b>	$\gamma$ <b>12°</b>
<b>DIN 1835B</b>	Bright	<b>DC k10</b>
	<b>DIN 844L</b>	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 46 C	<b>P1.2</b> ■ 52 C	<b>P1.3</b> ■ 54 C	<b>P2.1</b> ■ 40 C	<b>P2.2</b> ■ 35 C	<b>P3.1</b> ▣ 32 C	<b>P3.2</b> ▣ 26 B	<b>P4.1</b> ▣ 19 B	<b>M1.1</b> ▣ 14 C	<b>M1.2</b> ▣ 12 C	<b>M2.1</b> ▣ 12 C	<b>M2.2</b> ▣ 10 B	<b>K1.1</b> ▣ 25 C	<b>K1.2</b> ▣ 19 C
<b>K1.3</b> ▣ 14 C	<b>K2.1</b> ▣ 49 C	<b>K2.2</b> ▣ 40 C	<b>K2.3</b> ▣ 32 B	<b>K3.1</b> ▣ 44 C	<b>K3.2</b> ▣ 33 C	<b>K3.3</b> ▣ 27 A	<b>K4.1</b> ▣ 40 B	<b>K4.2</b> ▣ 30 B	<b>K4.3</b> ▣ 22 B	<b>K4.4</b> ▣ 19 A	<b>K4.5</b> ▣ 16 A	<b>K5.1</b> ▣ 46 B	<b>K5.2</b> ▣ 34 B
<b>K5.3</b> ▣ 27 B	<b>N1.1</b> ▣ 81 E	<b>N1.2</b> ▣ 60 D	<b>N1.3</b> ▣ 41 D	<b>N2.1</b> ▣ 41 C	<b>N2.2</b> ▣ 37 C	<b>N2.3</b> ▣ 26 C	<b>N3.1</b> ■ 43 C	<b>N3.2</b> ■ 25 C	<b>N3.3</b> ■ 13 C	<b>N4.1</b> ▣ 43 C	<b>S1.1</b> ■ 25 B	<b>S1.2</b> ▣ 20 B	<b>S2.1</b> ▣ 13 A
<b>S3.1</b> ▣ 10 A	<b>S4.1</b> ▣ 8 A												

DCON MS tolerance h6.

Product	DC (inch)	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C2732.0	—	2.00	6.00	10.00	54.0	4	—	—
C2732.5	—	2.50	6.00	12.00	56.0	4	—	—
C2733.0	—	3.00	6.00	12.00	56.0	4	—	—
C2731/8 <sup>2)</sup>	1/8	3.18	6.00	15.00	59.0	4	—	—
C2733.5	—	3.50	6.00	15.00	59.0	4	—	—
C2734.0	—	4.00	6.00	19.00	63.0	4	—	—
C2734.5	—	4.50	6.00	19.00	63.0	4	—	—
C2733/16 <sup>2)</sup>	3/16	4.76	6.00	24.00	68.0	4	—	—
C2735.0	—	5.00	6.00	24.00	68.0	4	—	—
C2735.5	—	5.50	6.00	24.00	68.0	4	—	—
C2736.0	—	6.00	6.00	24.00	68.0	4	—	—
C2731/4 <sup>2)</sup>	1/4	6.35	10.00	30.00	80.0	4	—	—
C2737.0	—	7.00	10.00	30.00	80.0	4	—	—
C2738.0	—	8.00	10.00	38.00	88.0	4	—	—
C2739.0	—	9.00	10.00	38.00	88.0	4	—	—
C2733/8 <sup>2)</sup>	3/8	9.52	10.00	45.00	95.0	4	54.50	9.50
C27310.0	—	10.00	10.00	45.00	95.0	4	54.50	9.50
C27311.0	—	11.00	12.00	45.00	102.0	4	—	—
C27312.0	—	12.00	12.00	53.00	110.0	4	64.50	11.50
C2731/2 <sup>2)</sup>	1/2	12.70	12.00	53.00	110.0	4	64.50	11.50
C27313.0	—	13.00	12.00	53.00	110.0	4	64.50	11.50
C27314.0	—	14.00	12.00	53.00	110.0	4	64.50	11.50
C27315.0	—	15.00	12.00	53.00	110.0	4	64.50	11.50
C2735/8 <sup>2)</sup>	5/8	15.88	16.00	63.00	123.0	4	74.50	15.50
C27316.0	—	16.00	16.00	63.00	123.0	4	74.50	15.50

Product	DC	DC	DCON MS	APMX	OAL	NOF	LU	DN
	(inch)	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)
<b>C27318.0</b>	–	18.00	16.00	63.00	123.0	4	74.50	15.50
<b>C2733/4</b> <sup>2)</sup>	3/4	19.05	20.00	75.00	141.0	4	90.50	18.50
<b>C27320.0</b>	–	20.00	20.00	75.00	141.0	4	90.50	19.50
<b>C27322.0</b>	–	22.00	20.00	75.00	141.0	5	90.50	19.50
<b>C27325.0</b>	–	25.00	25.00	90.00	166.0	5	109.50	24.50
<b>C2731</b> <sup>2)</sup>	1"	25.40	25.00	90.00	166.0	5	109.50	24.50
<b>C27330.0</b>	–	30.00	25.00	90.00	166.0	6	109.50	24.50
<b>C27332.0</b>	–	32.00	32.00	106.00	186.0	6	125.50	31.50
<b>C27340.0</b> <sup>1)</sup>	–	40.00	40.00	125.00	217.0	6	146.50	39.00

<sup>1)</sup> Available in HSS-E only; no centre cutting.


<sup>2)</sup> DC tolerance +0.0025 inches / -0.0005 inches.

# C295



## Multi-Flute HSS-E-PM Long Series End Mill, TiCN Coating

Long cut length, 4, 5 or 6 flute design provides high rigidity for finishing deep profiles. TiCN coating increases the life of the cutter and improves performance when milling hard and abrasive materials.

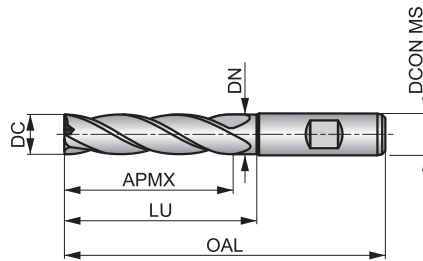

HSS-E PM	N	NOF 4-6
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835B	TiCN	DC k10
	DIN 844L	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 99 C	<b>P1.2</b> ■ 111 C	<b>P1.3</b> ■ 115 C	<b>P2.1</b> ■ 85 C	<b>P2.2</b> ■ 75 C	<b>P2.3</b> ▣ 66 B	<b>P3.1</b> ■ 66 C	<b>P3.2</b> ■ 53 B	<b>P3.3</b> ▣ 45 B	<b>P4.1</b> ■ 40 B	<b>P4.2</b> ▣ 34 B	<b>P4.3</b> ▣ 27 B	<b>M1.1</b> ▣ 55 C	<b>M1.2</b> ▣ 46 C
<b>M2.1</b> ▣ 49 C	<b>M2.2</b> ▣ 40 B	<b>M3.3</b> ▣ 21 A	<b>M4.1</b> ▣ 20 A	<b>K1.1</b> ■ 50 C	<b>K1.2</b> ■ 37 C	<b>K1.3</b> ■ 28 C	<b>K2.1</b> ■ 86 C	<b>K2.2</b> ■ 70 C	<b>K2.3</b> ■ 56 B	<b>K3.1</b> ■ 76 C	<b>K3.2</b> ■ 58 C	<b>K3.3</b> ■ 47 A	<b>K4.1</b> ■ 71 B
<b>K4.2</b> ■ 53 B	<b>K4.3</b> ■ 39 B	<b>K4.4</b> ■ 33 A	<b>K4.5</b> ■ 28 A	<b>K5.1</b> ■ 80 B	<b>K5.2</b> ■ 60 B	<b>K5.3</b> ■ 46 B	<b>N1.1</b> ▣ 139 E	<b>N1.2</b> ▣ 105 D	<b>N1.3</b> ▣ 70 D	<b>N2.1</b> ▣ 70 C	<b>N2.2</b> ■ 63 C	<b>N2.3</b> ■ 45 C	<b>N3.1</b> ■ 73 C
<b>N3.2</b> ■ 43 C	<b>N3.3</b> ■ 22 C	<b>N4.1</b> ▣ 73 C	<b>S1.1</b> ■ 40 B	<b>S1.2</b> ■ 30 B	<b>S1.3</b> ▣ 15 A	<b>S2.1</b> ■ 27 A	<b>S2.2</b> ▣ 14 A	<b>S3.1</b> ■ 20 A	<b>S3.2</b> ▣ 10 A	<b>S4.1</b> ■ 16 A	<b>S4.2</b> ▣ 8 A		

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C2952.0	2.00	6.00	10.00	54.0	4	–	–
C2953.0	3.00	6.00	12.00	56.0	4	–	–
C2954.0	4.00	6.00	19.00	63.0	4	–	–
C2955.0	5.00	6.00	24.00	68.0	4	–	–
C2956.0	6.00	6.00	24.00	68.0	4	–	–
C2957.0	7.00	10.00	30.00	80.0	4	–	–
C2958.0	8.00	10.00	38.00	88.0	4	–	–
C2959.0	9.00	10.00	38.00	88.0	4	–	–
C29510.0	10.00	10.00	45.00	95.0	4	54.50	9.50
C29512.0	12.00	12.00	53.00	110.0	4	64.50	11.50
C29515.0	15.00	12.00	53.00	110.0	4	64.50	11.50
C29516.0	16.00	16.00	63.00	123.0	4	74.50	15.50
C29518.0	18.00	16.00	63.00	123.0	4	74.50	15.50
C29520.0	20.00	20.00	75.00	141.0	4	90.50	19.50
C29525.0	25.00	25.00	90.00	166.0	5	109.50	24.50
C29530.0	30.00	25.00	90.00	166.0	6	109.50	24.50
C29532.0	32.00	32.00	106.00	186.0	6	125.50	31.50
C29540.0 <sup>1)</sup>	40.00	40.00	125.00	217.0	6	146.50	39.00

<sup>1)</sup> Available in HSS-E only; no centre cutting.

Material code (BMC)	HSS-E PM	HSS-E	HSS-E																	
Mill Profile	N	N	N																	
Number of flutes (NOF)	NOF 3-5	NOF 2	NOF 2																	
Cut length																				
Flute Helix (FHA)	$\lambda$ 45°	$\lambda$ 30°	$\lambda$ 30°																	
Flute Helix (FHA)	$\lambda$ 45°	$\lambda$ 30°	$\lambda$ 30°																	
Radial rake angle (GAMF)	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°																	
Shank	DIN 18358	DIN 18358	DIN 18358																	
Coating	Alcrona	Bright	Bright																	
Cutting diameter tolerance class (TCDC)	DC k10	DC e8	DC e8																	
Direction																				
Basic standard group (BSG)	DIN 844L	DIN 327D	DIN 844K																	

Product Family Code	<b>C920</b>	<b>C500</b>	<b>C505</b>																	
PSF cutting diameters range	6.00 – 25.00	2.00 – 20.00	3.00 – 30.00																	


		46	47	48																
<b>P</b>	P1		■	■																
	P2	■	■	■																
	P3	■	■	■																
	P4	■	■	■																
<b>M</b>	M1	■	■	■																
	M2	■	■	■																
	M3	■	■	■																
	M4	■	■	■																
<b>K</b>	K1	■	■	■																
	K2	■	■	■																
	K3	■	■	■																
	K4	■	■	■																
	K5	■	■	■																
<b>N</b>	N1		■	■																
	N2		■	■																
	N3	■	■	■																
	N4		■	■																
	N5																			
<b>S</b>	S1	■	■	■																
	S2	■	■	■																
	S3	■	■	■																
	S4	■	■	■																
<b>H</b>	H1																			
	H2																			
	H3																			
	H4																			

# C920



## Multi-Flute HSS-E-PM Long Series End Mill, Alcrona Coating

Long cut length, 3, 4 or 5 flute design for high rigidity finishing deep profiles. With a 45° helix and designed for machining higher strength materials. Neck recess on cutting diameter equal to 10 mm and above to avoid work contact with the wall and extend reach. Alcrona coating extends the tool life.

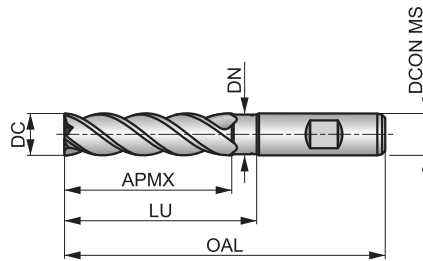

HSS-E PM	N	NOF 3-5
	$\lambda$ 45°	$\gamma$ 12°
DIN 1835B	Alcrona	DC k10
	DIN 844L	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P2.2</b> ■ 85 C	<b>P2.3</b> ■ 75 B	<b>P3.1</b> ■ 74 C	<b>P3.2</b> ■ 59 B	<b>P3.3</b> ■ 50 B	<b>P4.1</b> ■ 44 B	<b>P4.2</b> ■ 37 B	<b>P4.3</b> ■ 31 B	<b>M1.1</b> ■ 62 C	<b>M1.2</b> ■ 52 C	<b>M2.1</b> ■ 55 C	<b>M2.2</b> ■ 45 B	<b>M3.1</b> ■ 41 B	<b>M3.2</b> ■ 35 B
<b>M3.3</b> ■ 32 A	<b>M4.1</b> ■ 25 A	<b>K1.1</b> ■ 55 C	<b>K1.2</b> ■ 41 C	<b>K1.3</b> ■ 31 C	<b>K2.1</b> ■ 98 C	<b>K2.2</b> ■ 80 C	<b>K2.3</b> ■ 64 B	<b>K3.1</b> ■ 87 C	<b>K3.2</b> ■ 67 C	<b>K3.3</b> ■ 54 A	<b>K4.1</b> ■ 81 B	<b>K4.2</b> ■ 61 B	<b>K4.3</b> ■ 45 B
<b>K4.4</b> ■ 38 A	<b>K4.5</b> ■ 32 A	<b>K5.1</b> ■ 91 B	<b>K5.2</b> ■ 69 B	<b>K5.3</b> ■ 53 B	<b>N3.1</b> ■ 83 C	<b>N3.2</b> ■ 49 C	<b>S1.1</b> ■ 40 B	<b>S1.2</b> ■ 35 B	<b>S1.3</b> ■ 15 A	<b>S2.1</b> ■ 33 A	<b>S2.2</b> ■ 14 A	<b>S3.1</b> ■ 25 A	<b>S3.2</b> ■ 10 A
<b>S4.1</b> ■ 20 A	<b>S4.2</b> ■ 8 A												

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
<b>C9206.0</b>	6.00	6.00	24.00	68.0	3	–	–
<b>C9208.0</b>	8.00	10.00	38.00	88.0	4	–	–
<b>C92010.0</b>	10.00	10.00	45.00	95.0	4	54.50	9.50
<b>C92012.0</b>	12.00	12.00	53.00	110.0	4	64.50	11.50
<b>C92014.0</b>	14.00	12.00	53.00	110.0	4	64.50	11.50
<b>C92016.0</b>	16.00	16.00	63.00	123.0	4	74.50	15.50
<b>C92020.0</b>	20.00	20.00	75.00	141.0	4	90.50	19.50
<b>C92025.0</b>	25.00	25.00	90.00	166.0	5	109.50	24.50


# C500



## 2-Flute HSS-E Ball-Nosed End Mill, Bright Finish

Extra short cut length, 2-flute design provides high rigidity for increased strength and reduced vibrations. Geometry designed for contouring complex surfaces on CNC m/c, suited for mild steels, mild non-ferrous materials and medium strength titanium alloys. Neck recess on cutting diameter equal to 14 mm and above.

HSS-E	N	NOF 2
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835B	Bright	DC e8
	DIN 327D	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 53 E	<b>P1.2</b> ■ 59 E	<b>P1.3</b> ■ 61 E	<b>P2.1</b> ■ 45 E	<b>P2.2</b> ▣ 40 E	<b>P3.1</b> ▣ 36 E	<b>P3.2</b> ▣ 29 D	<b>P4.1</b> ▣ 22 D	<b>M1.1</b> ▣ 34 E	<b>M1.2</b> ▣ 29 E	<b>M2.1</b> ▣ 31 E	<b>M2.2</b> ▣ 25 D	<b>K1.1</b> ▣ 30 E	<b>K1.2</b> ▣ 22 E
<b>K1.3</b> ▣ 17 E	<b>K2.1</b> ▣ 55 E	<b>K2.2</b> ▣ 45 E	<b>K2.3</b> ▣ 36 D	<b>K3.1</b> ▣ 49 E	<b>K3.2</b> ▣ 37 E	<b>K3.3</b> ▣ 30 D	<b>K4.1</b> ▣ 45 D	<b>K4.2</b> ▣ 34 D	<b>K4.3</b> ▣ 25 D	<b>K4.4</b> ▣ 22 C	<b>K4.5</b> ▣ 18 C	<b>K5.1</b> ▣ 51 D	<b>K5.2</b> ▣ 39 D
<b>K5.3</b> ▣ 30 D	<b>N1.1</b> ▣ 95 G	<b>N1.2</b> ▣ 71 F	<b>N1.3</b> ▣ 48 F	<b>N2.1</b> ▣ 48 E	<b>N2.2</b> ▣ 43 E	<b>N2.3</b> ▣ 31 E	<b>N3.1</b> ■ 50 E	<b>N3.2</b> ■ 29 E	<b>N3.3</b> ■ 15 E	<b>N4.1</b> ▣ 50 E	<b>S1.1</b> ■ 30 D	<b>S1.2</b> ▣ 25 D	<b>S2.1</b> ▣ 20 C
<b>S3.1</b> ▣ 15 C	<b>S4.1</b> ▣ 12 C												

DCON MS tolerance h6; RE ±0.05 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C5002.0	2.00	1.00	6.00	4.00	48.0	2	–	–
C5003.0	3.00	1.50	6.00	5.00	49.0	2	–	–
C5004.0	4.00	2.00	6.00	7.00	51.0	2	–	–
C5005.0	5.00	2.50	6.00	8.00	52.0	2	–	–
C5006.0	6.00	3.00	6.00	8.00	52.0	2	–	–
C5007.0	7.00	3.50	10.00	10.00	60.0	2	–	–
C5008.0	8.00	4.00	10.00	11.00	61.0	2	–	–
C50010.0	10.00	5.00	10.00	13.00	63.0	2	–	–
C50012.0	12.00	6.00	12.00	16.00	73.0	2	–	–
C50014.0	14.00	7.00	12.00	16.00	73.0	2	27.50	11.50
C50015.0	15.00	7.50	12.00	16.00	73.0	2	27.50	11.50
C50016.0	16.00	8.00	16.00	19.00	79.0	2	30.50	15.50
C50018.0	18.00	9.00	16.00	19.00	79.0	2	30.50	15.50
C50020.0	20.00	10.00	20.00	22.00	88.0	2	37.50	19.50

# C505



## 2-Flute HSS-E Ball-Nosed End Mill, Bright Finish

Short cut length, 2-flute design provides high rigidity for increased strength and reduced vibrations. Geometry designed for contouring complex surfaces on CNC machines, suited for mild steels, mild non-ferrous materials and medium strength titanium alloys. Neck recess on cutting diameter equal to 14 mm and above.



HSS-E	N	NOF 2
	$\lambda$ 30°	$\gamma$ 12°
DIN 1835B	Bright	DC e8
	DIN 844K	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 46 D	<b>P1.2</b> ■ 52 D	<b>P1.3</b> ■ 54 D	<b>P2.1</b> ■ 40 D	<b>P2.2</b> ■ 35 D	<b>P3.1</b> ■ 32 D	<b>P3.2</b> ■ 26 C	<b>P4.1</b> ■ 19 C	<b>M1.1</b> ■ 34 D	<b>M1.2</b> ■ 29 D	<b>M2.1</b> ■ 31 D	<b>M2.2</b> ■ 25 C	<b>K1.1</b> ■ 30 D	<b>K1.2</b> ■ 22 D
<b>K1.3</b> ■ 17 D	<b>K2.1</b> ■ 49 D	<b>K2.2</b> ■ 40 D	<b>K2.3</b> ■ 32 C	<b>K3.1</b> ■ 44 D	<b>K3.2</b> ■ 33 D	<b>K3.3</b> ■ 27 B	<b>K4.1</b> ■ 40 C	<b>K4.2</b> ■ 30 C	<b>K4.3</b> ■ 22 C	<b>K4.4</b> ■ 19 B	<b>K4.5</b> ■ 16 B	<b>K5.1</b> ■ 46 C	<b>K5.2</b> ■ 34 C
<b>K5.3</b> ■ 27 C	<b>N1.1</b> ■ 81 F	<b>N1.2</b> ■ 60 E	<b>N1.3</b> ■ 41 E	<b>N2.1</b> ■ 41 D	<b>N2.2</b> ■ 37 D	<b>N2.3</b> ■ 26 D	<b>N3.1</b> ■ 43 D	<b>N3.2</b> ■ 25 D	<b>N3.3</b> ■ 13 D	<b>N4.1</b> ■ 43 D	<b>S1.1</b> ■ 30 C	<b>S1.2</b> ■ 25 C	<b>S2.1</b> ■ 20 B
<b>S3.1</b> ■ 15 B	<b>S4.1</b> ■ 12 B												

DCON MS tolerance h6; RE ±0.05 mm.

Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
C5053.0	3.00	1.50	6.00	8.00	52.0	2	–	–
C5054.0	4.00	2.00	6.00	11.00	55.0	2	–	–
C5055.0	5.00	2.50	6.00	13.00	57.0	2	–	–
C5056.0	6.00	3.00	6.00	13.00	57.0	2	–	–
C5058.0	8.00	4.00	10.00	19.00	69.0	2	–	–
C50510.0	10.00	5.00	10.00	22.00	72.0	2	–	–
C50512.0	12.00	6.00	12.00	26.00	83.0	2	–	–
C50514.0	14.00	7.00	12.00	26.00	83.0	2	37.50	11.50
C50516.0	16.00	8.00	16.00	32.00	92.0	2	43.50	15.50
C50520.0	20.00	10.00	20.00	38.00	104.0	2	53.50	19.50
C50522.0	22.00	11.00	20.00	38.00	104.0	2	53.50	19.50
C50530.0	30.00	15.00	25.00	45.00	121.0	2	64.50	24.50

Material code (BMC)	HSS-E	HSS-E	HSS-E	HSS-E						
Mill Profile	N	N	N	N						
Number of flutes (NOF)	NOF 4-5	NOF 10-12	NOF 6-8	NOF 6-12						
Cut length										
Flute Helix (FHA)	$\lambda$ 0°	$\lambda$ 0°	$\lambda$ 15°	$\lambda$ 10°						
Flute Helix (FHA)	$\lambda$ 0°	$\lambda$ 0°	$\lambda$ 15°	$\lambda$ 10°						
Radial rake angle (GAMF)	$\gamma$ 0°	$\gamma$ 0°	$\gamma$ 10°	$\gamma$ 10°						
Shank	DIN 1835B	DIN 1835B	DIN 1835	DIN 1835						
Coating	Bright	Bright	Bright	Bright						
Cutting diameter tolerance class (TCDC)		DC js16	DC d11	DC h11						
Direction										
Basic standard group (BSG)		DIN 1833C	DIN 851	DIN 850						


Product Family Code		C700	C830	C800	C822					
PSF cutting diameters range		1.00 – 15.00	12.00 – 32.00	11.00 – 32.00	4.50 – 45.50					
<b>P</b>	P1	■	■	■	■					
	P2	■	■	■	■					
	P3	■	■	■	■					
	P4	■	■	■	■					
<b>M</b>	M1	■	■	■	■					
	M2	■	■	■	■					
	M3	■	■	■	■					
	M4	■	■	■	■					
<b>K</b>	K1	■	■	■	■					
	K2	■	■	■	■					
	K3	■	■	■	■					
	K4	■	■	■	■					
	K5	■	■	■	■					
<b>N</b>	N1	■	■	■	■					
	N2	■	■	■	■					
	N3	■	■	■	■					
	N4		■	■	■					
	N5			■	■					
<b>S</b>	S1	■	■	■	■					
	S2	■	■	■	■					
	S3	■	■	■	■					
	S4	■	■	■	■					
<b>H</b>	H1									
	H2									
	H3									
	H4									

# C700



## HSS-E Corner Rounding Cutter

With an accurate ground radius, suitable for producing accurate corner radii around the perimeter of components. The Weldon shank ensures stable holding to improve radius surface finish. Suitable for corner radius milling. Bright finish.

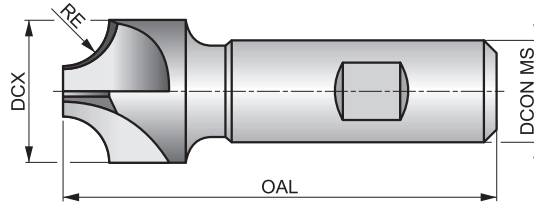

HSS-E	N	NOF 4-5
	$\lambda$ 0°	$\gamma$ 0°
DIN 1835B	Bright	
DORMER		



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 33 W	<b>P1.2</b> ■ 37 W	<b>P1.3</b> ■ 38 W	<b>P2.1</b> ■ 28 W	<b>P2.2</b> ■ 25 W	<b>P2.3</b> ■ 22 W	<b>P3.1</b> ■ 22 W	<b>P3.2</b> ■ 18 W	<b>P3.3</b> ■ 15 W	<b>P4.1</b> ■ 13 W	<b>P4.2</b> ■ 11 W	<b>P4.3</b> ■ 9 W	<b>M1.1</b> ■ 27 U	<b>M1.2</b> ■ 23 U
<b>M2.1</b> ■ 24 U	<b>M2.2</b> ■ 20 U	<b>M3.1</b> ■ 17 U	<b>M3.2</b> ■ 15 U	<b>M3.3</b> ■ 14 U	<b>M4.1</b> ■ 10 U	<b>K1.1</b> ■ 20 W	<b>K1.2</b> ■ 15 W	<b>K1.3</b> ■ 11 W	<b>K2.1</b> ■ 31 W	<b>K2.2</b> ■ 25 W	<b>K2.3</b> ■ 20 W	<b>K3.1</b> ■ 27 W	<b>K3.2</b> ■ 21 W
<b>K3.3</b> ■ 17 W	<b>K4.1</b> ■ 25 U	<b>K4.2</b> ■ 19 U	<b>K4.3</b> ■ 14 U	<b>K4.4</b> ■ 12 U	<b>K4.5</b> ■ 10 U	<b>K5.1</b> ■ 29 W	<b>K5.2</b> ■ 21 W	<b>K5.3</b> ■ 17 W	<b>N1.1</b> ■ 57 X	<b>N1.2</b> ■ 43 X	<b>N1.3</b> ■ 29 X	<b>N2.1</b> ■ 29 X	<b>N2.2</b> ■ 26 X
<b>N2.3</b> ■ 19 X	<b>N3.1</b> ■ 30 X	<b>N3.2</b> ■ 17 X	<b>N3.3</b> ■ 9 X	<b>S1.1</b> ■ 25 U	<b>S1.2</b> ■ 20 U	<b>S1.3</b> ■ 10 U	<b>S2.1</b> ■ 13 U	<b>S2.2</b> ■ 7 U	<b>S3.1</b> ■ 10 U	<b>S3.2</b> ■ 5 U	<b>S4.1</b> ■ 8 U	<b>S4.2</b> ■ 4 U	

DCON MS tolerance h6.


Product	RE (mm)	DCX (mm)	DCON MS (mm)	OAL (mm)	NOF
C7001.0	1.00	10.00	10.00	60.0	4
C7001.5	1.50	10.00	10.00	60.0	4
C7002.0	2.00	10.00	10.00	60.0	4
C7002.5	2.50	10.00	10.00	60.0	4
C7003.0	3.00	12.00	12.00	60.0	4
C7003.5	3.50	12.00	12.00	60.0	4
C7004.0	4.00	15.00	12.00	60.0	4
C7005.0	5.00	18.00	16.00	70.0	4
C7006.0	6.00	21.00	16.00	70.0	4
C7007.0	7.00	24.00	16.00	70.0	4
C7008.0	8.00	24.00	16.00	70.0	4
C7009.0	9.00	28.00	20.00	85.0	4
C70010.0	10.00	28.00	20.00	85.0	4
C70012.0	12.00	35.00	20.00	100.0	4
C70012.5	12.50	35.00	20.00	100.0	4
C70015.0	15.00	48.00	25.00	105.0	5

# C830



## HSS-E Dovetail Cutter

Designed with the optional 45° and 60° angle and Weldon shank for accurate and stable holding, it is suitable for common dovetail forms. The bright finish prevents workpiece material from sticking to the cutting edges of the tool.

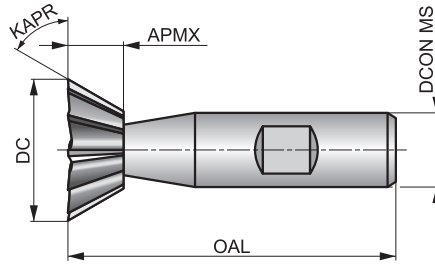

HSS-E	N	NOF 10-12
$\lambda$ 0°	$\gamma$ 0°	DIN 1835B
Bright	DC js16	
DIN 1833C		

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 33 Y	<b>P1.2</b> ■ 37 Y	<b>P1.3</b> ■ 38 Y	<b>P2.1</b> ■ 28 Y	<b>P2.2</b> ■ 25 X	<b>P2.3</b> ■ 22 X	<b>P3.1</b> ■ 22 X	<b>P3.2</b> ■ 18 X	<b>P3.3</b> ■ 15 X	<b>P4.1</b> ■ 13 X	<b>P4.2</b> ■ 11 X	<b>P4.3</b> ■ 9 X	<b>M1.1</b> ■ 27 W	<b>M1.2</b> ■ 23 W
<b>M2.1</b> ■ 24 W	<b>M2.2</b> ■ 20 W	<b>M3.1</b> ■ 17 W	<b>M3.2</b> ■ 15 W	<b>M3.3</b> ■ 14 W	<b>M4.1</b> ■ 10 W	<b>K1.1</b> ■ 20 Y	<b>K1.2</b> ■ 15 Y	<b>K1.3</b> ■ 11 Y	<b>K2.1</b> ■ 31 X	<b>K2.2</b> ■ 25 X	<b>K2.3</b> ■ 20 X	<b>K3.1</b> ■ 27 X	<b>K3.2</b> ■ 21 X
<b>K3.3</b> ■ 17 X	<b>K4.1</b> ■ 25 W	<b>K4.2</b> ■ 19 W	<b>K4.3</b> ■ 14 W	<b>K4.4</b> ■ 12 W	<b>K4.5</b> ■ 10 W	<b>K5.1</b> ■ 29 X	<b>K5.2</b> ■ 21 X	<b>K5.3</b> ■ 17 X	<b>N1.1</b> ■ 59 Z	<b>N1.2</b> ■ 44 Z	<b>N1.3</b> ■ 30 Z	<b>N2.1</b> ■ 30 Z	<b>N2.2</b> ■ 27 Z
<b>N2.3</b> ■ 19 Z	<b>N3.1</b> ■ 31 Y	<b>N3.2</b> ■ 18 Y	<b>N3.3</b> ■ 9 Z	<b>N4.1</b> ■ 31 Z	<b>S1.1</b> ■ 25 Y	<b>S1.2</b> ■ 15 Y	<b>S1.3</b> ■ 10 X	<b>S2.1</b> ■ 13 W	<b>S2.2</b> ■ 7 W	<b>S3.1</b> ■ 10 W	<b>S3.2</b> ■ 5 W	<b>S4.1</b> ■ 8 W	<b>S4.2</b> ■ 4 W

DCON MS tolerance h6.


Product	KAPR (°)	APMX (mm)	DC (mm)	OAL (mm)	DCON MS (mm)	NOF
<b>C83012.0X45</b>	45	3.50	12.00	54.0	10.00	10
<b>C83016.0X45</b>	45	4.00	16.00	60.0	12.00	10
<b>C83020.0X45</b>	45	5.00	20.00	63.0	12.00	10
<b>C83025.0X45</b>	45	6.30	25.00	67.0	12.00	10
<b>C83032.0X45</b>	45	8.00	32.00	71.0	16.00	12
<b>C83012.0X60</b>	60	5.00	12.00	54.0	10.00	10
<b>C83016.0X60</b>	60	6.30	16.00	60.0	12.00	10
<b>C83020.0X60</b>	60	8.00	20.00	63.0	12.00	10
<b>C83025.0X60</b>	60	10.00	25.00	67.0	12.00	10
<b>C83032.0X60</b>	60	12.50	32.00	71.0	16.00	12

# C800



## HSS-E T-Slot Cutter

Suitable for milling T-slots. For accurate and stable holding in all types of toolholder, it has a combination shank and is capable of milling T-slots to accept standard T-bolts. The bright finish prevents workpiece material from sticking to the cutting edges of the tool.

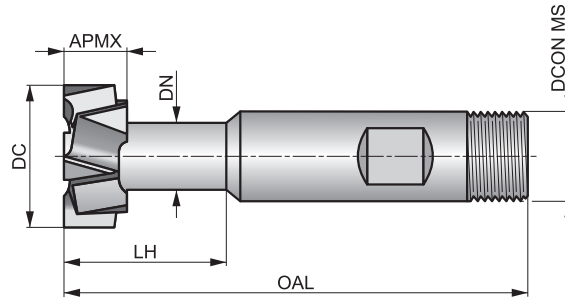

HSS-E	N	NOF 6-8
$\lambda$ 15°	$\gamma$ 10°	DIN 1835
Bright	DC d11	
DIN 851		



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 40V	<b>P1.2</b> ■ 45V	<b>P1.3</b> ■ 46V	<b>P2.1</b> ■ 34V	<b>P2.2</b> ■ 30U	<b>P2.3</b> ■ 27T	<b>P3.1</b> ■ 29U	<b>P3.2</b> ■ 24U	<b>P3.3</b> ■ 20T	<b>P4.1</b> ■ 18U	<b>P4.2</b> ■ 15T	<b>P4.3</b> ■ 12T	<b>M1.1</b> ■ 27S	<b>M1.2</b> ■ 23S
<b>M2.1</b> ■ 24S	<b>M2.2</b> ■ 20S	<b>M3.1</b> ■ 17S	<b>M3.2</b> ■ 15S	<b>M3.3</b> ■ 14S	<b>M4.1</b> ■ 10S	<b>K1.1</b> ■ 20V	<b>K1.2</b> ■ 15V	<b>K1.3</b> ■ 11V	<b>K2.1</b> ■ 37U	<b>K2.2</b> ■ 30U	<b>K2.3</b> ■ 24U	<b>K3.1</b> ■ 33U	<b>K3.2</b> ■ 25U
<b>K3.3</b> ■ 20U	<b>K4.1</b> ■ 30S	<b>K4.2</b> ■ 23S	<b>K4.3</b> ■ 17S	<b>K4.4</b> ■ 14S	<b>K4.5</b> ■ 12S	<b>K5.1</b> ■ 34U	<b>K5.2</b> ■ 26U	<b>K5.3</b> ■ 20U	<b>N1.1</b> ■ 71Y	<b>N1.2</b> ■ 53Y	<b>N1.3</b> ■ 36Y	<b>N2.1</b> ■ 36Y	<b>N2.2</b> ■ 32Y
<b>N2.3</b> ■ 23Y	<b>N3.1</b> ■ 38V	<b>N3.2</b> ■ 22V	<b>N3.3</b> ■ 11W	<b>N4.1</b> ■ 38Y	<b>S1.1</b> ■ 30V	<b>S1.2</b> ■ 20V	<b>S1.3</b> ■ 10U	<b>S2.1</b> ■ 13U	<b>S2.2</b> ■ 7T	<b>S3.1</b> ■ 10U	<b>S3.2</b> ■ 5T	<b>S4.1</b> ■ 8U	<b>S4.2</b> ■ 4T

DCON MS tolerance h6.


Product	APMX (mm)	DC (mm)	T DIN650	DN (mm)	LH (mm)	OAL (mm)	DCON MS (mm)	NOF
<b>C80011.0X5.0</b>	4.00	11.00	5	4.00	10.5	53.5	10.00	6
<b>C80012.5X6.0</b>	6.00	12.50	6	5.00	15.0	57.0	10.00	6
<b>C80016.0X8.0</b>	8.00	16.00	8	7.00	20.0	62.0	10.00	6
<b>C80018.0X10.0</b>	8.00	18.00	10	8.00	23.0	70.0	12.00	6
<b>C80021.0X12.0</b>	9.00	21.00	12	10.00	27.0	74.0	12.00	8
<b>C80025.0X14.0</b>	11.00	25.00	14	12.00	31.0	82.0	16.00	8
<b>C80032.0X18.0</b>	14.00	32.00	18	15.00	40.0	90.0	16.00	8

# C822



## HSS-E Woodruff Cutter

Suitable for milling Woodruff keys in spindles and shafts. The combination shank provides stable and accurate holding in all types of holders. The bright finish prevents workpiece material from sticking to the cutting edges of the tool.

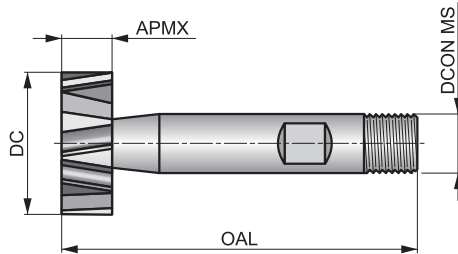

HSS-E	N	NOF 6-12
$\lambda$ 10°	$\gamma$ 10°	DIN 1835
Bright	DC h11	
DIN 850		



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 40V	<b>P1.2</b> ■ 45V	<b>P1.3</b> ■ 46V	<b>P2.1</b> ■ 34V	<b>P2.2</b> ■ 30U	<b>P2.3</b> ■ 27T	<b>P3.1</b> ■ 29U	<b>P3.2</b> ■ 24U	<b>P3.3</b> ■ 20T	<b>P4.1</b> ■ 18U	<b>P4.2</b> ■ 15T	<b>P4.3</b> ■ 12T	<b>M1.1</b> ■ 34S	<b>M1.2</b> ■ 29S
<b>M2.1</b> ■ 31S	<b>M2.2</b> ■ 25S	<b>M3.1</b> ■ 17S	<b>M3.2</b> ■ 15S	<b>M3.3</b> ■ 14S	<b>M4.1</b> ■ 15S	<b>K1.1</b> ■ 25V	<b>K1.2</b> ■ 19V	<b>K1.3</b> ■ 14V	<b>K2.1</b> ■ 37U	<b>K2.2</b> ■ 30U	<b>K2.3</b> ■ 24U	<b>K3.1</b> ■ 33U	<b>K3.2</b> ■ 25U
<b>K3.3</b> ■ 20U	<b>K4.1</b> ■ 30S	<b>K4.2</b> ■ 23S	<b>K4.3</b> ■ 17S	<b>K4.4</b> ■ 14S	<b>K4.5</b> ■ 12S	<b>K5.1</b> ■ 34U	<b>K5.2</b> ■ 26U	<b>K5.3</b> ■ 20U	<b>N1.1</b> ■ 71Y	<b>N1.2</b> ■ 53Y	<b>N1.3</b> ■ 36Y	<b>N2.1</b> ■ 36Y	<b>N2.2</b> ■ 32Y
<b>N2.3</b> ■ 23Y	<b>N3.1</b> ■ 38V	<b>N3.2</b> ■ 22V	<b>N3.3</b> ■ 11W	<b>N4.1</b> ■ 38Y	<b>S1.1</b> ■ 30V	<b>S1.2</b> ■ 20V	<b>S1.3</b> ■ 10U	<b>S2.1</b> ■ 13U	<b>S2.2</b> ■ 7T	<b>S3.1</b> ■ 10U	<b>S3.2</b> ■ 5T	<b>S4.1</b> ■ 8U	<b>S4.2</b> ■ 4T

DCON MS tolerance h6.

Product	APMX (mm)	DC (mm)	OAL (mm)	DCON MS (mm)	NOF
C8224.5X1.0	1.00	4.50	50.0	6.00	6
C8227.5X1.5	1.50	7.50	50.0	6.00	6
C8227.5X2.0	2.00	7.50	50.0	6.00	6
C82210.5X2.0	2.00	10.50	50.0	6.00	8
C82210.5X2.5	2.50	10.50	50.0	6.00	8
C82210.5X3.0	3.00	10.50	50.0	6.00	8
C82213.5X3.0	3.00	13.50	56.0	10.00	8
C82213.5X4.0	4.00	13.50	56.0	10.00	8
C82216.5X3.0	3.00	16.50	56.0	10.00	8
C82216.5X4.0	4.00	16.50	56.0	10.00	8
C82216.5X5.0	5.00	16.50	56.0	10.00	8
C82219.5X3.0	3.00	19.50	63.0	10.00	10
C82219.5X4.0	4.00	19.50	63.0	10.00	10
C82219.5X5.0	5.00	19.50	63.0	10.00	10
C82222.5X5.0	5.00	22.50	63.0	10.00	10
C82222.5X6.0	6.00	22.50	63.0	10.00	10
C82222.5X8.0	8.00	22.50	63.0	10.00	10
C82225.5X6.0	6.00	25.50	63.0	10.00	12
C82228.5X6.0	6.00	28.50	63.0	10.00	12
C82228.5X8.0	8.00	28.50	63.0	10.00	12
C82228.5X10.0	10.00	28.50	71.0	12.00	12
C82232.5X8.0	8.00	32.50	71.0	12.00	12
C82232.5X10.0	10.00	32.50	71.0	12.00	12
C82245.5X10.0	10.00	45.50	71.0	12.00	12

Material code (BMC)	HSS	HSS	HSS	HSS	HSS	HSS
Mill Profile						
Number of flutes (NOF)						
Flute Helix (FHA)						
Flute Helix (FHA)						
Radial rake angle (GAMF)	$\gamma$ 15°	$\gamma$ 5°	$\gamma$ 18°	$\gamma$ 18°	$\gamma$ 18°	$\gamma$ 18°
Coating	Bright	Bright	ST	ST	ST	ST
Cutting diameter tolerance class (TCDC)						
Direction						
Basic standard group (BSG)	DIN 1838	DIN 1837	DORMER	DORMER	DORMER	DORMER
Product Family Code	<b>D745</b>	<b>D747</b>	<b>D750</b>	<b>D751</b>	<b>D752</b>	<b>D753</b>
PSF cutting diameters range	50.00 – 250.00	32.00 – 200.00	200.00 – 350.00	200.00 – 350.00	250.00 – 350.00	250.00 – 350.00
<b>P</b>	P1	■	■	■	■	■
	P2	■	■	■	■	■
	P3	■	■	■	■	■
	P4	■	■	■	■	■
<b>M</b>	M1	▣	▣	▣	▣	▣
	M2	▣	▣	▣	▣	▣
	M3	▣	▣	▣	▣	▣
	M4					
<b>K</b>	K1	■	■	■	■	■
	K2	■	■	■	■	■
	K3	■	■	■	■	■
	K4	■	■	■	■	■
	K5	■	■	■	■	■
<b>N</b>	N1	■	■	■	■	■
	N2	■	■	■	■	■
	N3	■	■	■	■	■
	N4	■	■	■	■	■
	N5					
<b>S</b>	S1					
	S2					
	S3					
	S4					
<b>H</b>	H1					
	H2					
	H3					
	H4					

HSS-E	HSS-E	HSS-E	HSS-E
	N	N	NR
$\lambda$ 15°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°
$\lambda$ 15°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°
$\gamma$ 10°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°
Bright	Bright	TiCN	Bright
DC js16	DC js16	DC js16	DC js16
DIN 885A	DIN 1880	DIN 1880	DIN 1880



D763	D400	D420	D402
------	------	------	------

63.00 – 125.00	40.00 – 50.00	63.00	63.00
----------------	---------------	-------	-------

64	65	66	67
----	----	----	----


P1	■	■	■	■
P2	■	■	■	■
P3	■	■	■	■
P4	■	☑	■	☑
M1	■	■	■	■
M2	■	■	■	■
M3	■	☑	■	☑
M4	■	■	■	■
K1	■	■	■	■
K2	■	■	■	■
K3	■	■	■	■
K4	■	■	■	■
K5	■	■	■	■
N1	■	☑	☑	☑
N2	■	■	■	■
N3	■	■	■	■
N4	■	☑	☑	☑
N5	■	■	■	■
S1	■	☑	■	☑
S2	■	☑	■	☑
S3	■	☑	■	☑
S4	■	☑	■	☑
H1				
H2				
H3				
H4				

# D745



## HSS Slitting Saw Coarse Pitch

Designed with a coarse pitch, ideal for narrow, deep slots, whilst the dish ground and neutral tooth geometry, helps control chips and prevents rubbing when milling deep slots. Suitable for horizontal milling of slots and parting-off applications. Bright finish.

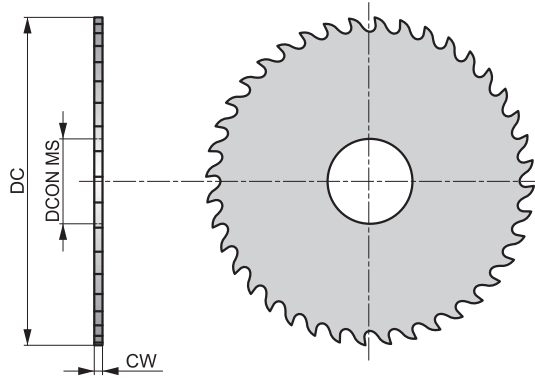

HSS		$\gamma$ 15°
Bright	DIN 1838	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 40 Q	<b>P1.2</b> ■ 45 Q	<b>P1.3</b> ■ 46 Q	<b>P2.1</b> ■ 34 Q	<b>P2.2</b> ■ 30 Q	<b>P3.1</b> ■ 29 P	<b>P3.2</b> ■ 24 P	<b>P4.1</b> ■ 18 P	<b>M1.1</b> ▣ 14 P	<b>M1.2</b> ▣ 12 P	<b>M2.1</b> ▣ 12 P	<b>M2.2</b> ▣ 10 P	<b>M3.1</b> ▣ 12 P	<b>M3.2</b> ▣ 10 P
<b>K1.1</b> ■ 40 Q	<b>K1.2</b> ■ 30 Q	<b>K1.3</b> ■ 22 Q	<b>K2.1</b> ■ 37 Q	<b>K2.2</b> ■ 30 Q	<b>K3.1</b> ■ 33 Q	<b>K3.2</b> ■ 25 Q	<b>K4.1</b> ■ 30 P	<b>K4.2</b> ■ 23 P	<b>K5.1</b> ■ 34 Q	<b>K5.2</b> ■ 26 Q	<b>N1.1</b> ■ 600 R	<b>N1.2</b> ■ 450 R	<b>N1.3</b> ■ 300 R
<b>N2.1</b> ■ 769 R	<b>N2.2</b> ■ 692 R	<b>N2.3</b> ■ 500 R	<b>N3.1</b> ■ 339 R	<b>N3.2</b> ■ 200 R	<b>N3.3</b> ■ 100 Q	<b>N4.1</b> ■ 60 R							

Product	DC	CW	DCON MS	NOF
	(mm)	(mm)	(mm)	
D74550.0X.5	50.00	0.5	13.00	48
D74550.0X.8	50.00	0.8	13.00	40
D74550.0X1.0	50.00	1.0	13.00	40
D74550.0X1.2	50.00	1.2	13.00	40
D74550.0X1.5	50.00	1.5	13.00	32
D74550.0X1.6	50.00	1.6	13.00	32
D74550.0X2.0	50.00	2.0	13.00	32
D74563.0X.5	63.00	0.5	16.00	64
D74563.0X.6	63.00	0.6	16.00	48
D74563.0X.8	63.00	0.8	16.00	48
D74563.0X1.0	63.00	1.0	16.00	48
D74563.0X1.2	63.00	1.2	16.00	40
D74563.0X1.5	63.00	1.5	16.00	40
D74563.0X1.6	63.00	1.6	16.00	40
D74563.0X2.0	63.00	2.0	16.00	40
D74580.0X1.0	80.00	1.0	22.00	48
D74580.0X1.2	80.00	1.2	22.00	48
D74580.0X1.5	80.00	1.5	22.00	48
D74580.0X1.6	80.00	1.6	22.00	48
D74580.0X2.0	80.00	2.0	22.00	40
D74580.0X2.5	80.00	2.5	22.00	40
D74580.0X3.0	80.00	3.0	22.00	40
D745100.0X1.0	100.00	1.0	22.00	64
D745100.0X1.2	100.00	1.2	22.00	64
D745100.0X1.5	100.00	1.5	22.00	48
D745100.0X1.6	100.00	1.6	22.00	48
D745100.0X2.0	100.00	2.0	22.00	48
D745100.0X2.5	100.00	2.5	22.00	48



Product	DC	CW	DCON MS	NOF
	(mm)	(mm)	(mm)	
D745100.0X3.0	100.00	3.0	22.00	40
D745100.0X4.0	100.00	4.0	22.00	40
D745125.0X1.0	125.00	1.0	22.00	80
D745125.0X1.2	125.00	1.2	22.00	64
D745125.0X1.5	125.00	1.5	22.00	64
D745125.0X1.6	125.00	1.6	22.00	64
D745125.0X2.0	125.00	2.0	22.00	64
D745125.0X2.5	125.00	2.5	22.00	48
D745125.0X3.0	125.00	3.0	22.00	48
D745160.0X2.0	160.00	2.0	32.00	64
D745160.0X2.5	160.00	2.5	32.00	64
D745160.0X3.0	160.00	3.0	32.00	64
D745200.0X1.6	200.00	1.6	32.00	80
D745200.0X2.0	200.00	2.0	32.00	80
D745200.0X2.5	200.00	2.5	32.00	80
D745200.0X3.0	200.00	3.0	32.00	64
D745250.0X2.0	250.00	2.0	32.00	100


# D747

**DORMER**



## HSS Slitting Saw Fine Pitch

Designed with a neutral tooth geometry to help control chips and prevent rubbing when milling deep slots. The fine pitch design makes it ideal for narrow, deep slots, and can be used for horizontal milling slots and parting-off applications. Bright finish.

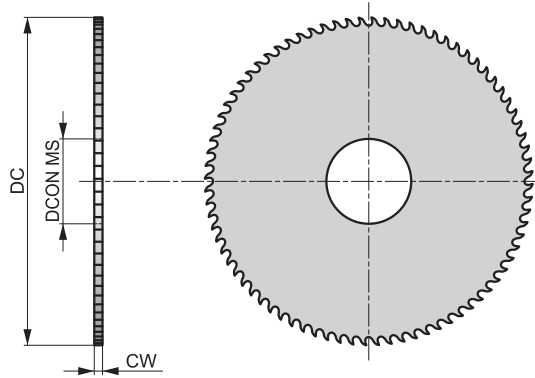

HSS		γ 5°
Bright	DIN 1837	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 40 Q	<b>P1.2</b> ■ 45 Q	<b>P1.3</b> ■ 46 Q	<b>P2.1</b> ■ 34 Q	<b>P2.2</b> ■ 30 Q	<b>P3.1</b> ■ 29 P	<b>P3.2</b> ■ 24 P	<b>P4.1</b> ■ 18 P	<b>M1.1</b> ▣ 14 P	<b>M1.2</b> ▣ 12 P	<b>M2.1</b> ▣ 12 P	<b>M2.2</b> ▣ 10 P	<b>M3.1</b> ▣ 12 P	<b>M3.2</b> ▣ 10 P
<b>K1.1</b> ■ 40 Q	<b>K1.2</b> ■ 30 Q	<b>K1.3</b> ■ 22 Q	<b>K2.1</b> ■ 37 Q	<b>K2.2</b> ■ 30 Q	<b>K3.1</b> ■ 33 Q	<b>K3.2</b> ■ 25 Q	<b>K4.1</b> ■ 30 P	<b>K4.2</b> ■ 23 P	<b>K5.1</b> ■ 34 Q	<b>K5.2</b> ■ 26 Q	<b>N1.1</b> ■ 600 R	<b>N1.2</b> ■ 450 R	<b>N1.3</b> ■ 300 R
<b>N2.1</b> ■ 769 R	<b>N2.2</b> ■ 692 R	<b>N2.3</b> ■ 500 R	<b>N3.1</b> ■ 339 R	<b>N3.2</b> ■ 200 R	<b>N3.3</b> ■ 100 Q	<b>N4.1</b> ■ 60 R							

Product	DC	CW	DCON MS	NOF
	(mm)	(mm)	(mm)	
D74732.0X.3	32.00	0.3	8.00	80
D74732.0X.4	32.00	0.4	8.00	80
D74732.0X.5	32.00	0.5	8.00	80
D74732.0X.6	32.00	0.6	8.00	64
D74732.0X.8	32.00	0.8	8.00	64
D74732.0X1.0	32.00	1.0	8.00	64
D74732.0X1.2	32.00	1.2	8.00	48
D74732.0X1.5	32.00	1.5	8.00	48
D74732.0X1.6	32.00	1.6	8.00	48
D74732.0X2.0	32.00	2.0	8.00	48
D74740.0X.3	40.00	0.3	10.00	100
D74740.0X.4	40.00	0.4	10.00	100
D74740.0X.5	40.00	0.5	10.00	80
D74740.0X.8	40.00	0.8	10.00	80
D74740.0X1.0	40.00	1.0	10.00	64
D74740.0X1.2	40.00	1.2	10.00	64
D74740.0X1.5	40.00	1.5	10.00	64
D74740.0X1.6	40.00	1.6	10.00	64
D74740.0X2.0	40.00	2.0	10.00	48
D74750.0X.3	50.00	0.3	13.00	128
D74750.0X.4	50.00	0.4	13.00	100
D74750.0X.5	50.00	0.5	13.00	100
D74750.0X.6	50.00	0.6	13.00	100
D74750.0X.8	50.00	0.8	13.00	80
D74750.0X1.0	50.00	1.0	13.00	80
D74750.0X1.2	50.00	1.2	13.00	80
D74750.0X1.5	50.00	1.5	13.00	64
D74750.0X1.6	50.00	1.6	13.00	64




Product	DC	CW	DCON MS	NOF
	(mm)	(mm)	(mm)	
D74750.0X2.0	50.00	2.0	13.00	64
D74750.0X2.5	50.00	2.5	13.00	64
D74750.0X3.0	50.00	3.0	13.00	48
D74763.0X.5	63.00	0.5	16.00	128
D74763.0X.6	63.00	0.6	16.00	100
D74763.0X.8	63.00	0.8	16.00	100
D74763.0X1.0	63.00	1.0	16.00	100
D74763.0X1.2	63.00	1.2	16.00	80
D74763.0X1.5	63.00	1.5	16.00	80
D74763.0X1.6	63.00	1.6	16.00	80
D74763.0X2.0	63.00	2.0	16.00	80
D74763.0X2.5	63.00	2.5	16.00	64
D74763.0X3.0	63.00	3.0	16.00	64
D74763.0X4.0	63.00	4.0	16.00	64
D74780.0X.5	80.00	0.5	22.00	128
D74780.0X.6	80.00	0.6	22.00	128
D74780.0X.8	80.00	0.8	22.00	128
D74780.0X1.0	80.00	1.0	22.00	100
D74780.0X1.2	80.00	1.2	22.00	100
D74780.0X1.5	80.00	1.5	22.00	100
D74780.0X1.6	80.00	1.6	22.00	100
D74780.0X2.0	80.00	2.0	22.00	80
D74780.0X2.5	80.00	2.5	22.00	80
D74780.0X3.0	80.00	3.0	22.00	80
D74780.0X4.0	80.00	4.0	22.00	64
D747100.0X.5	100.00	0.5	22.00	160
D747100.0X.6	100.00	0.6	22.00	160
D747100.0X.8	100.00	0.8	22.00	128
D747100.0X1.0	100.00	1.0	22.00	128
D747100.0X1.2	100.00	1.2	22.00	128
D747100.0X1.5	100.00	1.5	22.00	100
D747100.0X1.6	100.00	1.6	22.00	100
D747100.0X2.0	100.00	2.0	22.00	100
D747100.0X2.5	100.00	2.5	22.00	100
D747100.0X3.0	100.00	3.0	22.00	80
D747100.0X4.0	100.00	4.0	22.00	80
D747125.0X1.0	125.00	1.0	22.00	160
D747125.0X1.2	125.00	1.2	22.00	128
D747125.0X1.5	125.00	1.5	22.00	128
D747125.0X1.6	125.00	1.6	22.00	128
D747125.0X2.0	125.00	2.0	22.00	128
D747125.0X2.5	125.00	2.5	22.00	100
D747125.0X3.0	125.00	3.0	22.00	100
D747125.0X4.0	125.00	4.0	22.00	100
D747160.0X1.0	160.00	1.0	32.00	160
D747160.0X1.2	160.00	1.2	32.00	160
D747160.0X1.5	160.00	1.5	32.00	160
D747160.0X2.0	160.00	2.0	32.00	128
D747160.0X2.5	160.00	2.5	32.00	128
D747160.0X3.0	160.00	3.0	32.00	128
D747200.0X1.0	200.00	1.0	32.00	200
D747200.0X1.2	200.00	1.2	32.00	200
D747200.0X2.0	200.00	2.0	32.00	160
D747200.0X3.0	200.00	3.0	32.00	128

# D750



## HSS Slitting Saw Fine Pitch

Designed with fine pitch, ideal for thin section components. Suitable for slitting and cutting. With ranges from 130 to 220 teeth, the neutral tooth geometry helps control chips and prevents rubbing when slitting tubes and pipes. The steam oxide finish acts to retain cutting fluid and prevent chip tool welding.

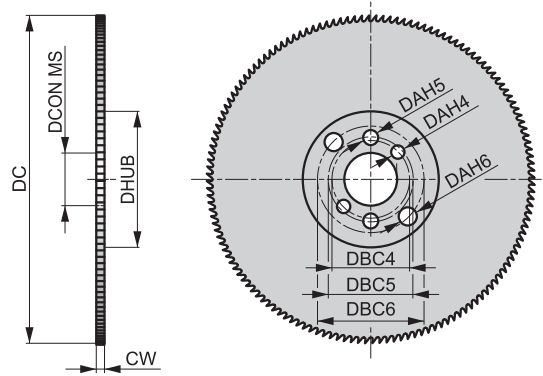

HSS
 $\gamma$  18°



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 40 Q	<b>P1.2</b> ■ 45 Q	<b>P1.3</b> ■ 46 Q	<b>P2.1</b> ■ 34 Q	<b>P2.2</b> ■ 30 Q	<b>P3.1</b> ■ 29 P	<b>P3.2</b> ■ 24 P	<b>P4.1</b> ■ 18 P	<b>M1.1</b> ▣ 14 P	<b>M1.2</b> ▣ 12 P	<b>M2.1</b> ▣ 12 P	<b>M2.2</b> ▣ 10 P	<b>M3.1</b> ▣ 12 P	<b>M3.2</b> ▣ 10 P
<b>K1.1</b> ■ 40 Q	<b>K1.2</b> ■ 30 Q	<b>K1.3</b> ■ 22 Q	<b>K2.1</b> ■ 37 Q	<b>K2.2</b> ■ 30 Q	<b>K3.1</b> ■ 33 Q	<b>K3.2</b> ■ 25 Q	<b>K4.1</b> ■ 30 P	<b>K4.2</b> ■ 23 P	<b>K5.1</b> ■ 34 Q	<b>K5.2</b> ■ 26 Q	<b>N1.1</b> ■ 600 R	<b>N1.2</b> ■ 450 R	<b>N1.3</b> ■ 300 R
<b>N2.1</b> ■ 769 R	<b>N2.2</b> ■ 692 R	<b>N2.3</b> ■ 500 R	<b>N3.1</b> ■ 339 R	<b>N3.2</b> ■ 200 R	<b>N3.3</b> ■ 100 Q	<b>N4.1</b> ■ 60 R							


Product	DC (mm)	CW (mm)	DCON MS (mm)	NOF	P (mm)	DHUB (mm)	DAH4 (mm)	DBC4 (mm)	DAH5 (mm)	DBC5 (mm)	DAH6 (mm)	DBC6 (mm)
D750200.0X1.8	200.00	1.8	32.00	130	5	100	8	45	9	50	11	63
D750225.0X2.0	225.00	2.0	32.00	140	5	100	8	45	9	50	11	63
D750250.0X2.0	250.00	2.0	32.00	160	5	100	8	45	9	50	11	63
D750275.0X2.5	275.00	2.5	32.00	180	5	100	8	45	9	50	11	63
D750300.0X2.5	300.00	2.5	32.00	180	5	100	8	45	9	50	11	63
D750315.0X2.5	315.00	2.5	32.00	200	5	100	8	45	9	50	11	63
D750350.0X2.5	350.00	2.5	32.00	220	5	120	8	45	9	59	11	63

# D751



## HSS Slitting Saw Fine Pitch

Designed with fine pitch, ideal for thin section components. Suitable for slitting and cutting. With ranges from 160 to 350 teeth, the neutral tooth geometry helps control chips and prevents rubbing when slitting tubes and pipes. The steam oxide finish acts to retain cutting fluid and prevent chip tool welding.

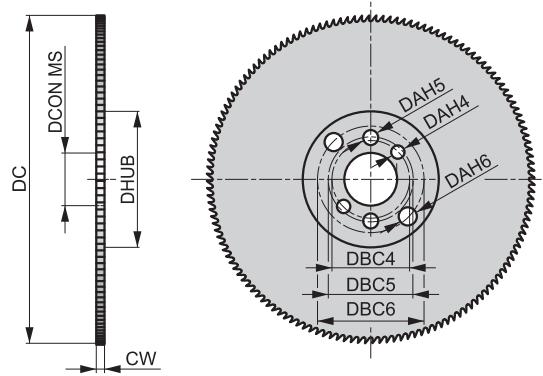

HSS
 $\gamma$  18°



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 40 Q	<b>P1.2</b> ■ 45 Q	<b>P1.3</b> ■ 46 Q	<b>P2.1</b> ■ 34 Q	<b>P2.2</b> ■ 30 Q	<b>P3.1</b> ■ 29 P	<b>P3.2</b> ■ 24 P	<b>P4.1</b> ■ 18 P	<b>M1.1</b> ▣ 14 P	<b>M1.2</b> ▣ 12 P	<b>M2.1</b> ▣ 12 P	<b>M2.2</b> ▣ 10 P	<b>M3.1</b> ▣ 12 P	<b>M3.2</b> ▣ 10 P
<b>K1.1</b> ■ 40 Q	<b>K1.2</b> ■ 30 Q	<b>K1.3</b> ■ 22 Q	<b>K2.1</b> ■ 37 Q	<b>K2.2</b> ■ 30 Q	<b>K3.1</b> ■ 33 Q	<b>K3.2</b> ■ 25 Q	<b>K4.1</b> ■ 30 P	<b>K4.2</b> ■ 23 P	<b>K5.1</b> ■ 34 Q	<b>K5.2</b> ■ 26 Q	<b>N1.1</b> ■ 600 R	<b>N1.2</b> ■ 450 R	<b>N1.3</b> ■ 300 R
<b>N2.1</b> ■ 769 R	<b>N2.2</b> ■ 692 R	<b>N2.3</b> ■ 500 R	<b>N3.1</b> ■ 339 R	<b>N3.2</b> ■ 200 R	<b>N3.3</b> ■ 100 Q	<b>N4.1</b> ■ 60 R							


Product	DC (mm)	CW (mm)	DCON MS (mm)	NOF	P (mm)	DHUB (mm)	DAH4 (mm)	DBC4 (mm)	DAH5 (mm)	DBC5 (mm)	DAH6 (mm)	DBC6 (mm)
D751200.0X1.8X160	200.00	1.8	32.00	160	4	100	8	45	9	50	11	63
D751200.0X1.8X200	200.00	1.8	32.00	200	3	100	8	45	9	50	11	63
D751225.0X2.0X180	225.00	2.0	32.00	180	4	100	8	45	9	50	11	63
D751225.0X2.0X220	225.00	2.0	32.00	220	3	100	8	45	9	50	11	63
D751250.0X2.0X200	250.00	2.0	32.00	200	4	100	8	45	9	50	11	63
D751250.0X2.0X250	250.00	2.0	32.00	250	3	100	8	45	9	50	11	63
D751275.0X2.5X220	275.00	2.5	32.00	220	4	100	8	45	9	50	11	63
D751300.0X2.5X220	300.00	2.5	32.00	220	4	100	8	45	9	50	11	63
D751300.0X2.5X300	300.00	2.5	32.00	300	3	100	8	45	9	50	11	63
D751315.0X2.5X240	315.00	2.5	32.00	240	4	100	8	45	9	50	11	63
D751350.0X2.5X280	350.00	2.5	32.00	280	4	120	8	45	9	50	11	63
D751350.0X2.5X350	350.00	2.5	32.00	350	3	120	8	45	9	50	11	63

# D752



## HSS Slitting Saw Coarse Pitch

Designed with coarse pitch, ideal for thin section components. The dish ground and neutral tooth geometry, in addition to helping control chips, also prevents rubbing when slitting tubes and pipes. Suitable for slitting and cutting. The steam oxide finish acts to retain cutting fluid and prevent chip tool welding.

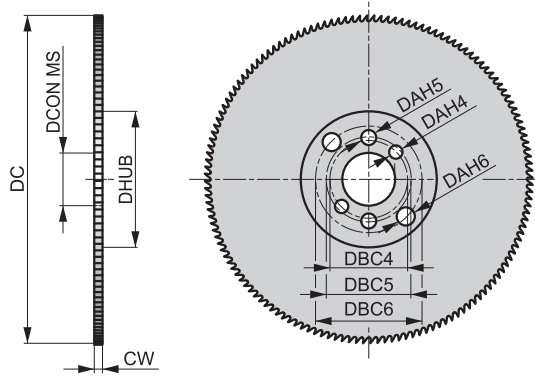

**HSS**  
  
 $\gamma$  18°




Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 40 Q	<b>P1.2</b> ■ 45 Q	<b>P1.3</b> ■ 46 Q	<b>P2.1</b> ■ 34 Q	<b>P2.2</b> ■ 30 Q	<b>P3.1</b> ■ 29 P	<b>P3.2</b> ■ 24 P	<b>P4.1</b> ■ 18 P	<b>M1.1</b> ▣ 14 P	<b>M1.2</b> ▣ 12 P	<b>M2.1</b> ▣ 12 P	<b>M2.2</b> ▣ 10 P	<b>M3.1</b> ▣ 12 P	<b>M3.2</b> ▣ 10 P
<b>K1.1</b> ■ 40 Q	<b>K1.2</b> ■ 30 Q	<b>K1.3</b> ■ 22 Q	<b>K2.1</b> ■ 37 Q	<b>K2.2</b> ■ 30 Q	<b>K3.1</b> ■ 33 Q	<b>K3.2</b> ■ 25 Q	<b>K4.1</b> ■ 30 P	<b>K4.2</b> ■ 23 P	<b>K5.1</b> ■ 34 Q	<b>K5.2</b> ■ 26 Q	<b>N1.1</b> ■ 600 R	<b>N1.2</b> ■ 450 R	<b>N1.3</b> ■ 300 R
<b>N2.1</b> ■ 769 R	<b>N2.2</b> ■ 692 R	<b>N2.3</b> ■ 500 R	<b>N3.1</b> ■ 339 R	<b>N3.2</b> ■ 200 R	<b>N3.3</b> ■ 100 Q	<b>N4.1</b> ■ 60 R							


Product	DC (mm)	CW (mm)	DCON MS (mm)	NOF	P (mm)	DHUB (mm)	DAH4 (mm)	DBC4 (mm)	DAH5 (mm)	DBC5 (mm)	DAH6 (mm)	DBC6 (mm)
D752250.0X2.0X128	250.00	2.0	32.00	128	6	100	8	45	9	50	11	63
D752300.0X2.5X160	300.00	2.5	32.00	160	6	100	8	45	9	50	11	63
D752315.0X2.5X160	315.00	2.5	32.00	160	6	100	8	45	9	50	11	63
D752350.0X2.5X180	350.00	2.5	32.00	180	6	120	8	45	9	50	11	63

# D753



## HSS Slitting Saw Coarse Pitch

Designed with coarse pitch, ideal for thin section components. The dish ground and neutral tooth geometry, in addition to helping control chips, also prevents rubbing when slitting tubes and pipes. Suitable for slitting and cutting. The steam oxide finish acts to retain cutting fluid and prevent chip tool welding.

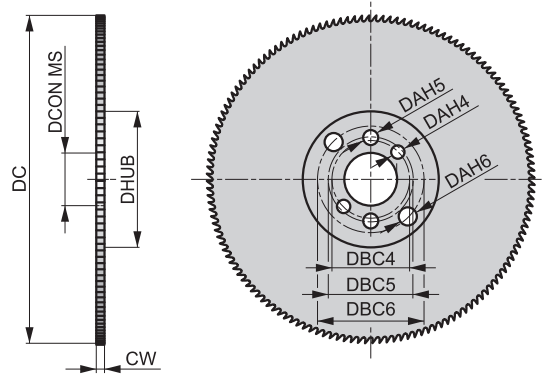

HSS
 $\gamma$  18°



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 40 Q	<b>P1.2</b> ■ 45 Q	<b>P1.3</b> ■ 46 Q	<b>P2.1</b> ■ 34 Q	<b>P2.2</b> ■ 30 Q	<b>P3.1</b> ■ 29 P	<b>P3.2</b> ■ 24 P	<b>P4.1</b> ■ 18 P	<b>M1.1</b> ▣ 14 P	<b>M1.2</b> ▣ 12 P	<b>M2.1</b> ▣ 12 P	<b>M2.2</b> ▣ 10 P	<b>M3.1</b> ▣ 12 P	<b>M3.2</b> ▣ 10 P
<b>K1.1</b> ■ 40 Q	<b>K1.2</b> ■ 30 Q	<b>K1.3</b> ■ 22 Q	<b>K2.1</b> ■ 37 Q	<b>K2.2</b> ■ 30 Q	<b>K3.1</b> ■ 33 Q	<b>K3.2</b> ■ 25 Q	<b>K4.1</b> ■ 30 P	<b>K4.2</b> ■ 23 P	<b>K5.1</b> ■ 34 Q	<b>K5.2</b> ■ 26 Q	<b>N1.1</b> ■ 600 R	<b>N1.2</b> ■ 450 R	<b>N1.3</b> ■ 300 R
<b>N2.1</b> ■ 769 R	<b>N2.2</b> ■ 692 R	<b>N2.3</b> ■ 500 R	<b>N3.1</b> ■ 339 R	<b>N3.2</b> ■ 200 R	<b>N3.3</b> ■ 100 Q	<b>N4.1</b> ■ 60 R							


Product	DC (mm)	CW (mm)	DCON MS (mm)	NOF	P (mm)	DHUB (mm)	DAH4 (mm)	DBC4 (mm)	DAH5 (mm)	DBC5 (mm)	DAH6 (mm)	DBC6 (mm)
<b>D753250.0X2.0</b>	250.00	2.0	32.00	100	8	100	8	45	9	50	11	63
<b>D753350.0X2.5</b>	350.00	2.5	32.00	140	8	120	8	45	9	50	11	63

# D763



## HSS-E Side and Face Fine Pitch Milling Cutter

Designed with a fine pitch, ideal for narrow, deep slots, where the staggered tooth geometry also helps control chips during milling. A very versatile tool which can be used for horizontal milling slots and parting-off applications. The bright finish prevents workpiece material from sticking to the cutting edges of the tool.

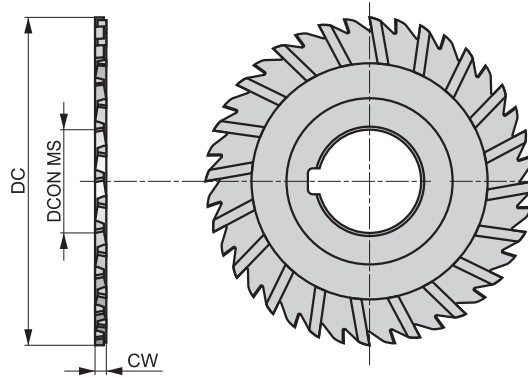

HSS-E		$\lambda$ 15°
$\gamma$ 10°	Bright	DC js16
DIN 885A		



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 46 X	<b>P1.2</b> ■ 52 X	<b>P1.3</b> ■ 54 X	<b>P2.1</b> ■ 40 X	<b>P2.2</b> ■ 35 X	<b>P2.3</b> ■ 31 X	<b>P3.1</b> ■ 29 X	<b>P3.2</b> ■ 24 X	<b>P3.3</b> ■ 20 X	<b>P4.1</b> ■ 18 X	<b>P4.2</b> ■ 15 X	<b>P4.3</b> ■ 12 X	<b>M1.1</b> ■ 41 X	<b>M1.2</b> ■ 35 X
<b>M2.1</b> ■ 37 X	<b>M2.2</b> ■ 30 X	<b>M3.1</b> ■ 23 X	<b>M3.2</b> ■ 20 X	<b>M3.3</b> ■ 18 X	<b>M4.1</b> ■ 10 X	<b>K1.1</b> ■ 30 X	<b>K1.2</b> ■ 22 X	<b>K1.3</b> ■ 17 X	<b>K2.1</b> ■ 49 X	<b>K2.2</b> ■ 40 X	<b>K2.3</b> ■ 32 X	<b>K3.1</b> ■ 44 X	<b>K3.2</b> ■ 33 X
<b>K3.3</b> ■ 27 X	<b>K4.1</b> ■ 40 X	<b>K4.2</b> ■ 30 X	<b>K4.3</b> ■ 22 X	<b>K4.4</b> ■ 19 X	<b>K4.5</b> ■ 16 X	<b>K5.1</b> ■ 46 X	<b>K5.2</b> ■ 34 X	<b>K5.3</b> ■ 27 X	<b>N1.1</b> ■ 83 X	<b>N1.2</b> ■ 62 X	<b>N1.3</b> ■ 42 X	<b>N2.1</b> ■ 42 X	<b>N2.2</b> ■ 37 X
<b>N2.3</b> ■ 27 X	<b>N3.1</b> ■ 44 X	<b>N3.2</b> ■ 25 X	<b>N3.3</b> ■ 13 X	<b>N4.1</b> ■ 44 S	<b>S1.1</b> ■ 30 V	<b>S1.2</b> ■ 20 W	<b>S1.3</b> ■ 15 W	<b>S2.1</b> ■ 20 W	<b>S2.2</b> ■ 14 S	<b>S3.1</b> ■ 15 W	<b>S3.2</b> ■ 10 S	<b>S4.1</b> ■ 12 W	<b>S4.2</b> ■ 8 S


Product	DC	CW	DCON MS	NOF
	(mm)	(mm)	(mm)	
D76363.0X1.6	63.00	1.6	22.00	32
D76363.0X2.0	63.00	2.0	22.00	32
D76380.0X3.0	80.00	3.0	27.00	32
D763100.0X2.0	100.00	2.0	32.00	44
D763125.0X3.0	125.00	3.0	32.00	44

# D400



## HSS-E Shell Cutter, Bright Finish

The standard bore sizes make it suitable for shell mill holders with a large diameter. Suitable for slotting and cutting. Bright finish.

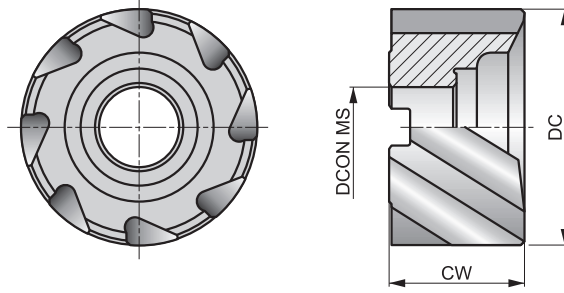

HSS-E	N	NOF 8
$\lambda$ 30°	$\gamma$ 12°	Bright
DC js16		DIN 1880




Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 40 C	<b>P1.2</b> ■ 45 C	<b>P1.3</b> ■ 46 C	<b>P2.1</b> ■ 34 C	<b>P2.2</b> ■ 30 C	<b>P2.3</b> ▧ 27 B	<b>P3.1</b> ■ 29 C	<b>P3.2</b> ■ 24 B	<b>P3.3</b> ▧ 20 B	<b>P4.1</b> ■ 18 B	<b>P4.2</b> ▧ 15 B	<b>P4.3</b> ▧ 12 B	<b>M1.1</b> ■ 34 C	<b>M1.2</b> ■ 29 C
<b>M2.1</b> ■ 31 C	<b>M2.2</b> ■ 25 B	<b>M3.1</b> ▧ 17 B	<b>M3.2</b> ▧ 15 B	<b>M3.3</b> ■ 14 A	<b>M4.1</b> ■ 10 A	<b>K1.1</b> ■ 20 C	<b>K1.2</b> ■ 15 C	<b>K1.3</b> ■ 11 C	<b>K2.1</b> ■ 37 C	<b>K2.2</b> ■ 30 C	<b>K2.3</b> ■ 24 B	<b>K3.1</b> ■ 33 C	<b>K3.2</b> ■ 25 C
<b>K3.3</b> ■ 20 A	<b>K4.1</b> ■ 30 B	<b>K4.2</b> ■ 23 B	<b>K4.3</b> ■ 17 B	<b>K4.4</b> ■ 14 A	<b>K4.5</b> ■ 12 A	<b>K5.1</b> ■ 34 B	<b>K5.2</b> ■ 26 B	<b>K5.3</b> ■ 20 B	<b>N1.1</b> ▧ 76 E	<b>N1.2</b> ▧ 57 D	<b>N1.3</b> ■ 38 D	<b>N2.1</b> ■ 38 C	<b>N2.2</b> ■ 34 C
<b>N2.3</b> ■ 25 C	<b>N3.1</b> ■ 40 C	<b>N3.2</b> ■ 23 C	<b>N3.3</b> ■ 12 C	<b>N4.1</b> ▧ 40 C	<b>N4.2</b> ▧ 15 C	<b>N4.3</b> ▧ 17 C	<b>S1.1</b> ■ 30 B	<b>S1.2</b> ▧ 20 B	<b>S1.3</b> ▧ 10 A	<b>S2.1</b> ▧ 13 A	<b>S2.2</b> ▧ 7 A	<b>S3.1</b> ▧ 10 A	<b>S3.2</b> ▧ 5 A
<b>S4.1</b> ▧ 8 A	<b>S4.2</b> ▧ 4 A												


Product	DC	CW	DCON MS	NOF
	(mm)	(mm)	(mm)	
D40040.0	40.00	32.0	16.00	8
D40050.0	50.00	36.0	22.00	8

# D420



## HSS-E Shell Cutter, TiCN Coating

The standard bore sizes make it suitable for standard shell mill holders and can be used for slotting and cutting. Available in a large range of sizes, with diameters up to 63 mm available. TiCN coating increases the life of the cutter and improves performance when milling hard and abrasive materials.

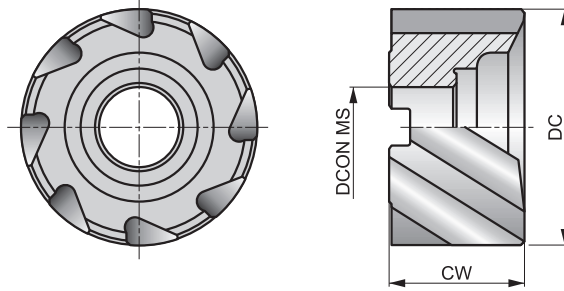

HSS-E	N	NOF 8
$\lambda$ 30°	$\gamma$ 12°	TiCN
DC js16		DIN 1880



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 86 C	<b>P1.2</b> ■ 96 C	<b>P1.3</b> ■ 100 C	<b>P2.1</b> ■ 74 C	<b>P2.2</b> ■ 65 C	<b>P2.3</b> ■ 57 B	<b>P3.1</b> ■ 52 C	<b>P3.2</b> ■ 42 B	<b>P3.3</b> ■ 35 B	<b>P4.1</b> ■ 31 B	<b>P4.2</b> ■ 26 B	<b>P4.3</b> ■ 21 B	<b>M1.1</b> ■ 48 C	<b>M1.2</b> ■ 41 C
<b>M2.1</b> ■ 43 C	<b>M2.2</b> ■ 35 B	<b>M3.1</b> ■ 35 B	<b>M3.2</b> ■ 30 B	<b>M3.3</b> ■ 27 A	<b>M4.1</b> ■ 20 A	<b>K1.1</b> ■ 35 C	<b>K1.2</b> ■ 26 C	<b>K1.3</b> ■ 19 C	<b>K2.1</b> ■ 62 C	<b>K2.2</b> ■ 50 C	<b>K2.3</b> ■ 40 B	<b>K3.1</b> ■ 54 C	<b>K3.2</b> ■ 42 C
<b>K3.3</b> ■ 34 A	<b>K4.1</b> ■ 50 B	<b>K4.2</b> ■ 38 B	<b>K4.3</b> ■ 28 B	<b>K4.4</b> ■ 24 A	<b>K4.5</b> ■ 20 A	<b>K5.1</b> ■ 57 B	<b>K5.2</b> ■ 43 B	<b>K5.3</b> ■ 33 B	<b>N1.1</b> ▧ 159 E	<b>N1.2</b> ▧ 120 D	<b>N1.3</b> ■ 80 D	<b>N2.1</b> ■ 80 C	<b>N2.2</b> ■ 72 C
<b>N2.3</b> ■ 51 C	<b>N3.1</b> ■ 84 C	<b>N3.2</b> ■ 50 C	<b>N3.3</b> ■ 25 C	<b>N4.1</b> ■ 84 C	<b>N4.2</b> ▧ 32 C	<b>N4.3</b> ▧ 35 C	<b>S1.1</b> ■ 35 B	<b>S1.2</b> ■ 25 B	<b>S1.3</b> ■ 15 A	<b>S2.1</b> ■ 27 A	<b>S2.2</b> ■ 14 A	<b>S3.1</b> ■ 20 A	<b>S3.2</b> ■ 10 A
<b>S4.1</b> ■ 16 A	<b>S4.2</b> ■ 8 A												



Product	DC (mm)	CW (mm)	DCON MS (mm)	NOF
D42063.0	63.00	40.0	27.00	8

# D402




## HSS-E Roughing Shell Mill Cutter, Bright Finish

Designed with a coarse pitch NR roughing profile, the tools are suitable for high metal removal roughing applications. The standard bore makes it possible to be used with standard shell end mill holders. Bright finish.



HSS-E	NR	NOF 8
$\lambda$ 30°	$\gamma$ 12°	Bright
DC js16		DIN 1880



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 261.

<b>P1.1</b> ■ 40 D	<b>P1.2</b> ■ 45 D	<b>P1.3</b> ■ 46 D	<b>P2.1</b> ■ 34 D	<b>P2.2</b> ■ 30 D	<b>P2.3</b> ▧ 27 C	<b>P3.1</b> ■ 29 D	<b>P3.2</b> ■ 24 C	<b>P3.3</b> ▧ 20 C	<b>P4.1</b> ■ 18 C	<b>P4.2</b> ▧ 15 C	<b>P4.3</b> ▧ 12 C	<b>M1.1</b> ■ 34 D	<b>M1.2</b> ■ 29 D
<b>M2.1</b> ■ 31 D	<b>M2.2</b> ■ 25 C	<b>M3.1</b> ▧ 17 C	<b>M3.2</b> ▧ 15 C	<b>M3.3</b> ■ 14 B	<b>M4.1</b> ■ 10 B	<b>K1.1</b> ■ 20 D	<b>K1.2</b> ■ 15 D	<b>K1.3</b> ■ 11 D	<b>K2.1</b> ■ 37 D	<b>K2.2</b> ■ 30 D	<b>K2.3</b> ■ 24 C	<b>K3.1</b> ■ 33 D	<b>K3.2</b> ■ 25 D
<b>K3.3</b> ■ 20 B	<b>K4.1</b> ■ 30 C	<b>K4.2</b> ■ 23 C	<b>K4.3</b> ■ 17 C	<b>K4.4</b> ■ 14 B	<b>K4.5</b> ■ 12 B	<b>K5.1</b> ■ 34 C	<b>K5.2</b> ■ 26 C	<b>K5.3</b> ■ 20 C	<b>N1.1</b> ▧ 76 F	<b>N1.2</b> ▧ 57 E	<b>N1.3</b> ■ 38 E	<b>N2.1</b> ■ 38 D	<b>N2.2</b> ■ 34 D
<b>N2.3</b> ■ 25 D	<b>N3.1</b> ■ 40 D	<b>N3.2</b> ■ 23 D	<b>N3.3</b> ■ 12 D	<b>N4.1</b> ▧ 40 D	<b>N4.2</b> ▧ 15 D	<b>N4.3</b> ▧ 17 D	<b>S1.1</b> ■ 30 C	<b>S1.2</b> ▧ 20 C	<b>S1.3</b> ▧ 10 B	<b>S2.1</b> ▧ 13 B	<b>S2.2</b> ▧ 7 B	<b>S3.1</b> ▧ 10 B	<b>S3.2</b> ▧ 5 B
<b>S4.1</b> ▧ 8 B	<b>S4.2</b> ▧ 4 B												

Product	DC (mm)	CW (mm)	DCON MS (mm)	NOF
D40263.0	63.00	40.0	27.00	8

Material code (BMC)	HM	HM	HM	HM	HM	HM	HM						
Mill Profile	N	N	N	N	N	N	N						
Number of flutes (NOF)	NOF 2	NOF 2	NOF 3	NOF 3	NOF 4	NOF 4	NOF 4						
Cut length													
Flute Helix (FHA)	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°						
Flute Helix (FHA)	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°						
Radial rake angle (GAMF)	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°	$\gamma$ 12°						
Shank	 DIN 6535HA	 DIN 6535HB	 DIN 6535HA	 DIN 6535HB	 DIN 6535HA	 DIN 6535HB	 DIN 6535HB						
Coating	Bright	TiAlN	Bright	TiAlN	Bright	TiAlN	TiAlN						
Cutting diameter tolerance class (TCDC)	DC h10	DC h10	DC h10	DC h10	DC h12	DC h12	DC h12						
Direction													
Basic standard group (BSG)													


Product Family Code	S902	S922	S903	S933	S904	S944	S991						
PSF cutting diameters range	2.00 – 20.00	2.00 – 20.00	2.00 – 20.00	2.00 – 20.00	2.00 – 20.00	2.00 – 20.00	Set						
	70	71	72	73	74	75	76						
<b>P</b>	P1	■	■	■	■	■							
	P2	■	■	■	■	■							
	P3	■	■	■	■	■							
	P4	▣	■	▣	■	▣	■						
<b>M</b>	M1												
	M2												
	M3												
	M4												
<b>K</b>	K1	▣	■	▣	■	▣	■						
	K2	■	■	■	■	■	■						
	K3	■	■	■	■	■	■						
	K4	▣	■	▣	■	▣	■						
	K5	■	■	■	■	■	■						
<b>N</b>	N1	▣	▣	▣	▣	▣	▣						
	N2	▣	■	▣	■	▣	■						
	N3	■	■	■	■	■	■						
	N4	▣	▣	▣	▣	▣	▣						
	N5												
<b>S</b>	S1	▣	▣	▣	▣	▣	▣						
	S2					▣	▣						
	S3					▣	▣						
	S4					▣	▣						
<b>H</b>	H1												
	H2												
	H3												
	H4												

# S902



## 2-Flute Solid Carbide End Mill

Medium cut length, 2-flute design with 30° helix provides high rigidity for milling standard slots.

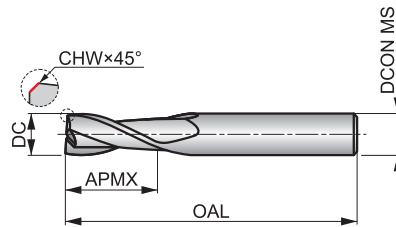

HM	N	NOF 2
	λ 30°	γ 12°
DIN 6535HA	Bright	DC h10



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 106 K	<b>P1.2</b> ■ 119 K	<b>P1.3</b> ■ 123 K	<b>P2.1</b> ■ 91 K	<b>P2.2</b> ■ 80 K	<b>P2.3</b> ▣ 71 J	<b>P3.1</b> ■ 66 K	<b>P3.2</b> ■ 53 J	<b>P3.3</b> ▣ 45 J	<b>P4.1</b> ■ 40 J	<b>P4.2</b> ▣ 34 J	<b>K1.1</b> ■ 80 K	<b>K1.2</b> ▣ 59 K	<b>K1.3</b> ▣ 44 K
<b>K2.1</b> ■ 98 K	<b>K2.2</b> ■ 80 K	<b>K2.3</b> ▣ 64 J	<b>K3.1</b> ■ 87 K	<b>K3.2</b> ■ 67 K	<b>K3.3</b> ▣ 54 J	<b>K4.1</b> ■ 81 J	<b>K4.2</b> ■ 61 J	<b>K4.3</b> ▣ 45 J	<b>K4.4</b> ▣ 38 J	<b>K4.5</b> ▣ 32 J	<b>K5.1</b> ■ 91 J	<b>K5.2</b> ■ 69 J	<b>K5.3</b> ▣ 53 J
<b>N1.1</b> ▣ 355 K	<b>N1.2</b> ■ 267 K	<b>N1.3</b> ■ 179 K	<b>N2.1</b> ■ 179 K	<b>N2.2</b> ▣ 160 K	<b>N2.3</b> ▣ 115 K	<b>N3.1</b> ■ 187 K	<b>N3.2</b> ■ 109 K	<b>N3.3</b> ■ 56 K	<b>N4.1</b> ▣ 187 K	<b>N4.2</b> ▣ 172 K	<b>S1.1</b> ■ 38 J	<b>S1.2</b> ▣ 36 J	<b>S1.3</b> ▣ 15 J

DCON MS tolerance h6; DC ≤ 10.00 mm: CHW ± 0.03 × 45° mm; DC > 10.00 mm: CHW ± 0.05 × 45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APM× (mm)	OAL (mm)	NOF
S9022.0	2.00	0.08	3.00	6.00	38.0	2
S9022.5	2.50	0.08	3.00	9.00	38.0	2
S9023.0	3.00	0.08	3.00	12.00	38.0	2
S9024.0	4.00	0.08	4.00	14.00	50.0	2
S9025.0	5.00	0.13	5.00	16.00	50.0	2
S9026.0	6.00	0.13	6.00	19.00	57.0	2
S9027.0	7.00	0.13	8.00	19.00	63.0	2
S9028.0	8.00	0.13	8.00	19.00	63.0	2
S9029.0	9.00	0.13	10.00	21.00	72.0	2
S90210.0	10.00	0.18	10.00	22.00	72.0	2
S90212.0	12.00	0.20	12.00	25.00	73.0	2
S90214.0	14.00	0.20	14.00	30.00	83.0	2
S90216.0	16.00	0.20	16.00	32.00	92.0	2
S90218.0	18.00	0.20	18.00	32.00	92.0	2
S90220.0	20.00	0.30	20.00	38.00	104.0	2

# S922



## 2-Flute Solid Carbide End Mill

Medium cut length, 2-flute design with 30° helix provides high rigidity for milling standard slots. Cylindrical shank for cutting diameter up to 5 mm. TiALN coating for higher temperature resistance and longer tool life.

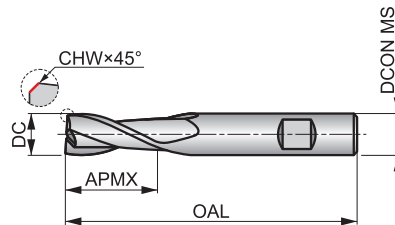

HM	N	NOF 2
	λ 30°	γ 12°
DIN 6535HB	TiALN	DC h10



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 132 K	<b>P1.2</b> ■ 148 K	<b>P1.3</b> ■ 153 K	<b>P2.1</b> ■ 113 K	<b>P2.2</b> ■ 100 K	<b>P2.3</b> ■ 88 J	<b>P3.1</b> ■ 98 K	<b>P3.2</b> ■ 79 J	<b>P3.3</b> ■ 67 J	<b>P4.1</b> ■ 59 J	<b>P4.2</b> ■ 50 J	<b>P4.3</b> ▣ 41 J	<b>K1.1</b> ■ 100 K	<b>K1.2</b> ■ 74 K
<b>K1.3</b> ■ 56 K	<b>K2.1</b> ■ 107 K	<b>K2.2</b> ■ 87 K	<b>K2.3</b> ■ 70 J	<b>K3.1</b> ■ 95 K	<b>K3.2</b> ■ 72 K	<b>K3.3</b> ■ 59 J	<b>K4.1</b> ■ 88 J	<b>K4.2</b> ■ 67 J	<b>K4.3</b> ■ 49 J	<b>K4.4</b> ■ 42 J	<b>K4.5</b> ■ 35 J	<b>K5.1</b> ■ 100 J	<b>K5.2</b> ■ 75 J
<b>K5.3</b> ■ 58 J	<b>N1.1</b> ▣ 296 K	<b>N1.2</b> ▣ 222 K	<b>N1.3</b> ■ 149 K	<b>N2.1</b> ■ 149 K	<b>N2.2</b> ■ 133 K	<b>N2.3</b> ■ 96 K	<b>N3.1</b> ■ 156 K	<b>N3.2</b> ■ 91 K	<b>N3.3</b> ▣ 47 K	<b>N4.1</b> ▣ 156 K	<b>N4.2</b> ▣ 60 K	<b>N4.3</b> ▣ 64 K	<b>S1.1</b> ■ 47 J
<b>S1.2</b> ▣ 45 J	<b>S1.3</b> ▣ 20 J												

DCON MS tolerance h6; DC ≤ 10.00 mm: CHW ± 0.03 × 45° mm; DC > 10.00 mm: CHW ± 0.05 × 45° mm.  
Products from this series are also available in set. Please see S991.

Product	DC (mm)	CHW (mm)	DCON MS (mm)	APM× (mm)	OAL (mm)	NOF
S9222.0 <sup>1)</sup>	2.00	0.08	3.00	6.00	38.0	2
S9222.5 <sup>1)</sup>	2.50	0.08	3.00	9.00	38.0	2
S9223.0 <sup>1)</sup>	3.00	0.08	3.00	12.00	38.0	2
S9224.0 <sup>1)</sup>	4.00	0.08	4.00	14.00	50.0	2
S9225.0 <sup>1)</sup>	5.00	0.13	5.00	16.00	50.0	2
S9226.0	6.00	0.13	6.00	19.00	57.0	2
S9227.0	7.00	0.13	8.00	19.00	63.0	2
S9228.0	8.00	0.13	8.00	19.00	63.0	2
S9229.0	9.00	0.13	10.00	21.00	72.0	2
S92210.0	10.00	0.18	10.00	22.00	72.0	2
S92212.0	12.00	0.20	12.00	25.00	73.0	2
S92214.0	14.00	0.20	14.00	30.00	83.0	2
S92216.0	16.00	0.20	16.00	32.00	92.0	2
S92218.0	18.00	0.20	18.00	32.00	92.0	2
S92220.0	20.00	0.30	20.00	38.00	104.0	2


<sup>1)</sup> Cylindrical shank.

# S903



## 3-Flute Solid Carbide End Mill

Medium cut length, 3-flute design with 30° helix and provides high rigidity for milling standard slots.

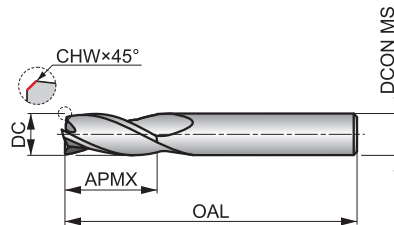

HM	N	NOF 3
	λ 30°	γ 12°
DIN 6535HA	Bright	DC h10



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 106 J	<b>P1.2</b> ■ 119 J	<b>P1.3</b> ■ 123 J	<b>P2.1</b> ■ 91 J	<b>P2.2</b> ■ 80 J	<b>P2.3</b> ▣ 71 I	<b>P3.1</b> ■ 66 J	<b>P3.2</b> ■ 53 I	<b>P3.3</b> ▣ 45 I	<b>P4.1</b> ■ 40 I	<b>P4.2</b> ▣ 34 I	<b>K1.1</b> ■ 80 J	<b>K1.2</b> ▣ 59 J	<b>K1.3</b> ▣ 44 J
<b>K2.1</b> ■ 98 J	<b>K2.2</b> ■ 80 J	<b>K2.3</b> ▣ 64 I	<b>K3.1</b> ■ 87 J	<b>K3.2</b> ■ 67 J	<b>K3.3</b> ▣ 54 I	<b>K4.1</b> ■ 81 I	<b>K4.2</b> ■ 61 I	<b>K4.3</b> ▣ 45 I	<b>K4.4</b> ▣ 38 I	<b>K4.5</b> ▣ 32 I	<b>K5.1</b> ■ 91 I	<b>K5.2</b> ■ 69 I	<b>K5.3</b> ▣ 53 I
<b>N1.1</b> ▣ 355 K	<b>N1.2</b> ■ 267 K	<b>N1.3</b> ■ 179 K	<b>N2.1</b> ■ 179 J	<b>N2.2</b> ▣ 160 J	<b>N2.3</b> ▣ 115 J	<b>N3.1</b> ■ 187 J	<b>N3.2</b> ■ 109 J	<b>N3.3</b> ■ 56 J	<b>N4.1</b> ▣ 187 J	<b>N4.2</b> ▣ 172 J	<b>S1.1</b> ■ 38 I	<b>S1.2</b> ▣ 36 I	<b>S1.3</b> ▣ 43 I

DCON MS tolerance h6; DC ≤ 9.00 mm: CHW ± 0.03 × 45° mm; DC > 9.00 mm: CHW ± 0.05 × 45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APM× (mm)	OAL (mm)	NOF
S9032.0	2.00	0.08	3.00	6.00	38.0	3
S9032.5	2.50	0.08	3.00	9.00	38.0	3
S9033.0	3.00	0.08	3.00	12.00	38.0	3
S9034.0	4.00	0.08	4.00	14.00	50.0	3
S9035.0	5.00	0.13	5.00	16.00	50.0	3
S9036.0	6.00	0.13	6.00	19.00	57.0	3
S9037.0	7.00	0.13	8.00	19.00	63.0	3
S9038.0	8.00	0.13	8.00	19.00	63.0	3
S9039.0	9.00	0.13	10.00	21.00	72.0	3
S90310.0	10.00	0.20	10.00	22.00	72.0	3
S90312.0	12.00	0.20	12.00	25.00	73.0	3
S90314.0	14.00	0.20	14.00	30.00	83.0	3
S90316.0	16.00	0.20	16.00	32.00	92.0	3
S90318.0	18.00	0.20	18.00	32.00	92.0	3
S90320.0	20.00	0.30	20.00	38.00	104.0	3

# S933



## 3-Flute Solid Carbide End Mill

Medium cut length, 3-flute design with 30° helix provides high rigidity for milling standard slots. Cylindrical shank for cutting diameter up to 5 mm. TiALN coating for higher temperature resistance and longer tool life.

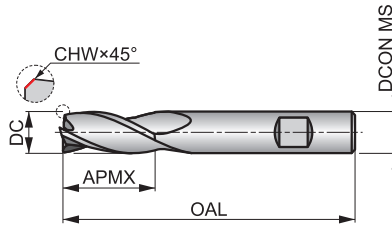

HM	N	NOF 3
	λ 30°	γ 12°
DIN 6535HB	TiALN	DC h10



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 132 J	<b>P1.2</b> ■ 148 J	<b>P1.3</b> ■ 153 J	<b>P2.1</b> ■ 113 J	<b>P2.2</b> ■ 100 J	<b>P2.3</b> ■ 88 I	<b>P3.1</b> ■ 98 J	<b>P3.2</b> ■ 79 I	<b>P3.3</b> ■ 67 I	<b>P4.1</b> ■ 59 I	<b>P4.2</b> ■ 50 I	<b>P4.3</b> ▣ 41 I	<b>K1.1</b> ■ 100 J	<b>K1.2</b> ■ 74 J
<b>K1.3</b> ■ 56 J	<b>K2.1</b> ■ 107 J	<b>K2.2</b> ■ 87 J	<b>K2.3</b> ■ 70 I	<b>K3.1</b> ■ 95 J	<b>K3.2</b> ■ 72 J	<b>K3.3</b> ■ 59 I	<b>K4.1</b> ■ 88 I	<b>K4.2</b> ■ 67 I	<b>K4.3</b> ■ 49 I	<b>K4.4</b> ■ 42 I	<b>K4.5</b> ■ 35 I	<b>K5.1</b> ■ 100 I	<b>K5.2</b> ■ 75 I
<b>K5.3</b> ■ 58 I	<b>N1.1</b> ▣ 296 K	<b>N1.2</b> ▣ 222 K	<b>N1.3</b> ■ 149 K	<b>N2.1</b> ■ 149 J	<b>N2.2</b> ■ 133 J	<b>N2.3</b> ■ 96 J	<b>N3.1</b> ■ 156 J	<b>N3.2</b> ■ 91 J	<b>N3.3</b> ▣ 47 J	<b>N4.1</b> ▣ 156 J	<b>N4.2</b> ▣ 60 J	<b>N4.3</b> ▣ 64 J	<b>S1.1</b> ■ 47 I
<b>S1.2</b> ▣ 45 I	<b>S1.3</b> ▣ 20 I												

DCON MS tolerance h6; DC ≤ 9.00 mm: CHW ± 0.03 × 45° mm; DC > 9.00 mm: CHW ± 0.05 × 45° mm.  
Products from this series are also available in set. Please see S991.

Product	DC (mm)	CHW (mm)	DCON MS (mm)	APM× (mm)	OAL (mm)	NOF
S9332.0 <sup>1)</sup>	2.00	0.08	3.00	6.00	38.0	3
S9332.5 <sup>1)</sup>	2.50	0.08	3.00	9.00	38.0	3
S9333.0 <sup>1)</sup>	3.00	0.08	3.00	12.00	38.0	3
S9334.0 <sup>1)</sup>	4.00	0.08	4.00	14.00	50.0	3
S9335.0 <sup>1)</sup>	5.00	0.13	5.00	16.00	50.0	3
S9336.0	6.00	0.13	6.00	19.00	57.0	3
S9337.0	7.00	0.13	8.00	19.00	63.0	3
S9338.0	8.00	0.13	8.00	19.00	63.0	3
S9339.0	9.00	0.13	10.00	21.00	72.0	3
S93310.0	10.00	0.20	10.00	22.00	72.0	3
S93312.0	12.00	0.20	12.00	25.00	73.0	3
S93314.0	14.00	0.20	14.00	30.00	83.0	3
S93316.0	16.00	0.20	16.00	32.00	92.0	3
S93318.0	18.00	0.20	18.00	32.00	92.0	3
S93320.0	20.00	0.30	20.00	38.00	104.0	3


<sup>1)</sup> Cylindrical shank.

# S904



## 4-Flute Solid Carbide End Mill

Medium cut length, 4-flute design with 30° helix provides high rigidity for milling standard slots.

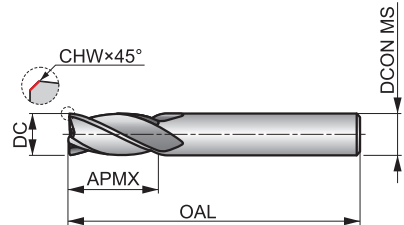

HM	N	NOF 4
	λ 30°	γ 12°
DIN 6535HA	Bright	DC h12



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 106 J	<b>P1.2</b> ■ 119 J	<b>P1.3</b> ■ 123 J	<b>P2.1</b> ■ 91 J	<b>P2.2</b> ■ 80 J	<b>P2.3</b> ▣ 71 I	<b>P3.1</b> ■ 66 J	<b>P3.2</b> ■ 53 I	<b>P3.3</b> ▣ 45 I	<b>P4.1</b> ■ 40 I	<b>P4.2</b> ▣ 34 I	<b>P4.3</b> ▣ 18 I	<b>K1.1</b> ■ 80 J	<b>K1.2</b> ▣ 59 J
<b>K1.3</b> ▣ 44 J	<b>K2.1</b> ■ 98 J	<b>K2.2</b> ■ 80 J	<b>K2.3</b> ▣ 64 I	<b>K3.1</b> ■ 87 J	<b>K3.2</b> ■ 67 J	<b>K3.3</b> ▣ 54 I	<b>K4.1</b> ■ 81 I	<b>K4.2</b> ■ 61 I	<b>K4.3</b> ▣ 45 I	<b>K4.4</b> ▣ 38 I	<b>K4.5</b> ▣ 32 I	<b>K5.1</b> ■ 91 I	<b>K5.2</b> ■ 69 I
<b>K5.3</b> ▣ 53 I	<b>N1.1</b> ▣ 355 J	<b>N1.2</b> ■ 267 J	<b>N1.3</b> ■ 179 J	<b>N2.1</b> ■ 179 J	<b>N2.2</b> ▣ 160 J	<b>N2.3</b> ▣ 115 J	<b>N3.1</b> ■ 187 J	<b>N3.2</b> ■ 109 J	<b>N3.3</b> ■ 56 J	<b>N4.1</b> ▣ 187 J	<b>N4.2</b> ▣ 72 J	<b>S1.1</b> ■ 38 I	<b>S1.2</b> ▣ 36 I
<b>S1.3</b> ▣ 43 I	<b>S2.1</b> ▣ 40 I	<b>S2.2</b> ▣ 35 I	<b>S3.1</b> ▣ 30 I	<b>S3.2</b> ▣ 25 I	<b>S4.1</b> ▣ 23 I	<b>S4.2</b> ▣ 20 I							

DCON MS tolerance h6; DC ≤ 9.00 mm: CHW ± 0.03 × 45° mm; DC > 9.00 mm: CHW ± 0.05 × 45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APM× (mm)	OAL (mm)	NOF
S9042.0	2.00	0.08	3.00	6.00	38.0	4
S9042.5	2.50	0.08	3.00	9.00	38.0	4
S9043.0	3.00	0.08	3.00	12.00	38.0	4
S9044.0	4.00	0.08	4.00	14.00	50.0	4
S9045.0	5.00	0.13	5.00	16.00	50.0	4
S9046.0	6.00	0.13	6.00	19.00	57.0	4
S9047.0	7.00	0.13	8.00	19.00	63.0	4
S9048.0	8.00	0.13	8.00	19.00	63.0	4
S9049.0	9.00	0.13	10.00	21.00	72.0	4
S90410.0	10.00	0.20	10.00	22.00	72.0	4
S90412.0	12.00	0.20	12.00	25.00	73.0	4
S90414.0	14.00	0.20	14.00	30.00	83.0	4
S90416.0	16.00	0.20	16.00	32.00	92.0	4
S90418.0	18.00	0.20	18.00	32.00	92.0	4
S90420.0	20.00	0.30	20.00	38.00	104.0	4

# S944



## 4-Flute Solid Carbide End Mill

Medium cut length, 4-flute design with 30° helix provides high rigidity for milling standard slots. Cylindrical shank for cutting diameter up to 5 mm. TiALN coating for higher temperature resistance and longer tool life.

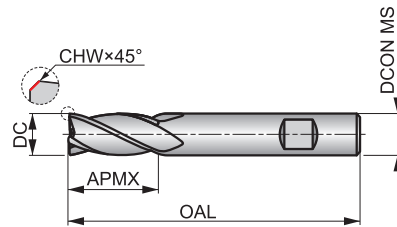

HM	N	NOF 4
	λ 30°	γ 12°
DIN 6358B	TiALN	DC h12
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 132 J	<b>P1.2</b> ■ 148 J	<b>P1.3</b> ■ 153 J	<b>P2.1</b> ■ 113 J	<b>P2.2</b> ■ 100 J	<b>P2.3</b> ■ 88 l	<b>P3.1</b> ■ 98 J	<b>P3.2</b> ■ 79 l	<b>P3.3</b> ■ 67 l	<b>P4.1</b> ■ 59 l	<b>P4.2</b> ■ 50 l	<b>P4.3</b> ▣ 41 l	<b>K1.1</b> ■ 100 J	<b>K1.2</b> ■ 74 J
<b>K1.3</b> ■ 56 J	<b>K2.1</b> ■ 107 J	<b>K2.2</b> ■ 87 J	<b>K2.3</b> ■ 70 l	<b>K3.1</b> ■ 95 J	<b>K3.2</b> ■ 72 J	<b>K3.3</b> ■ 59 l	<b>K4.1</b> ■ 88 l	<b>K4.2</b> ■ 67 l	<b>K4.3</b> ■ 49 l	<b>K4.4</b> ■ 42 l	<b>K4.5</b> ■ 35 l	<b>K5.1</b> ■ 100 l	<b>K5.2</b> ■ 75 l
<b>K5.3</b> ■ 58 l	<b>N1.1</b> ▣ 296 J	<b>N1.2</b> ▣ 222 J	<b>N1.3</b> ■ 149 J	<b>N2.1</b> ■ 149 J	<b>N2.2</b> ■ 133 J	<b>N2.3</b> ■ 96 J	<b>N3.1</b> ■ 156 J	<b>N3.2</b> ■ 91 J	<b>N3.3</b> ▣ 47 J	<b>N4.1</b> ▣ 156 J	<b>N4.2</b> ▣ 60 J	<b>N4.3</b> ▣ 64 J	<b>S1.1</b> ■ 47 l
<b>S1.2</b> ▣ 45 l	<b>S1.3</b> ▣ 45 l	<b>S2.1</b> ▣ 60 l	<b>S2.2</b> ▣ 49 l	<b>S3.1</b> ▣ 45 l	<b>S3.2</b> ▣ 35 l	<b>S4.1</b> ▣ 35 l	<b>S4.2</b> ▣ 28 l						

DCON MS tolerance h6; DC ≤ 9.00 mm: CHW ± 0.03 × 45° mm; DC > 9.00 mm: CHW ± 0.05 × 45° mm.  
Products from this series are also available in set. Please see S991.

Product	DC (mm)	CHW (mm)	DCON MS (mm)	APM× (mm)	OAL (mm)	NOF
S9442.0 <sup>1)</sup>	2.00	0.08	3.00	6.00	38.0	4
S9442.5 <sup>1)</sup>	2.50	0.08	3.00	9.00	38.0	4
S9443.0 <sup>1)</sup>	3.00	0.08	3.00	12.00	38.0	4
S9444.0 <sup>1)</sup>	4.00	0.08	4.00	14.00	50.0	4
S9445.0 <sup>1)</sup>	5.00	0.13	5.00	16.00	50.0	4
S9446.0	6.00	0.13	6.00	19.00	57.0	4
S9447.0	7.00	0.13	8.00	19.00	63.0	4
S9448.0	8.00	0.13	8.00	19.00	63.0	4
S9449.0	9.00	0.13	10.00	21.00	72.0	4
S94410.0	10.00	0.20	10.00	22.00	72.0	4
S94412.0	12.00	0.20	12.00	25.00	73.0	4
S94414.0	14.00	0.20	14.00	30.00	83.0	4
S94416.0	16.00	0.20	16.00	32.00	92.0	4
S94418.0	18.00	0.20	18.00	32.00	92.0	4
S94420.0	20.00	0.30	20.00	38.00	104.0	4

<sup>1)</sup> Cylindrical shank.



S991



### Set of Solid Carbide End Mills

Sets of solid carbide End Mills with TiALN coating. Range of S922, S933 or S944 (2, 3 or 4 flute). Sets contain Ø3, 4, 5, 6, 8 and 10 mm. Carried in a plastic container for good overview.

HM		

A = Styles in Set, B = No. in Set, C = Diameters in Set.

Product	A	B	C
S991SET922	S922	6	Ø 3.00 mm, 4.00 mm, 5.00 mm, 6.00 mm, 8.00 mm, 10.00 mm
S991SET933	S933	6	Ø 3.00 mm, 4.00 mm, 5.00 mm, 6.00 mm, 8.00 mm, 10.00 mm
S991SET944	S944	6	Ø 3.00 mm, 4.00 mm, 5.00 mm, 6.00 mm, 8.00 mm, 10.00 mm



PMK  
NSH



**SOLID CARBIDE TOOLS FOR MIXED MANUFACTURING.  
SUITABLE FOR MODERATE CUTTING PARAMETERS.**

---

Material code (BMC)	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM
Mill Profile	N	N	N	N	N	N	N	N	N	N	N	N	N	N
Number of flutes (NOF)	NOF 2	NOF 2	NOF 2	NOF 2	NOF 2	NOF 2	NOF 3	NOF 3	NOF 3	NOF 3	NOF 3	NOF 3	NOF 3	NOF 3
Cut length														
Flute Helix (FHA)	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 40°	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 40°	$\lambda$ 28°	$\lambda$ 40°	$\lambda$ 40°
Flute Helix (FHA)	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 40°	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 28°	$\lambda$ 40°	$\lambda$ 28°	$\lambda$ 40°	$\lambda$ 40°
Radial rake angle (GAMF)	$\gamma$ 9°	$\gamma$ 9°	$\gamma$ 9°	$\gamma$ 9°	$\gamma$ 10°	$\gamma$ 9°	$\gamma$ 9°	$\gamma$ 9°	$\gamma$ 9°	$\gamma$ 9°	$\gamma$ 10°	$\gamma$ 9°	$\gamma$ 10°	$\gamma$ 10°
Shank	DIN 6535HA	DIN 6535HB	DIN 6535HA	DIN 6535HB	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HB	DIN 6535HA	DIN 6535HB	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA
Coating	AlCrN	AlCrN	AlCrN	AlCrN	AlCrN	AlCrN	AlCrN	AlCrN	AlCrN	AlCrN	AlCrN	AlCrN	AlCrN	AlCrN
Cutting diameter tolerance class (TDC)	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9
Direction														
Basic standard group (BSG)	DIN 6527K	DIN 6527K	DIN 6527L	DIN 6527L	DORMER	DORMER	DIN 6527K	DIN 6527K	DIN 6527L	DIN 6527L	DORMER	DORMER	DORMER	DORMER
Product Family Code	S802HA	S802HB	S812HA	S812HB	S710	S822	S803HA	S803HB	S813HA	S813HB	S713	S823	S714	S715
PSF cutting diameters range	1.00 – 20.00	2.00 – 20.00	2.00 – 20.00	2.00 – 20.00	1.00 – 20.00	2.00 – 20.00	1.00 – 20.00	2.00 – 20.00	2.00 – 20.00	2.00 – 20.00	1.50 – 20.00	2.00 – 20.00	3.00 – 20.00	3.00 – 20.00
P	P1	■	■	■	■	■	■	■	■	■	■	■	■	■
	P2	■	■	■	■	■	■	■	■	■	■	■	■	■
	P3	■	■	■	■	■	■	■	■	■	■	■	■	■
	P4	■	■	■	■	■	■	■	■	■	■	■	■	■
M	M1	■	■	■	■	■	■	■	■	■	■	■	■	■
	M2	■	■	■	■	■	■	■	■	■	■	■	■	■
	M3	■	■	■	■	■	■	■	■	■	■	■	■	■
	M4	■	■	■	■	■	■	■	■	■	■	■	■	■
K	K1	■	■	■	■	■	■	■	■	■	■	■	■	■
	K2	■	■	■	■	■	■	■	■	■	■	■	■	■
	K3	■	■	■	■	■	■	■	■	■	■	■	■	■
	K4	■	■	■	■	■	■	■	■	■	■	■	■	■
	K5	■	■	■	■	■	■	■	■	■	■	■	■	■
N	N1	■	■	■	■	■	■	■	■	■	■	■	■	■
	N2	■	■	■	■	■	■	■	■	■	■	■	■	■
	N3	■	■	■	■	■	■	■	■	■	■	■	■	■
	N4	■	■	■	■	■	■	■	■	■	■	■	■	■
	N5	■	■	■	■	■	■	■	■	■	■	■	■	■
S	S1	■	■	■	■	■	■	■	■	■	■	■	■	■
	S2	■	■	■	■	■	■	■	■	■	■	■	■	■
	S3	■	■	■	■	■	■	■	■	■	■	■	■	■
	S4	■	■	■	■	■	■	■	■	■	■	■	■	■
H	H1													
	H2													
	H3													
	H4													


# S802HA



## 2-Flute Solid Carbide Slot End Mill, DIN 6535 HA Shank

Extra short cut length, 2-flute design provides high rigidity for milling shallow slots to a P9 tolerance and ramping operation. AlCrN coating improves performance and extends the tool life.

HM	N	NOF 2
	$\lambda$ 28°	$\gamma$ 9°
DIN 6535HA	AlCrN	
DIN 6527K		

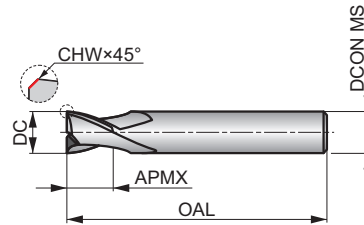

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 206 K	<b>P1.2</b> ■ 230 K	<b>P1.3</b> ■ 238 K	<b>P2.1</b> ■ 176 K	<b>P2.2</b> ■ 155 K	<b>P2.3</b> ■ 137 J	<b>P3.1</b> ■ 143 K	<b>P3.2</b> ■ 114 J	<b>P3.3</b> ■ 97 J	<b>P4.1</b> ■ 84 J	<b>P4.2</b> ■ 72 J	<b>P4.3</b> ■ 58 J	<b>M1.1</b> ■ 121 K	<b>M1.2</b> ■ 102 K
<b>M2.1</b> ■ 107 K	<b>M2.2</b> ■ 89 J	<b>M2.3</b> ▣ 75 J	<b>M3.1</b> ■ 99 J	<b>M3.2</b> ■ 85 J	<b>M3.3</b> ▣ 76 J	<b>M4.1</b> ▣ 75 J	<b>M4.2</b> ▣ 63 J	<b>K1.1</b> ■ 205 K	<b>K1.2</b> ■ 152 K	<b>K1.3</b> ■ 114 K	<b>K2.1</b> ■ 210 K	<b>K2.2</b> ■ 171 K	<b>K2.3</b> ■ 137 J
<b>K3.1</b> ■ 186 K	<b>K3.2</b> ■ 143 K	<b>K3.3</b> ■ 115 J	<b>K4.1</b> ■ 173 J	<b>K4.2</b> ■ 131 J	<b>K4.3</b> ■ 95 J	<b>K4.4</b> ■ 82 J	<b>K4.5</b> ■ 68 J	<b>K5.1</b> ■ 196 J	<b>K5.2</b> ■ 147 J	<b>K5.3</b> ■ 114 J	<b>N1.1</b> ▣ 408 K	<b>N1.2</b> ▣ 307 K	<b>N1.3</b> ■ 206 K
<b>N2.1</b> ■ 206 K	<b>N2.2</b> ■ 184 K	<b>N2.3</b> ■ 132 K	<b>N3.1</b> ■ 215 K	<b>N3.2</b> ■ 125 K	<b>N3.3</b> ▣ 64 K	<b>N4.1</b> ▣ 215 K	<b>N4.2</b> ▣ 83 K	<b>S1.1</b> ▣ 81 J	<b>S1.2</b> ▣ 71 J	<b>S2.1</b> ▣ 55 J	<b>S3.1</b> ▣ 41 J	<b>S4.1</b> ▣ 32 J	

DCON MS tolerance h6; DC ≤ 7.75 mm: CHW ±0.03×45° mm; DC > 7.75 mm: CHW ±0.05×45° mm.

Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S802HA1.0	1.00	–	3.00	3.00	38.0	2
S802HA1.5	1.50	–	3.00	3.00	38.0	2
S802HA2.0	2.00	–	6.00	3.00	50.0	2
S802HA2.5	2.50	0.08	6.00	3.00	50.0	2
S802HA3.0	3.00	0.08	6.00	4.00	50.0	2
S802HA3.5	3.50	0.08	6.00	4.00	50.0	2
S802HA4.0	4.00	0.13	6.00	5.00	54.0	2
S802HA4.5	4.50	0.13	6.00	5.00	54.0	2
S802HA5.0	5.00	0.13	6.00	6.00	54.0	2
S802HA6.0	6.00	0.13	6.00	7.00	54.0	2
S802HA7.0	7.00	0.13	8.00	8.00	58.0	2
S802HA8.0	8.00	0.20	8.00	9.00	58.0	2
S802HA9.0	9.00	0.20	10.00	10.00	66.0	2
S802HA10.0	10.00	0.20	10.00	11.00	66.0	2
S802HA12.0	12.00	0.20	12.00	12.00	73.0	2
S802HA14.0	14.00	0.20	14.00	14.00	75.0	2
S802HA16.0	16.00	0.20	16.00	16.00	82.0	2
S802HA18.0	18.00	0.20	18.00	18.00	84.0	2
S802HA20.0	20.00	0.30	20.00	20.00	92.0	2


# S802HB



## 2-Flute Solid Carbide Slot End Mill, DIN 6535 HB Shank

Extra short cut length, 2-flute design provides high rigidity for milling shallow slots to a P9 tolerance and ramping operation. The Weldon shank prevents the end mill from slipping in the toolholder. AlCrN coating improves performance and extends the tool life.

HM	N	NOF 2
	$\lambda$ 28°	$\gamma$ 9°
DIN 6527K		

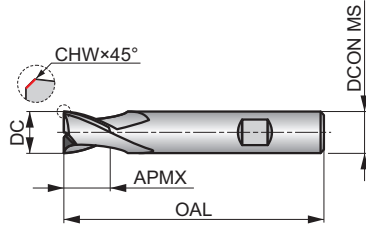

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 206 K	<b>P1.2</b> ■ 230 K	<b>P1.3</b> ■ 238 K	<b>P2.1</b> ■ 176 K	<b>P2.2</b> ■ 155 K	<b>P2.3</b> ■ 137 J	<b>P3.1</b> ■ 143 K	<b>P3.2</b> ■ 114 J	<b>P3.3</b> ■ 97 J	<b>P4.1</b> ■ 84 J	<b>P4.2</b> ■ 72 J	<b>P4.3</b> ■ 58 J	<b>M1.1</b> ■ 121 K	<b>M1.2</b> ■ 102 K
<b>M2.1</b> ■ 107 K	<b>M2.2</b> ■ 89 J	<b>M2.3</b> ▣ 75 J	<b>M3.1</b> ■ 99 J	<b>M3.2</b> ■ 85 J	<b>M3.3</b> ▣ 76 J	<b>M4.1</b> ▣ 75 J	<b>M4.2</b> ▣ 63 J	<b>K1.1</b> ■ 205 K	<b>K1.2</b> ■ 152 K	<b>K1.3</b> ■ 114 K	<b>K2.1</b> ■ 210 K	<b>K2.2</b> ■ 171 K	<b>K2.3</b> ■ 137 J
<b>K3.1</b> ■ 186 K	<b>K3.2</b> ■ 143 K	<b>K3.3</b> ■ 115 J	<b>K4.1</b> ■ 173 J	<b>K4.2</b> ■ 131 J	<b>K4.3</b> ■ 95 J	<b>K4.4</b> ■ 82 J	<b>K4.5</b> ■ 68 J	<b>K5.1</b> ■ 196 J	<b>K5.2</b> ■ 147 J	<b>K5.3</b> ■ 114 J	<b>N1.1</b> ▣ 408 K	<b>N1.2</b> ▣ 307 K	<b>N1.3</b> ■ 206 K
<b>N2.1</b> ■ 206 K	<b>N2.2</b> ■ 184 K	<b>N2.3</b> ■ 132 K	<b>N3.1</b> ■ 215 K	<b>N3.2</b> ■ 125 K	<b>N3.3</b> ▣ 64 K	<b>N4.1</b> ▣ 215 K	<b>N4.2</b> ▣ 83 K	<b>S1.1</b> ▣ 81 J	<b>S1.2</b> ▣ 71 J	<b>S2.1</b> ▣ 55 J	<b>S3.1</b> ▣ 41 J	<b>S4.1</b> ▣ 32 J	

DCON MS tolerance h6; DC ≤ 7.75 mm: CHW ±0.03×45° mm; DC > 7.75 mm: CHW ±0.05×45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S802HB2.0	2.00	—	6.00	3.00	50.0	2
S802HB2.5	2.50	0.08	6.00	3.00	50.0	2
S802HB3.0	3.00	0.08	6.00	4.00	50.0	2
S802HB3.5	3.50	0.08	6.00	4.00	50.0	2
S802HB4.0	4.00	0.13	6.00	5.00	54.0	2
S802HB4.5	4.50	0.13	6.00	5.00	54.0	2
S802HB5.0	5.00	0.13	6.00	6.00	54.0	2
S802HB6.0	6.00	0.13	6.00	7.00	54.0	2
S802HB7.0	7.00	0.13	8.00	8.00	58.0	2
S802HB8.0	8.00	0.20	8.00	9.00	58.0	2
S802HB9.0	9.00	0.20	10.00	10.00	66.0	2
S802HB10.0	10.00	0.20	10.00	11.00	66.0	2
S802HB12.0	12.00	0.20	12.00	12.00	73.0	2
S802HB14.0	14.00	0.20	14.00	14.00	75.0	2
S802HB16.0	16.00	0.20	16.00	16.00	82.0	2
S802HB18.0	18.00	0.20	18.00	18.00	84.0	2
S802HB20.0	20.00	0.30	20.00	20.00	92.0	2

# S812HA



## 2-Flute Solid Carbide Slot End Mill, DIN 6535 HA Shank

Short cut length, 2-flute design provides high rigidity for milling standard slots to a P9 tolerance and ramping operation. AlCrN coating improves performance and extends the tool life.

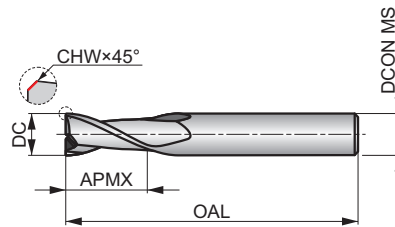

HM	N	NOF 2
	$\lambda$ 28°	$\gamma$ 9°
DIN 6535HA	AlCrN	
DIN 6527L		



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 166 K	<b>P1.2</b> ■ 186 K	<b>P1.3</b> ■ 192 K	<b>P2.1</b> ■ 142 K	<b>P2.2</b> ■ 125 K	<b>P2.3</b> ■ 111 J	<b>P3.1</b> ■ 115 K	<b>P3.2</b> ■ 93 J	<b>P3.3</b> ■ 78 J	<b>P4.1</b> ■ 68 J	<b>P4.2</b> ■ 59 J	<b>P4.3</b> ■ 47 J	<b>M1.1</b> ■ 97 K	<b>M1.2</b> ■ 81 K
<b>M2.1</b> ■ 85 K	<b>M2.2</b> ■ 71 J	<b>M3.1</b> ■ 79 J	<b>M3.2</b> ■ 68 J	<b>M3.3</b> ■ 61 J	<b>M4.1</b> ■ 60 J	<b>K1.1</b> ■ 166 K	<b>K1.2</b> ■ 123 K	<b>K1.3</b> ■ 92 K	<b>K2.1</b> ■ 170 K	<b>K2.2</b> ■ 138 K	<b>K2.3</b> ■ 110 J	<b>K3.1</b> ■ 150 K	<b>K3.2</b> ■ 115 K
<b>K3.3</b> ■ 93 J	<b>K4.1</b> ■ 140 J	<b>K4.2</b> ■ 105 J	<b>K4.3</b> ■ 77 J	<b>K4.4</b> ■ 66 J	<b>K4.5</b> ■ 56 J	<b>K5.1</b> ■ 159 J	<b>K5.2</b> ■ 118 J	<b>K5.3</b> ■ 92 J	<b>N1.1</b> ▣ 330 K	<b>N1.2</b> ▣ 247 K	<b>N1.3</b> ■ 166 K	<b>N2.1</b> ■ 166 K	<b>N2.2</b> ■ 148 K
<b>N2.3</b> ■ 107 K	<b>N3.1</b> ■ 173 K	<b>N3.2</b> ■ 101 K	<b>N3.3</b> ▣ 52 K	<b>N4.1</b> ▣ 173 K	<b>N4.2</b> ▣ 67 K	<b>S1.1</b> ■ 72 J	<b>S1.2</b> ■ 64 J	<b>S2.1</b> ■ 49 J	<b>S3.1</b> ■ 38 J	<b>S4.1</b> ■ 30 J			

DCON MS tolerance h6; DC ≤ 7.00 mm: CHW ±0.03×45° mm; DC > 7.00 mm: CHW ±0.05×45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S812HA2.0	2.00	—	6.00	6.00	57.0	2
S812HA2.5	2.50	0.08	6.00	7.00	57.0	2
S812HA3.0	3.00	0.08	6.00	7.00	57.0	2
S812HA3.5	3.50	0.08	6.00	7.00	57.0	2
S812HA4.0	4.00	0.13	6.00	8.00	57.0	2
S812HA4.5	4.50	0.13	6.00	8.00	57.0	2
S812HA5.0	5.00	0.13	6.00	10.00	57.0	2
S812HA6.0	6.00	0.13	6.00	10.00	57.0	2
S812HA7.0	7.00	0.13	8.00	13.00	63.0	2
S812HA8.0	8.00	0.20	8.00	16.00	63.0	2
S812HA9.0	9.00	0.20	10.00	16.00	72.0	2
S812HA10.0	10.00	0.20	10.00	19.00	72.0	2
S812HA12.0	12.00	0.20	12.00	22.00	83.0	2
S812HA14.0	14.00	0.20	14.00	22.00	83.0	2
S812HA16.0	16.00	0.20	16.00	26.00	92.0	2
S812HA18.0	18.00	0.20	18.00	26.00	92.0	2
S812HA20.0	20.00	0.30	20.00	32.00	104.0	2

# S812HB



## 2-Flute Solid Carbide Slot End Mill, DIN 6535 HB Shank

Short cut length, 2-flute design provides high rigidity for milling standard slots to a P9 tolerance and ramping operation. The Weldon shank prevents the end mill from slipping in the toolholder. AlCrN coating improves performance and extends the tool life.

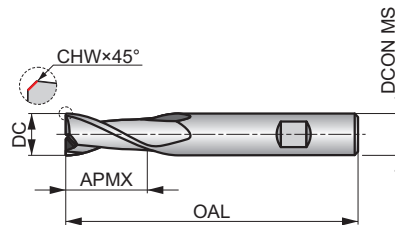

HM	N	NOF 2
	$\lambda$ 28°	$\gamma$ 9°
DIN 6535HB	AlCrN	
DIN 6527L		




Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 166 K	<b>P1.2</b> ■ 186 K	<b>P1.3</b> ■ 192 K	<b>P2.1</b> ■ 142 K	<b>P2.2</b> ■ 125 K	<b>P2.3</b> ■ 111 J	<b>P3.1</b> ■ 115 K	<b>P3.2</b> ■ 93 J	<b>P3.3</b> ■ 78 J	<b>P4.1</b> ■ 68 J	<b>P4.2</b> ■ 59 J	<b>P4.3</b> ■ 47 J	<b>M1.1</b> ■ 97 K	<b>M1.2</b> ■ 81 K
<b>M2.1</b> ■ 85 K	<b>M2.2</b> ■ 71 J	<b>M3.1</b> ■ 79 J	<b>M3.2</b> ■ 68 J	<b>M3.3</b> ■ 61 J	<b>M4.1</b> ■ 60 J	<b>K1.1</b> ■ 166 K	<b>K1.2</b> ■ 123 K	<b>K1.3</b> ■ 92 K	<b>K2.1</b> ■ 170 K	<b>K2.2</b> ■ 138 K	<b>K2.3</b> ■ 110 J	<b>K3.1</b> ■ 150 K	<b>K3.2</b> ■ 115 K
<b>K3.3</b> ■ 93 J	<b>K4.1</b> ■ 140 J	<b>K4.2</b> ■ 105 J	<b>K4.3</b> ■ 77 J	<b>K4.4</b> ■ 66 J	<b>K4.5</b> ■ 56 J	<b>K5.1</b> ■ 159 J	<b>K5.2</b> ■ 118 J	<b>K5.3</b> ■ 92 J	<b>N1.1</b> ▣ 330 K	<b>N1.2</b> ▣ 247 K	<b>N1.3</b> ■ 166 K	<b>N2.1</b> ■ 166 K	<b>N2.2</b> ■ 148 K
<b>N2.3</b> ■ 107 K	<b>N3.1</b> ■ 173 K	<b>N3.2</b> ■ 101 K	<b>N3.3</b> ▣ 52 K	<b>N4.1</b> ▣ 173 K	<b>N4.2</b> ▣ 67 K	<b>S1.1</b> ■ 72 J	<b>S1.2</b> ■ 64 J	<b>S2.1</b> ■ 49 J	<b>S3.1</b> ■ 38 J	<b>S4.1</b> ■ 30 J			

DCON MS tolerance h6; DC ≤ 7.00 mm: CHW ±0.03×45° mm; DC > 7.00 mm: CHW ±0.05×45° mm.

Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S812HB2.0	2.00	0.00	6.00	6.00	57.0	2
S812HB2.5	2.50	0.08	6.00	7.00	57.0	2
S812HB3.0	3.00	0.08	6.00	7.00	57.0	2
S812HB3.5	3.50	0.08	6.00	7.00	57.0	2
S812HB4.0	4.00	0.13	6.00	8.00	57.0	2
S812HB4.5	4.50	0.13	6.00	8.00	57.0	2
S812HB5.0	5.00	0.13	6.00	10.00	57.0	2
S812HB6.0	6.00	0.13	6.00	10.00	57.0	2
S812HB7.0	7.00	0.13	8.00	13.00	63.0	2
S812HB8.0	8.00	0.20	8.00	16.00	63.0	2
S812HB9.0	9.00	0.20	10.00	16.00	72.0	2
S812HB10.0	10.00	0.20	10.00	19.00	72.0	2
S812HB12.0	12.00	0.20	12.00	22.00	83.0	2
S812HB14.0	14.00	0.20	14.00	22.00	83.0	2
S812HB16.0	16.00	0.20	16.00	26.00	92.0	2
S812HB18.0	18.00	0.20	18.00	26.00	92.0	2
S812HB20.0	20.00	0.30	20.00	32.00	104.0	2


# S710



## 2-Flute Solid Carbide End Mill

Short cut length, 2-flute design with 40° helix provides high rigidity for milling standard slots. AlCrN coating improves performance and extends the tool life.

HM	N	NOF 2
	$\lambda$ 40°	$\gamma$ 10°
DIN 6535HA	AlCrN	DC h9
	DORMER	

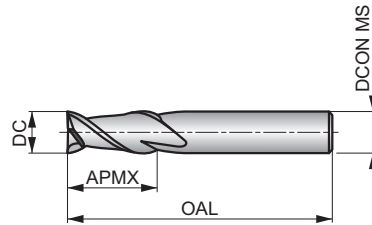

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 199 K	<b>P1.2</b> ■ 223 K	<b>P1.3</b> ■ 230 K	<b>P2.1</b> ■ 170 K	<b>P2.2</b> ■ 150 K	<b>P2.3</b> ■ 133 J	<b>P3.1</b> ■ 138 K	<b>P3.2</b> ■ 111 J	<b>P3.3</b> ■ 94 J	<b>P4.1</b> ■ 82 J	<b>P4.2</b> ■ 70 J	<b>M1.1</b> ■ 115 K	<b>M1.2</b> ■ 97 K	<b>M2.1</b> ■ 102 K
<b>M2.2</b> ■ 84 J	<b>M3.1</b> ■ 94 J	<b>M3.2</b> ■ 81 J	<b>K1.1</b> ■ 196 K	<b>K1.2</b> ■ 145 K	<b>K1.3</b> ■ 109 K	<b>K2.1</b> ■ 202 K	<b>K2.2</b> ■ 164 K	<b>K2.3</b> ■ 131 J	<b>K3.1</b> ■ 178 K	<b>K3.2</b> ■ 136 K	<b>K3.3</b> ■ 110 J	<b>K4.1</b> ■ 165 J	<b>K4.2</b> ■ 125 J
<b>K4.3</b> ■ 91 J	<b>K4.4</b> ■ 78 J	<b>K4.5</b> ■ 65 J	<b>K5.1</b> ■ 187 J	<b>K5.2</b> ■ 141 J	<b>K5.3</b> ■ 109 J	<b>S1.2</b> ■ 69 J	<b>S2.1</b> ■ 53 J	<b>S3.1</b> ■ 40 J	<b>S4.1</b> ■ 31 J				

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S7101.0	1.00	3.00	3.00	40.0	2
S7101.5	1.50	3.00	4.50	40.0	2
S7102.0	2.00	3.00	6.50	40.0	2
S7102.5	2.50	3.00	6.50	40.0	2
S7103.0	3.00	6.00	9.00	50.0	2
S7104.0	4.00	6.00	12.00	50.0	2
S7105.0	5.00	6.00	15.00	50.0	2
S7106.0	6.00	6.00	20.00	60.0	2
S7108.0	8.00	8.00	20.00	64.0	2
S71010.0	10.00	10.00	22.00	75.0	2
S71012.0	12.00	12.00	25.00	75.0	2
S71016.0	16.00	16.00	32.00	90.0	2
S71020.0	20.00	20.00	38.00	100.0	2

# S822



## 2-Flute Solid Carbide Slot End Mill

Medium cut length, 2-flute design provides high rigidity for milling standard slots to a P9 tolerance and ramping operation. AlCrN coating improves performance and extends the tool life.

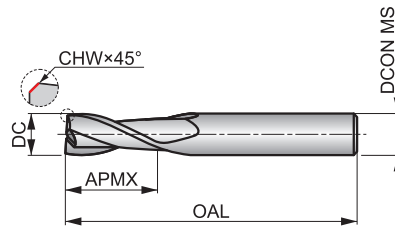

HM	N	NOF 2
	$\lambda$ 28°	$\gamma$ 9°
DIN 6535HA	AlCrN	
DORMER		



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 146 K	<b>P1.2</b> ■ 164 K	<b>P1.3</b> ■ 169 K	<b>P2.1</b> ■ 125 K	<b>P2.2</b> ■ 110 K	<b>P2.3</b> ■ 98 J	<b>P3.1</b> ■ 101 K	<b>P3.2</b> ■ 82 J	<b>P3.3</b> ■ 69 J	<b>P4.1</b> ■ 61 J	<b>P4.2</b> ■ 52 J	<b>P4.3</b> ■ 41 J	<b>M1.1</b> ■ 85 K	<b>M1.2</b> ■ 72 K
<b>M2.1</b> ■ 76 K	<b>M2.2</b> ■ 62 J	<b>M3.1</b> ■ 70 J	<b>M3.2</b> ■ 60 J	<b>M3.3</b> ■ 54 J	<b>M4.1</b> ■ 53 J	<b>K1.1</b> ■ 145 K	<b>K1.2</b> ■ 108 K	<b>K1.3</b> ■ 81 K	<b>K2.1</b> ■ 150 K	<b>K2.2</b> ■ 122 K	<b>K2.3</b> ■ 97 J	<b>K3.1</b> ■ 133 K	<b>K3.2</b> ■ 102 K
<b>K3.3</b> ■ 82 J	<b>K4.1</b> ■ 123 J	<b>K4.2</b> ■ 93 J	<b>K4.3</b> ■ 68 J	<b>K4.4</b> ■ 59 J	<b>K4.5</b> ■ 48 J	<b>K5.1</b> ■ 139 J	<b>K5.2</b> ■ 105 J	<b>K5.3</b> ■ 81 J	<b>N1.1</b> ■ 287 K	<b>N1.2</b> ■ 216 K	<b>N1.3</b> ■ 144 K	<b>N2.1</b> ■ 144 K	<b>N2.2</b> ■ 129 K
<b>N2.3</b> ■ 93 K	<b>N3.1</b> ■ 152 K	<b>N3.2</b> ■ 88 K	<b>N3.3</b> ■ 45 K	<b>N4.1</b> ■ 152 K	<b>N4.2</b> ■ 59 K	<b>S1.1</b> ■ 58 J	<b>S1.2</b> ■ 51 J	<b>S2.1</b> ■ 39 J	<b>S3.1</b> ■ 29 J	<b>S4.1</b> ■ 23 J			

DCON MS tolerance h6; DC ≤ 7.00 mm: CHW ±0.03×45° mm; DC > 7.00 mm: CHW ±0.05×45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S8222.0	2.00	—	6.00	8.00	57.0	2
S8222.5	2.50	0.08	6.00	12.00	57.0	2
S8223.0	3.00	0.08	6.00	12.00	57.0	2
S8224.0	4.00	0.13	6.00	14.00	57.0	2
S8225.0	5.00	0.13	6.00	16.00	57.0	2
S8226.0	6.00	0.13	6.00	19.00	57.0	2
S8227.0	7.00	0.13	8.00	19.00	63.0	2
S8228.0	8.00	0.20	8.00	19.00	63.0	2
S8229.0	9.00	0.20	10.00	21.00	72.0	2
S82210.0	10.00	0.20	10.00	22.00	72.0	2
S82212.0	12.00	0.20	12.00	25.00	83.0	2
S82214.0	14.00	0.20	14.00	30.00	83.0	2
S82216.0	16.00	0.20	16.00	32.00	92.0	2
S82218.0	18.00	0.20	18.00	32.00	92.0	2
S82220.0	20.00	0.30	20.00	38.00	104.0	2

# S803HA



## 3-Flute Solid Carbide Slot End Mill, DIN 6535 HA Shank

Extra short cut length, 3-flute design provides high rigidity for milling shallow slots to a P9 tolerance. AlCrN coating increases service life and improves performance. Also suited for plunging and ramping milling.

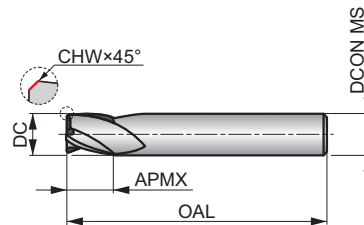

HM	N	NOF 3
	$\lambda$ 28°	$\gamma$ 9°
DIN 6535HA	AlCrN	
DIN 6527K		



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 206 J	<b>P1.2</b> ■ 230 J	<b>P1.3</b> ■ 238 J	<b>P2.1</b> ■ 176 J	<b>P2.2</b> ■ 155 J	<b>P2.3</b> ■ 137 I	<b>P3.1</b> ■ 143 J	<b>P3.2</b> ■ 114 I	<b>P3.3</b> ■ 97 I	<b>P4.1</b> ■ 84 I	<b>P4.2</b> ■ 72 I	<b>P4.3</b> ■ 58 I	<b>M1.1</b> ■ 121 J	<b>M1.2</b> ■ 102 J
<b>M2.1</b> ■ 107 J	<b>M2.2</b> ■ 89 I	<b>M2.3</b> ▣ 75 I	<b>M3.1</b> ■ 99 I	<b>M3.2</b> ■ 85 I	<b>M3.3</b> ▣ 76 I	<b>M4.1</b> ▣ 75 I	<b>M4.2</b> ▣ 63 I	<b>K1.1</b> ■ 205 J	<b>K1.2</b> ■ 152 J	<b>K1.3</b> ■ 114 J	<b>K2.1</b> ■ 210 J	<b>K2.2</b> ■ 171 J	<b>K2.3</b> ■ 137 I
<b>K3.1</b> ■ 186 J	<b>K3.2</b> ■ 143 J	<b>K3.3</b> ■ 115 I	<b>K4.1</b> ■ 173 I	<b>K4.2</b> ■ 131 I	<b>K4.3</b> ■ 95 I	<b>K4.4</b> ■ 82 I	<b>K4.5</b> ■ 68 I	<b>K5.1</b> ■ 196 I	<b>K5.2</b> ■ 147 I	<b>K5.3</b> ■ 114 I	<b>N1.1</b> ▣ 408 K	<b>N1.2</b> ▣ 307 K	<b>N1.3</b> ■ 206 K
<b>N2.1</b> ■ 206 J	<b>N2.2</b> ■ 184 J	<b>N2.3</b> ■ 132 J	<b>N3.1</b> ■ 215 J	<b>N3.2</b> ■ 125 J	<b>N3.3</b> ▣ 64 J	<b>N4.1</b> ▣ 215 J	<b>N4.2</b> ▣ 183 J	<b>S1.1</b> ▣ 81 I	<b>S1.2</b> ▣ 71 I	<b>S2.1</b> ▣ 55 I	<b>S3.1</b> ▣ 41 I	<b>S4.1</b> ▣ 32 I	

DCON MS tolerance h6; DC ≤ 7.75 mm: CHW ±0.03×45° mm; DC > 7.75 mm: CHW ±0.05×45° mm.

Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S803HA1.0	1.00	–	3.00	3.00	38.0	3
S803HA1.5	1.50	–	3.00	3.00	38.0	3
S803HA2.0	2.00	–	6.00	3.00	50.0	3
S803HA2.5	2.50	0.08	6.00	3.00	50.0	3
S803HA2.8	2.80	0.08	6.00	4.00	50.0	3
S803HA3.0	3.00	0.08	6.00	4.00	50.0	3
S803HA3.5	3.50	0.08	6.00	4.00	50.0	3
S803HA3.8	3.80	0.08	6.00	5.00	54.0	3
S803HA4.0	4.00	0.13	6.00	5.00	54.0	3
S803HA4.5	4.50	0.13	6.00	5.00	54.0	3
S803HA4.8	4.80	0.13	6.00	6.00	54.0	3
S803HA5.0	5.00	0.13	6.00	6.00	54.0	3
S803HA6.0	6.00	0.13	6.00	7.00	54.0	3
S803HA7.0	7.00	0.13	8.00	8.00	58.0	3
S803HA8.0	8.00	0.20	8.00	9.00	58.0	3
S803HA9.0	9.00	0.20	10.00	10.00	66.0	3
S803HA10.0	10.00	0.20	10.00	11.00	66.0	3
S803HA12.0	12.00	0.20	12.00	12.00	73.0	3
S803HA14.0	14.00	0.20	14.00	14.00	75.0	3
S803HA16.0	16.00	0.20	16.00	16.00	82.0	3
S803HA18.0	18.00	0.20	18.00	18.00	84.0	3
S803HA20.0	20.00	0.30	20.00	20.00	92.0	3


# S803HB



## 3-Flute Solid Carbide Slot End Mill, DIN 6535 HB Shank

Extra short cut length, 3-flute design provides high rigidity for milling shallow slots to a P9 tolerance. AlCrN coating increases service life and improves performance. Also suited for plunging and ramping milling.

HM	N	NOF 3
	$\lambda$ 28°	$\gamma$ 9°
DIN 6535HB	AlCrN	
DIN 6527K		

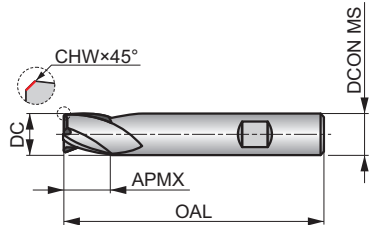

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 206 J	<b>P1.2</b> ■ 230 J	<b>P1.3</b> ■ 238 J	<b>P2.1</b> ■ 176 J	<b>P2.2</b> ■ 155 J	<b>P2.3</b> ■ 137 I	<b>P3.1</b> ■ 143 J	<b>P3.2</b> ■ 114 I	<b>P3.3</b> ■ 97 I	<b>P4.1</b> ■ 84 I	<b>P4.2</b> ■ 72 I	<b>P4.3</b> ■ 58 I	<b>M1.1</b> ■ 121 J	<b>M1.2</b> ■ 102 J
<b>M2.1</b> ■ 107 J	<b>M2.2</b> ■ 89 I	<b>M2.3</b> ■ 75 I	<b>M3.1</b> ■ 99 I	<b>M3.2</b> ■ 85 I	<b>M3.3</b> ■ 76 I	<b>M4.1</b> ■ 75 I	<b>M4.2</b> ■ 63 I	<b>K1.1</b> ■ 205 J	<b>K1.2</b> ■ 152 J	<b>K1.3</b> ■ 114 J	<b>K2.1</b> ■ 210 J	<b>K2.2</b> ■ 171 J	<b>K2.3</b> ■ 137 I
<b>K3.1</b> ■ 186 J	<b>K3.2</b> ■ 143 J	<b>K3.3</b> ■ 115 I	<b>K4.1</b> ■ 173 I	<b>K4.2</b> ■ 131 I	<b>K4.3</b> ■ 95 I	<b>K4.4</b> ■ 82 I	<b>K4.5</b> ■ 68 I	<b>K5.1</b> ■ 196 I	<b>K5.2</b> ■ 147 I	<b>K5.3</b> ■ 114 I	<b>N1.1</b> ■ 408 K	<b>N1.2</b> ■ 307 K	<b>N1.3</b> ■ 206 K
<b>N2.1</b> ■ 206 J	<b>N2.2</b> ■ 184 J	<b>N2.3</b> ■ 132 J	<b>N3.1</b> ■ 215 J	<b>N3.2</b> ■ 125 J	<b>N3.3</b> ■ 64 J	<b>N4.1</b> ■ 215 J	<b>N4.2</b> ■ 183 J	<b>S1.1</b> ■ 81 I	<b>S1.2</b> ■ 71 I	<b>S2.1</b> ■ 55 I	<b>S3.1</b> ■ 41 I	<b>S4.1</b> ■ 32 I	

DCON MS tolerance h6; DC ≤ 7.75 mm: CHW ±0.03×45° mm; DC > 7.75 mm: CHW ±0.05×45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S803HB2.0	2.00	—	6.00	3.00	50.0	3
S803HB2.5	2.50	0.08	6.00	3.00	50.0	3
S803HB2.8	2.80	0.08	6.00	4.00	50.0	3
S803HB3.0	3.00	0.08	6.00	4.00	50.0	3
S803HB3.5	3.50	0.08	6.00	4.00	50.0	3
S803HB3.8	3.80	0.08	6.00	5.00	54.0	3
S803HB4.0	4.00	0.13	6.00	5.00	54.0	3
S803HB4.5	4.50	0.13	6.00	5.00	54.0	3
S803HB4.8	4.80	0.13	6.00	6.00	54.0	3
S803HB5.0	5.00	0.13	6.00	6.00	54.0	3
S803HB5.75	5.75	0.13	6.00	7.00	54.0	3
S803HB6.0	6.00	0.13	6.00	7.00	54.0	3
S803HB6.75	6.75	0.13	8.00	8.00	58.0	3
S803HB7.0	7.00	0.13	8.00	8.00	58.0	3
S803HB7.75	7.75	0.13	8.00	9.00	58.0	3
S803HB8.0	8.00	0.20	8.00	9.00	58.0	3
S803HB9.0	9.00	0.20	10.00	10.00	66.0	3
S803HB9.7	9.70	0.20	10.00	11.00	66.0	3
S803HB10.0	10.00	0.20	10.00	11.00	66.0	3
S803HB11.7	11.70	0.20	12.00	12.00	73.0	3
S803HB12.0	12.00	0.20	12.00	12.00	73.0	3
S803HB14.0	14.00	0.20	14.00	14.00	75.0	3
S803HB16.0	16.00	0.20	16.00	16.00	82.0	3
S803HB18.0	18.00	0.20	18.00	18.00	84.0	3
S803HB20.0	20.00	0.30	20.00	20.00	92.0	3

# S813HA



## 3-Flute Solid Carbide Slot End Mill, DIN 6535 HA Shank

Short cut length, 3-flute design provides high rigidity for milling standard slots to a P9 tolerance. AlCrN coating increases service life and improves performance. Also suited for plunging and ramping milling.

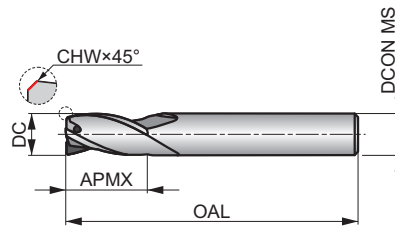

HM	N	NOF 3
	$\lambda$ 28°	$\gamma$ 9°
DIN 6535HA	AlCrN	
DIN 6527L		



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 166 J	<b>P1.2</b> ■ 186 J	<b>P1.3</b> ■ 192 J	<b>P2.1</b> ■ 142 J	<b>P2.2</b> ■ 125 J	<b>P2.3</b> ■ 111 I	<b>P3.1</b> ■ 115 J	<b>P3.2</b> ■ 93 I	<b>P3.3</b> ■ 78 I	<b>P4.1</b> ■ 68 I	<b>P4.2</b> ■ 59 I	<b>P4.3</b> ▣ 47 I	<b>M1.1</b> ■ 97 J	<b>M1.2</b> ■ 81 J
<b>M2.1</b> ■ 85 J	<b>M2.2</b> ■ 71 I	<b>M3.1</b> ▣ 79 I	<b>M3.2</b> ▣ 68 I	<b>M3.3</b> ▣ 61 I	<b>M4.1</b> ▣ 60 I	<b>K1.1</b> ■ 166 J	<b>K1.2</b> ■ 123 J	<b>K1.3</b> ■ 92 J	<b>K2.1</b> ■ 170 J	<b>K2.2</b> ■ 138 J	<b>K2.3</b> ■ 110 I	<b>K3.1</b> ■ 150 J	<b>K3.2</b> ■ 115 J
<b>K3.3</b> ■ 93 I	<b>K4.1</b> ■ 140 I	<b>K4.2</b> ■ 105 I	<b>K4.3</b> ■ 77 I	<b>K4.4</b> ■ 66 I	<b>K4.5</b> ■ 56 I	<b>K5.1</b> ■ 159 I	<b>K5.2</b> ■ 118 I	<b>K5.3</b> ■ 92 I	<b>N1.1</b> ▣ 330 K	<b>N1.2</b> ▣ 247 K	<b>N1.3</b> ■ 166 K	<b>N2.1</b> ■ 166 J	<b>N2.2</b> ■ 148 J
<b>N2.3</b> ■ 107 J	<b>N3.1</b> ■ 173 J	<b>N3.2</b> ■ 101 J	<b>N3.3</b> ▣ 52 J	<b>N4.1</b> ▣ 173 J	<b>N4.2</b> ▣ 67 J	<b>S1.1</b> ▣ 72 I	<b>S1.2</b> ▣ 64 I	<b>S2.1</b> ▣ 49 I	<b>S3.1</b> ▣ 38 I	<b>S4.1</b> ▣ 30 I			

DCON MS tolerance h6; DC ≤ 7.00 mm: CHW ±0.03×45° mm; DC > 7.00 mm: CHW ±0.05×45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S813HA2.0	2.00	0.00	6.00	6.00	57.0	3
S813HA2.5	2.50	0.08	6.00	7.00	57.0	3
S813HA3.0	3.00	0.08	6.00	7.00	57.0	3
S813HA3.5	3.50	0.08	6.00	7.00	57.0	3
S813HA4.0	4.00	0.13	6.00	8.00	57.0	3
S813HA4.5	4.50	0.13	6.00	8.00	57.0	3
S813HA5.0	5.00	0.13	6.00	10.00	57.0	3
S813HA6.0	6.00	0.13	6.00	10.00	57.0	3
S813HA7.0	7.00	0.13	8.00	13.00	63.0	3
S813HA8.0	8.00	0.20	8.00	16.00	63.0	3
S813HA9.0	9.00	0.20	10.00	16.00	72.0	3
S813HA10.0	10.00	0.20	10.00	19.00	72.0	3
S813HA12.0	12.00	0.20	12.00	22.00	83.0	3
S813HA14.0	14.00	0.20	14.00	22.00	83.0	3
S813HA16.0	16.00	0.20	16.00	26.00	92.0	3
S813HA18.0	18.00	0.20	18.00	26.00	92.0	3
S813HA20.0	20.00	0.30	20.00	32.00	104.0	3

# S813HB



## 3-Flute Solid Carbide Slot End Mill, DIN 6535 HB Shank

Short cut length, 3-flute design provides high rigidity for milling standard slots to a P9 tolerance. The Weldon shank prevents the end mill from slipping in the toolholder. AlCrN coating improves performance and extends the tool life. Also suited for plunging and ramping milling.

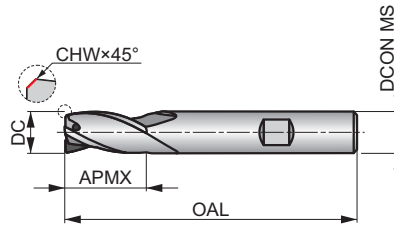

HM	N	NOF 3
	$\lambda$ 28°	$\gamma$ 9°
DIN 6535HB	AlCrN	
DIN 6527L		




Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 166 J	<b>P1.2</b> ■ 186 J	<b>P1.3</b> ■ 192 J	<b>P2.1</b> ■ 142 J	<b>P2.2</b> ■ 125 J	<b>P2.3</b> ■ 111 I	<b>P3.1</b> ■ 115 J	<b>P3.2</b> ■ 93 I	<b>P3.3</b> ■ 78 I	<b>P4.1</b> ■ 68 I	<b>P4.2</b> ■ 59 I	<b>P4.3</b> ▣ 47 I	<b>M1.1</b> ■ 97 J	<b>M1.2</b> ■ 81 J
<b>M2.1</b> ■ 85 J	<b>M2.2</b> ■ 71 I	<b>M3.1</b> ▣ 79 I	<b>M3.2</b> ▣ 68 I	<b>M3.3</b> ▣ 61 I	<b>M4.1</b> ▣ 60 I	<b>K1.1</b> ■ 166 J	<b>K1.2</b> ■ 123 J	<b>K1.3</b> ■ 92 J	<b>K2.1</b> ■ 170 J	<b>K2.2</b> ■ 138 J	<b>K2.3</b> ■ 110 I	<b>K3.1</b> ■ 150 J	<b>K3.2</b> ■ 115 J
<b>K3.3</b> ■ 93 I	<b>K4.1</b> ■ 140 I	<b>K4.2</b> ■ 105 I	<b>K4.3</b> ■ 77 I	<b>K4.4</b> ■ 66 I	<b>K4.5</b> ■ 56 I	<b>K5.1</b> ■ 159 I	<b>K5.2</b> ■ 118 I	<b>K5.3</b> ■ 92 I	<b>N1.1</b> ▣ 330 K	<b>N1.2</b> ▣ 247 K	<b>N1.3</b> ■ 166 K	<b>N2.1</b> ■ 166 J	<b>N2.2</b> ■ 148 J
<b>N2.3</b> ■ 107 J	<b>N3.1</b> ■ 173 J	<b>N3.2</b> ■ 101 J	<b>N3.3</b> ▣ 52 J	<b>N4.1</b> ▣ 173 J	<b>N4.2</b> ▣ 67 J	<b>S1.1</b> ▣ 72 I	<b>S1.2</b> ▣ 64 I	<b>S2.1</b> ▣ 49 I	<b>S3.1</b> ▣ 38 I	<b>S4.1</b> ▣ 30 I			

DCON MS tolerance h6; DC ≤ 7.00 mm: CHW ±0.03×45° mm; DC > 7.00 mm: CHW ±0.05×45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S813HB2.0	2.00	0.00	6.00	6.00	57.0	3
S813HB2.5	2.50	0.08	6.00	7.00	57.0	3
S813HB3.0	3.00	0.08	6.00	7.00	57.0	3
S813HB3.5	3.50	0.08	6.00	7.00	57.0	3
S813HB4.0	4.00	0.13	6.00	8.00	57.0	3
S813HB4.5	4.50	0.13	6.00	8.00	57.0	3
S813HB5.0	5.00	0.13	6.00	10.00	57.0	3
S813HB6.0	6.00	0.13	6.00	10.00	57.0	3
S813HB7.0	7.00	0.13	8.00	13.00	63.0	3
S813HB8.0	8.00	0.20	8.00	16.00	63.0	3
S813HB9.0	9.00	0.20	10.00	16.00	72.0	3
S813HB10.0	10.00	0.20	10.00	19.00	72.0	3
S813HB12.0	12.00	0.20	12.00	22.00	83.0	3
S813HB14.0	14.00	0.20	14.00	22.00	83.0	3
S813HB16.0	16.00	0.20	16.00	26.00	92.0	3
S813HB18.0	18.00	0.20	18.00	26.00	92.0	3
S813HB20.0	20.00	0.30	20.00	32.00	104.0	3

# S713




## 3-Flute Solid Carbide End Mill

Short cut length, 3-flute design with 40° helix provides high rigidity for milling standard slots. AlCrN coating improves performance and extends the tool life.

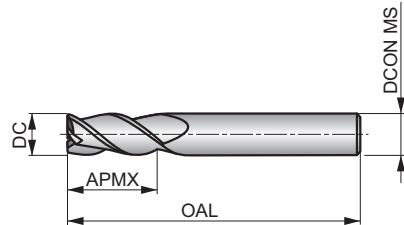

HM	N	NOF 3
	λ 40°	γ 10°
DIN 6535HA	AlCrN	DC h9




Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 199 J	<b>P1.2</b> ■ 223 J	<b>P1.3</b> ■ 230 J	<b>P2.1</b> ■ 170 J	<b>P2.2</b> ■ 150 J	<b>P2.3</b> ■ 133 I	<b>P3.1</b> ■ 138 J	<b>P3.2</b> ■ 111 I	<b>P3.3</b> ■ 94 I	<b>P4.1</b> ■ 82 I	<b>P4.2</b> ■ 70 I	<b>M1.1</b> ■ 115 J	<b>M1.2</b> ■ 97 J	<b>M2.1</b> ■ 102 J
<b>M2.2</b> ■ 84 I	<b>M3.1</b> ■ 94 I	<b>M3.2</b> ■ 81 I	<b>K1.1</b> ■ 196 J	<b>K1.2</b> ■ 145 J	<b>K1.3</b> ■ 109 J	<b>K2.1</b> ■ 202 J	<b>K2.2</b> ■ 164 J	<b>K2.3</b> ■ 131 I	<b>K3.1</b> ■ 178 J	<b>K3.2</b> ■ 136 J	<b>K3.3</b> ■ 110 I	<b>K4.1</b> ■ 165 I	<b>K4.2</b> ■ 125 I
<b>K4.3</b> ■ 91 I	<b>K4.4</b> ■ 78 I	<b>K4.5</b> ■ 65 I	<b>K5.1</b> ■ 187 I	<b>K5.2</b> ■ 141 I	<b>K5.3</b> ■ 109 I	<b>S1.2</b> ■ 69 I	<b>S2.1</b> ■ 53 I	<b>S3.1</b> ■ 40 I	<b>S4.1</b> ■ 31 I				

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S7131.5	1.50	4.00	4.50	40.0	3
S7132.0	2.00	4.00	6.50	40.0	3
S7133.0	3.00	3.00	9.00	40.0	3
S7134.0	4.00	4.00	12.00	50.0	3
S7135.0	5.00	5.00	15.00	50.0	3
S7136.0	6.00	6.00	16.00	50.0	3
S7138.0	8.00	8.00	20.00	64.0	3
S71310.0	10.00	10.00	22.00	70.0	3
S71312.0	12.00	12.00	25.00	75.0	3
S71314.0	14.00	14.00	32.00	90.0	3
S71316.0	16.00	16.00	32.00	90.0	3
S71318.0	18.00	18.00	38.00	100.0	3
S71320.0	20.00	20.00	38.00	100.0	3

# S823



## 3-Flute Solid Carbide Slot End Mill

Medium cut length, 3-flute design provides high rigidity for milling standard slots to a P9 tolerance and ramping operation. AlCrN coating improves performance and extends the tool life.

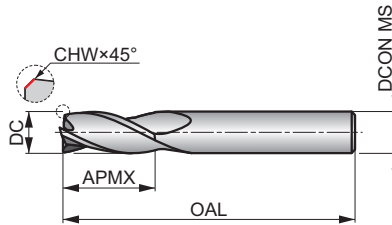

HM	N	NOF 3
	$\lambda$ 28°	$\gamma$ 9°
DIN 6535HA	AlCrN	
DORMER		



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 145 J	<b>P1.2</b> ■ 162 J	<b>P1.3</b> ■ 167 J	<b>P2.1</b> ■ 124 J	<b>P2.2</b> ■ 109 J	<b>P2.3</b> ■ 97 I	<b>P3.1</b> ■ 100 J	<b>P3.2</b> ■ 81 I	<b>P3.3</b> ■ 68 I	<b>P4.1</b> ■ 60 I	<b>P4.2</b> ■ 51 I	<b>P4.3</b> ▣ 41 I	<b>M1.1</b> ■ 84 J	<b>M1.2</b> ■ 71 J
<b>M2.1</b> ■ 75 J	<b>M2.2</b> ■ 61 I	<b>M3.1</b> ▣ 69 I	<b>M3.2</b> ▣ 59 I	<b>M3.3</b> ▣ 53 I	<b>M4.1</b> ▣ 52 I	<b>K1.1</b> ■ 144 J	<b>K1.2</b> ■ 107 J	<b>K1.3</b> ■ 80 J	<b>K2.1</b> ■ 149 J	<b>K2.2</b> ■ 121 J	<b>K2.3</b> ■ 96 I	<b>K3.1</b> ■ 132 J	<b>K3.2</b> ■ 101 J
<b>K3.3</b> ■ 81 I	<b>K4.1</b> ■ 122 I	<b>K4.2</b> ■ 92 I	<b>K4.3</b> ■ 67 I	<b>K4.4</b> ■ 58 I	<b>K4.5</b> ■ 48 I	<b>K5.1</b> ■ 138 I	<b>K5.2</b> ■ 104 I	<b>K5.3</b> ■ 80 I	<b>N1.1</b> ▣ 284 K	<b>N1.2</b> ▣ 214 K	<b>N1.3</b> ■ 143 K	<b>N2.1</b> ■ 143 J	<b>N2.2</b> ■ 128 J
<b>N2.3</b> ■ 92 J	<b>N3.1</b> ■ 150 J	<b>N3.2</b> ■ 87 J	<b>N3.3</b> ▣ 45 J	<b>N4.1</b> ▣ 150 J	<b>N4.2</b> ▣ 58 J	<b>S1.1</b> ▣ 113 I	<b>S1.2</b> ▣ 100 I	<b>S2.1</b> ▣ 77 I	<b>S3.1</b> ▣ 58 I	<b>S4.1</b> ▣ 45 I			

DCON MS tolerance h6; DC ≤ 7.00 mm: CHW ±0.03×45° mm; DC > 7.00 mm: CHW ±0.05×45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S8232.0	2.00	—	6.00	8.00	57.0	3
S8232.5	2.50	0.08	6.00	12.00	57.0	3
S8233.0	3.00	0.08	6.00	12.00	57.0	3
S8234.0	4.00	0.13	6.00	14.00	57.0	3
S8235.0	5.00	0.13	6.00	16.00	57.0	3
S8236.0	6.00	0.13	6.00	19.00	57.0	3
S8237.0	7.00	0.13	8.00	19.00	63.0	3
S8238.0	8.00	0.20	8.00	19.00	63.0	3
S8239.0	9.00	0.20	10.00	21.00	72.0	3
S82310.0	10.00	0.20	10.00	22.00	72.0	3
S82312.0	12.00	0.20	12.00	25.00	83.0	3
S82314.0	14.00	0.20	14.00	30.00	83.0	3
S82316.0	16.00	0.20	16.00	32.00	92.0	3
S82318.0	18.00	0.20	18.00	32.00	92.0	3
S82320.0	20.00	0.30	20.00	38.00	104.0	3

# S714



## 3-Flute Solid Carbide End Mill, Long Series

Long cut length, 3-flute design with 40° helix provides high rigidity for profile milling deep walls. AlCrN coating improves performance and extends the tool life.

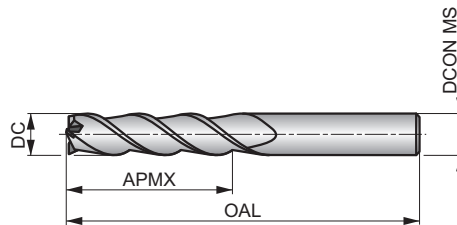

HM	N	NOF 3
	λ 40°	γ 10°
DIN 6535HA	AlCrN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 140 J	<b>P1.2</b> ■ 157 J	<b>P1.3</b> ■ 162 J	<b>P2.1</b> ■ 120 J	<b>P2.2</b> ■ 106 J	<b>P2.3</b> ■ 94 I	<b>P3.1</b> ■ 97 J	<b>P3.2</b> ■ 78 I	<b>P3.3</b> ■ 66 I	<b>P4.1</b> ■ 58 I	<b>P4.2</b> ■ 49 I	<b>M1.1</b> ■ 81 J	<b>M1.2</b> ■ 68 J	<b>M2.1</b> ■ 71 J
<b>M2.2</b> ■ 59 I	<b>M3.1</b> ■ 66 I	<b>M3.2</b> ■ 57 I	<b>K1.1</b> ■ 138 J	<b>K1.2</b> ■ 102 J	<b>K1.3</b> ■ 77 J	<b>K2.1</b> ■ 142 J	<b>K2.2</b> ■ 115 J	<b>K2.3</b> ■ 92 I	<b>K3.1</b> ■ 125 J	<b>K3.2</b> ■ 96 J	<b>K3.3</b> ■ 78 I	<b>K4.1</b> ■ 116 I	<b>K4.2</b> ■ 88 I
<b>K4.3</b> ■ 64 I	<b>K4.4</b> ■ 55 I	<b>K4.5</b> ■ 46 I	<b>K5.1</b> ■ 132 I	<b>K5.2</b> ■ 99 I	<b>K5.3</b> ■ 77 I	<b>N1.1</b> ▣ 249 K	<b>N1.2</b> ▣ 187 K	<b>N1.3</b> ▣ 125 K	<b>N2.1</b> ▣ 125 J	<b>N2.2</b> ▣ 112 J	<b>N2.3</b> ▣ 81 J	<b>N3.1</b> ▣ 131 J	<b>N3.2</b> ▣ 76 J
<b>N3.3</b> ▣ 39 J	<b>S1.2</b> ■ 49 I	<b>S2.1</b> ■ 37 I	<b>S3.1</b> ■ 28 I	<b>S4.1</b> ■ 22 I									

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S7143.0	3.00	3.00	19.00	60.0	3
S7144.0	4.00	4.00	19.00	60.0	3
S7145.0	5.00	5.00	19.00	60.0	3
S7146.0	6.00	6.00	31.00	75.0	3
S7148.0	8.00	8.00	31.00	75.0	3
S71410.0	10.00	10.00	31.00	75.0	3
S71412.0	12.00	12.00	50.00	100.0	3
S71414.0	14.00	14.00	57.00	125.0	3
S71416.0	16.00	16.00	57.00	125.0	3
S71418.0	18.00	18.00	57.00	125.0	3
S71420.0	20.00	20.00	57.00	125.0	3


# S715



## 3-Flute Solid Carbide End Mill, Extra Long Series

Extra long cut length, 3-flute design with 40° helix provides high rigidity for profile milling extra deep walls. AlCrN coating improves performance and extends the tool life.

HM	N	NOF 3
	λ 40°	γ 10°
DIN 6535HA	AlCrN	DC h9
	DORMER	

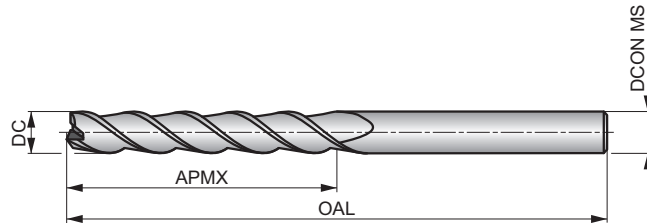

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 88 J	<b>P1.2</b> ■ 98 J	<b>P1.3</b> ■ 101 J	<b>P2.1</b> ■ 75 J	<b>P2.2</b> ■ 66 J	<b>P2.3</b> ■ 59 I	<b>P3.1</b> ■ 61 J	<b>P3.2</b> ■ 49 I	<b>P3.3</b> ■ 41 I	<b>P4.1</b> ■ 36 I	<b>P4.2</b> ■ 31 I	<b>M1.1</b> ■ 50 J	<b>M1.2</b> ■ 42 J	<b>M2.1</b> ■ 44 J
<b>M2.2</b> ■ 36 I	<b>M3.1</b> ■ 41 I	<b>M3.2</b> ■ 35 I	<b>K1.1</b> ■ 86 J	<b>K1.2</b> ■ 64 J	<b>K1.3</b> ■ 48 J	<b>K2.1</b> ■ 89 J	<b>K2.2</b> ■ 72 J	<b>K2.3</b> ■ 58 I	<b>K3.1</b> ■ 79 J	<b>K3.2</b> ■ 60 J	<b>K3.3</b> ■ 49 I	<b>K4.1</b> ■ 73 I	<b>K4.2</b> ■ 55 I
<b>K4.3</b> ■ 40 I	<b>K4.4</b> ■ 35 I	<b>K4.5</b> ■ 29 I	<b>K5.1</b> ■ 83 I	<b>K5.2</b> ■ 62 I	<b>K5.3</b> ■ 48 I	<b>N1.1</b> ▣ 178 K	<b>N1.2</b> ▣ 134 K	<b>N1.3</b> ▣ 190 K	<b>N2.1</b> ▣ 190 J	<b>N2.2</b> ▣ 180 J	<b>N2.3</b> ▣ 158 J	<b>N3.1</b> ▣ 194 J	<b>N3.2</b> ▣ 155 J
<b>N3.3</b> ▣ 28 J	<b>S1.2</b> ■ 30 I	<b>S2.1</b> ■ 23 I	<b>S3.1</b> ■ 18 I	<b>S4.1</b> ■ 14 I									

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S7153.0	3.00	3.00	25.00	100.0	3
S7154.0	4.00	4.00	31.00	100.0	3
S7155.0	5.00	5.00	31.00	100.0	3
S7156.0	6.00	6.00	38.00	100.0	3
S7158.0	8.00	8.00	41.00	100.0	3
S71510.0	10.00	10.00	57.00	125.0	3
S71512.0	12.00	12.00	75.00	150.0	3
S71514.0	14.00	14.00	75.00	150.0	3
S71516.0	16.00	16.00	75.00	150.0	3
S71518.0	18.00	18.00	75.00	150.0	3
S71520.0	20.00	20.00	75.00	150.0	3

Material code (BMC)	HM	HM	HM	HM	HM	HM	HM						
Mill Profile	N	N	N	N	N	N	N						
Number of flutes (NOF)	NOF 4	NOF 4	NOF 4	NOF 4	NOF 4	NOF 4	NOF 4						
Cut length													
Flute Helix (FHA)	$\lambda$ 34°	$\lambda$ 34°	$\lambda$ 34°	$\lambda$ 34°	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 40°						
Flute Helix (FHA)	$\lambda$ 34°	$\lambda$ 34°	$\lambda$ 34°	$\lambda$ 34°	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 40°						
Radial rake angle (GAMF)	$\gamma$ 9°	$\gamma$ 9°	$\gamma$ 9°	$\gamma$ 9°	$\gamma$ 10°	$\gamma$ 10°	$\gamma$ 10°						
Shank	 DIN 6535HB	 DIN 6535HB	 DIN 6535HA	 DIN 6535HB	 DIN 6535HA	 DIN 6535HA	 DIN 6535HA						
Coating	 AlCN	 AlCN	 AlCN	 AlCN	 AlCN	 AlCN	 AlCN						
Cutting diameter tolerance class (TCDC)	DC h10	DC h10	DC h10	DC h10	DC h9	DC h9	DC h9						
Direction													
Basic standard group (BSG)	DIN 6527K	DIN 6527K	DIN 6527L	DIN 6527L	DORMER	DORMER	DORMER						

Product Family Code		S804HA	S804HB	S814HA	S814HB	S716	S717	S718					
PSF cutting diameters range		2.00 – 25.00	2.00 – 25.00	2.00 – 25.00	2.00 – 25.00	2.00 – 20.00	3.00 – 20.00	3.00 – 20.00					
		96	97	98	99	100	101	102					
<b>P</b>	P1	■	■	■	■	■	■	■					
	P2	■	■	■	■	■	■	■					
	P3	■	■	■	■	■	■	■					
	P4	■	■	■	■	■	■	■					
<b>M</b>	M1	■	■	■	■	■	■	■					
	M2	■	■	■	■	■	■	■					
	M3	■	■	▣	▣	■	■	■					
	M4	▣	▣	▣	▣	■	■	■					
<b>K</b>	K1	■	■	■	■	■	■	■					
	K2	■	■	■	■	■	■	■					
	K3	■	■	■	■	■	■	■					
	K4	■	■	■	■	■	■	■					
	K5	■	■	■	■	■	■	■					
<b>N</b>	N1	▣	▣	▣	▣		▣	▣					
	N2	▣	▣	▣	▣		▣	▣					
	N3	■	■	■	■		▣	▣					
	N4	▣	▣	▣	▣								
	N5												
<b>S</b>	S1	▣	▣	▣	▣	■	■	■					
	S2	▣	▣	▣	▣	■	■	■					
	S3	▣	▣	▣	▣	■	■	■					
	S4	▣	▣	▣	▣	■	■	■					
<b>H</b>	H1												
	H2												
	H3												
	H4												


# S804HA



## 4-Flute Solid Carbide End Mill, DIN 6535 HA Shank

Extra short cut length, 4-flute design provides high rigidity for shallow profile and plunge milling applications. AlCrN coating increases service life and improves performance.

HM	N	NOF 4
	λ 34°	γ 9°
DIN 6535HA	AlCrN	DC h10
	DIN 6527K	

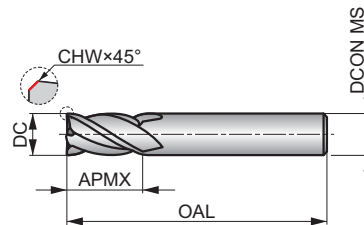

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 206 J	<b>P1.2</b> ■ 230 J	<b>P1.3</b> ■ 238 J	<b>P2.1</b> ■ 176 J	<b>P2.2</b> ■ 155 J	<b>P2.3</b> ■ 137 I	<b>P3.1</b> ■ 143 J	<b>P3.2</b> ■ 114 I	<b>P3.3</b> ■ 97 I	<b>P4.1</b> ■ 84 I	<b>P4.2</b> ■ 72 I	<b>P4.3</b> ■ 58 I	<b>M1.1</b> ■ 121 J	<b>M1.2</b> ■ 102 J
<b>M2.1</b> ■ 107 J	<b>M2.2</b> ■ 89 I	<b>M2.3</b> ▣ 175 I	<b>M3.1</b> ■ 99 I	<b>M3.2</b> ■ 85 I	<b>M3.3</b> ▣ 176 I	<b>M4.1</b> ▣ 175 I	<b>M4.2</b> ▣ 163 I	<b>K1.1</b> ■ 205 J	<b>K1.2</b> ■ 152 J	<b>K1.3</b> ■ 114 J	<b>K2.1</b> ■ 210 J	<b>K2.2</b> ■ 171 J	<b>K2.3</b> ■ 137 I
<b>K3.1</b> ■ 186 J	<b>K3.2</b> ■ 143 J	<b>K3.3</b> ■ 115 I	<b>K4.1</b> ■ 173 I	<b>K4.2</b> ■ 131 I	<b>K4.3</b> ■ 95 I	<b>K4.4</b> ■ 82 I	<b>K4.5</b> ■ 68 I	<b>K5.1</b> ■ 196 I	<b>K5.2</b> ■ 147 I	<b>K5.3</b> ■ 114 I	<b>N1.1</b> ▣ 408 J	<b>N1.2</b> ▣ 307 J	<b>N1.3</b> ▣ 206 J
<b>N2.1</b> ▣ 206 J	<b>N2.2</b> ▣ 184 J	<b>N2.3</b> ▣ 132 J	<b>N3.1</b> ■ 215 J	<b>N3.2</b> ■ 125 J	<b>N3.3</b> ▣ 64 J	<b>N4.1</b> ▣ 215 J	<b>N4.2</b> ▣ 183 J	<b>S1.1</b> ▣ 81 I	<b>S1.2</b> ▣ 71 I	<b>S2.1</b> ▣ 55 I	<b>S3.1</b> ▣ 41 I	<b>S4.1</b> ▣ 32 I	

DCON MS tolerance h6; DC ≤ 8.00 mm: CHW ±0.03×45° mm; DC > 8.00 mm: CHW ±0.05×45° mm.

Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S804HA2.0	2.00	—	6.00	4.00	50.0	4
S804HA3.0	3.00	0.08	6.00	5.00	50.0	4
S804HA4.0	4.00	0.13	6.00	8.00	54.0	4
S804HA5.0	5.00	0.13	6.00	9.00	54.0	4
S804HA6.0	6.00	0.13	6.00	10.00	54.0	4
S804HA8.0	8.00	0.13	8.00	12.00	58.0	4
S804HA10.0	10.00	0.20	10.00	14.00	66.0	4
S804HA12.0	12.00	0.20	12.00	16.00	73.0	4
S804HA16.0	16.00	0.20	16.00	22.00	82.0	4
S804HA20.0	20.00	0.30	20.00	26.00	92.0	4
S804HA25.0	25.00	0.30	25.00	32.00	121.0	4


# S804HB



## 4-Flute Solid Carbide End Mill, DIN 6535 HB Shank

Extra short cut length, 4-flute design provides high rigidity for shallow profile and plunge milling applications. The Weldon shank prevents the end mill from slipping in the toolholder. AlCrN coating increases service life and improves performance.

HM	N	NOF 4
	$\lambda$ 34°	$\gamma$ 9°
DIN 6535HB	AlCrN	DC h10
	DIN 6527K	

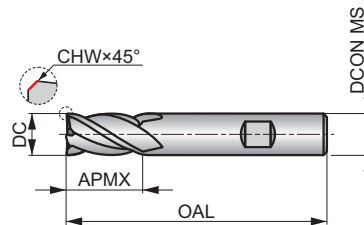

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 206 J	<b>P1.2</b> ■ 230 J	<b>P1.3</b> ■ 238 J	<b>P2.1</b> ■ 176 J	<b>P2.2</b> ■ 155 J	<b>P2.3</b> ■ 137 I	<b>P3.1</b> ■ 143 J	<b>P3.2</b> ■ 114 I	<b>P3.3</b> ■ 97 I	<b>P4.1</b> ■ 84 I	<b>P4.2</b> ■ 72 I	<b>P4.3</b> ■ 58 I	<b>M1.1</b> ■ 121 J	<b>M1.2</b> ■ 102 J
<b>M2.1</b> ■ 107 J	<b>M2.2</b> ■ 89 I	<b>M2.3</b> ■ 75 I	<b>M3.1</b> ■ 99 I	<b>M3.2</b> ■ 85 I	<b>M3.3</b> ■ 76 I	<b>M4.1</b> ■ 75 I	<b>M4.2</b> ■ 63 I	<b>K1.1</b> ■ 205 J	<b>K1.2</b> ■ 152 J	<b>K1.3</b> ■ 114 J	<b>K2.1</b> ■ 210 J	<b>K2.2</b> ■ 171 J	<b>K2.3</b> ■ 137 I
<b>K3.1</b> ■ 186 J	<b>K3.2</b> ■ 143 J	<b>K3.3</b> ■ 115 I	<b>K4.1</b> ■ 173 I	<b>K4.2</b> ■ 131 I	<b>K4.3</b> ■ 95 I	<b>K4.4</b> ■ 82 I	<b>K4.5</b> ■ 68 I	<b>K5.1</b> ■ 196 I	<b>K5.2</b> ■ 147 I	<b>K5.3</b> ■ 114 I	<b>N1.1</b> ■ 408 J	<b>N1.2</b> ■ 307 J	<b>N1.3</b> ■ 206 J
<b>N2.1</b> ■ 206 J	<b>N2.2</b> ■ 184 J	<b>N2.3</b> ■ 132 J	<b>N3.1</b> ■ 215 J	<b>N3.2</b> ■ 125 J	<b>N3.3</b> ■ 64 J	<b>N4.1</b> ■ 215 J	<b>N4.2</b> ■ 183 J	<b>S1.1</b> ■ 81 I	<b>S1.2</b> ■ 71 I	<b>S2.1</b> ■ 55 I	<b>S3.1</b> ■ 41 I	<b>S4.1</b> ■ 32 I	

DCON MS tolerance h6; DC ≤ 8.00 mm: CHW ±0.03×45° mm; DC > 8.00 mm: CHW ±0.05×45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S804HB2.0	2.00	—	6.00	4.00	50.0	4
S804HB3.0	3.00	0.08	6.00	5.00	50.0	4
S804HB4.0	4.00	0.13	6.00	8.00	54.0	4
S804HB5.0	5.00	0.13	6.00	9.00	54.0	4
S804HB6.0	6.00	0.13	6.00	10.00	54.0	4
S804HB8.0	8.00	0.13	8.00	12.00	58.0	4
S804HB10.0	10.00	0.20	10.00	14.00	66.0	4
S804HB12.0	12.00	0.20	12.00	16.00	73.0	4
S804HB16.0	16.00	0.20	16.00	22.00	82.0	4
S804HB20.0	20.00	0.30	20.00	26.00	92.0	4
S804HB25.0	25.00	0.30	25.00	32.00	121.0	4

# S814HA



## 4-Flute Solid Carbide End Mill, DIN 6535 HA Shank

Short cut length, 4-flute design provides high rigidity for general profile and plunge milling applications. AlCrN coating improves performance and extends the tool life.

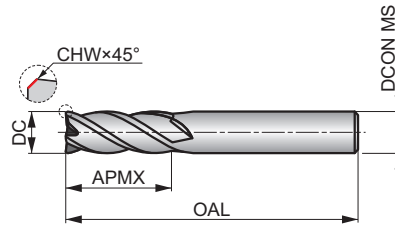

HM	N	NOF 4
	$\lambda$ 34°	$\gamma$ 9°
DIN 6535HA	AlCrN	
DIN 6527L	DC h10	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 166 J	<b>P1.2</b> ■ 186 J	<b>P1.3</b> ■ 192 J	<b>P2.1</b> ■ 142 J	<b>P2.2</b> ■ 125 J	<b>P2.3</b> ■ 111 I	<b>P3.1</b> ■ 115 J	<b>P3.2</b> ■ 93 I	<b>P3.3</b> ■ 78 I	<b>P4.1</b> ■ 68 I	<b>P4.2</b> ■ 59 I	<b>P4.3</b> ▣ 47 I	<b>M1.1</b> ■ 97 J	<b>M1.2</b> ■ 81 J
<b>M2.1</b> ■ 85 J	<b>M2.2</b> ■ 71 I	<b>M3.1</b> ▣ 79 I	<b>M3.2</b> ▣ 68 I	<b>M3.3</b> ▣ 61 I	<b>M4.1</b> ▣ 60 I	<b>K1.1</b> ■ 166 J	<b>K1.2</b> ■ 123 J	<b>K1.3</b> ■ 92 J	<b>K2.1</b> ■ 170 J	<b>K2.2</b> ■ 138 J	<b>K2.3</b> ■ 110 I	<b>K3.1</b> ■ 150 J	<b>K3.2</b> ■ 115 J
<b>K3.3</b> ■ 93 I	<b>K4.1</b> ■ 140 I	<b>K4.2</b> ■ 105 I	<b>K4.3</b> ■ 77 I	<b>K4.4</b> ■ 66 I	<b>K4.5</b> ■ 56 I	<b>K5.1</b> ■ 159 I	<b>K5.2</b> ■ 118 I	<b>K5.3</b> ■ 92 I	<b>N1.1</b> ▣ 330 J	<b>N1.2</b> ▣ 247 J	<b>N1.3</b> ▣ 166 J	<b>N2.1</b> ▣ 166 J	<b>N2.2</b> ▣ 148 J
<b>N2.3</b> ▣ 107 J	<b>N3.1</b> ■ 173 J	<b>N3.2</b> ■ 101 J	<b>N3.3</b> ▣ 52 J	<b>N4.1</b> ▣ 173 J	<b>N4.2</b> ▣ 67 J	<b>S1.1</b> ▣ 72 I	<b>S1.2</b> ▣ 64 I	<b>S2.1</b> ▣ 49 I	<b>S3.1</b> ▣ 38 I	<b>S4.1</b> ▣ 30 I			

DCON MS tolerance h6; DC ≤ 8.00 mm: CHW ±0.03×45° mm; DC > 8.00 mm: CHW ±0.05×45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S814HA2.0	2.00	0.00	6.00	7.00	57.0	4
S814HA3.0	3.00	0.08	6.00	8.00	57.0	4
S814HA4.0	4.00	0.13	6.00	11.00	57.0	4
S814HA5.0	5.00	0.13	6.00	13.00	57.0	4
S814HA6.0	6.00	0.13	6.00	13.00	57.0	4
S814HA8.0	8.00	0.13	8.00	19.00	63.0	4
S814HA10.0	10.00	0.20	10.00	22.00	72.0	4
S814HA12.0	12.00	0.20	12.00	26.00	83.0	4
S814HA16.0	16.00	0.20	16.00	32.00	92.0	4
S814HA20.0	20.00	0.30	20.00	38.00	104.0	4
S814HA25.0	25.00	0.30	25.00	45.00	121.0	4

# S814HB



## 4-Flute Solid Carbide End Mill, DIN 6535 HB Shank

Short cut length, 4-flute design provides high rigidity for general profile and plunge milling applications. The Weldon shank prevents the end mill from slipping in the toolholder. AlCrN coating improves performance and extends the tool life.

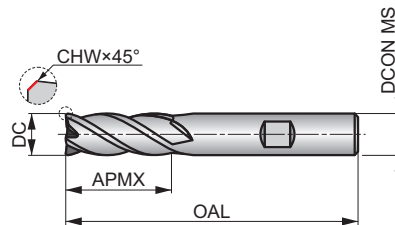

HM	N	NOF 4
	$\lambda$ 34°	$\gamma$ 9°
DIN 6535HB	AlCrN	DC h10
	DIN 6527L	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 166 J	<b>P1.2</b> ■ 186 J	<b>P1.3</b> ■ 192 J	<b>P2.1</b> ■ 142 J	<b>P2.2</b> ■ 125 J	<b>P2.3</b> ■ 111 I	<b>P3.1</b> ■ 115 J	<b>P3.2</b> ■ 93 I	<b>P3.3</b> ■ 78 I	<b>P4.1</b> ■ 68 I	<b>P4.2</b> ■ 59 I	<b>P4.3</b> ▣ 47 I	<b>M1.1</b> ■ 97 J	<b>M1.2</b> ■ 81 J
<b>M2.1</b> ■ 85 J	<b>M2.2</b> ■ 71 I	<b>M3.1</b> ▣ 79 I	<b>M3.2</b> ▣ 68 I	<b>M3.3</b> ▣ 61 I	<b>M4.1</b> ▣ 60 I	<b>K1.1</b> ■ 166 J	<b>K1.2</b> ■ 123 J	<b>K1.3</b> ■ 92 J	<b>K2.1</b> ■ 170 J	<b>K2.2</b> ■ 138 J	<b>K2.3</b> ■ 110 I	<b>K3.1</b> ■ 150 J	<b>K3.2</b> ■ 115 J
<b>K3.3</b> ■ 93 I	<b>K4.1</b> ■ 140 I	<b>K4.2</b> ■ 105 I	<b>K4.3</b> ■ 77 I	<b>K4.4</b> ■ 66 I	<b>K4.5</b> ■ 56 I	<b>K5.1</b> ■ 159 I	<b>K5.2</b> ■ 118 I	<b>K5.3</b> ■ 92 I	<b>N1.1</b> ▣ 330 J	<b>N1.2</b> ▣ 247 J	<b>N1.3</b> ▣ 166 J	<b>N2.1</b> ▣ 166 J	<b>N2.2</b> ▣ 148 J
<b>N2.3</b> ▣ 107 J	<b>N3.1</b> ■ 173 J	<b>N3.2</b> ■ 101 J	<b>N3.3</b> ▣ 52 J	<b>N4.1</b> ▣ 173 J	<b>N4.2</b> ▣ 67 J	<b>S1.1</b> ▣ 72 I	<b>S1.2</b> ▣ 64 I	<b>S2.1</b> ▣ 49 I	<b>S3.1</b> ▣ 38 I	<b>S4.1</b> ▣ 30 I			

DCON MS tolerance h6; DC ≤ 8.00 mm: CHW ±0.03×45° mm; DC > 8.00 mm: CHW ±0.05×45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S814HB2.0	2.00	0.00	6.00	7.00	57.0	4
S814HB3.0	3.00	0.08	6.00	8.00	57.0	4
S814HB4.0	4.00	0.13	6.00	11.00	57.0	4
S814HB5.0	5.00	0.13	6.00	13.00	57.0	4
S814HB6.0	6.00	0.13	6.00	13.00	57.0	4
S814HB8.0	8.00	0.13	8.00	19.00	63.0	4
S814HB10.0	10.00	0.20	10.00	22.00	72.0	4
S814HB12.0	12.00	0.20	12.00	26.00	83.0	4
S814HB16.0	16.00	0.20	16.00	32.00	92.0	4
S814HB20.0	20.00	0.30	20.00	38.00	104.0	4
S814HB25.0	25.00	0.30	25.00	45.00	121.0	4

# S716



## 4-Flute Solid Carbide End Mill

Short cut length, 4-flute design with 40° helix provides high rigidity for standard profile milling. AlCrN coating improves performance and extends the tool life.

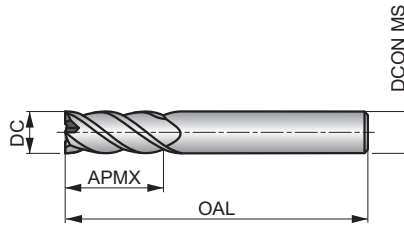

HM	N	NOF 4
	λ 40°	γ 10°
DIN 6535HA	AlCrN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 199 J	<b>P1.2</b> ■ 223 J	<b>P1.3</b> ■ 230 J	<b>P2.1</b> ■ 170 J	<b>P2.2</b> ■ 150 J	<b>P2.3</b> ■ 133 I	<b>P3.1</b> ■ 138 J	<b>P3.2</b> ■ 111 I	<b>P3.3</b> ■ 94 I	<b>P4.1</b> ■ 82 I	<b>P4.2</b> ■ 70 I	<b>M1.1</b> ■ 115 J	<b>M1.2</b> ■ 97 J	<b>M2.1</b> ■ 102 J
<b>M2.2</b> ■ 84 I	<b>M3.1</b> ■ 94 I	<b>M3.2</b> ■ 81 I	<b>K1.1</b> ■ 196 J	<b>K1.2</b> ■ 145 J	<b>K1.3</b> ■ 109 J	<b>K2.1</b> ■ 202 J	<b>K2.2</b> ■ 164 J	<b>K2.3</b> ■ 131 I	<b>K3.1</b> ■ 178 J	<b>K3.2</b> ■ 136 J	<b>K3.3</b> ■ 110 I	<b>K4.1</b> ■ 165 I	<b>K4.2</b> ■ 125 I
<b>K4.3</b> ■ 91 I	<b>K4.4</b> ■ 78 I	<b>K4.5</b> ■ 65 I	<b>K5.1</b> ■ 187 I	<b>K5.2</b> ■ 141 I	<b>K5.3</b> ■ 109 I	<b>S1.2</b> ■ 69 I	<b>S2.1</b> ■ 53 I	<b>S3.1</b> ■ 40 I	<b>S4.1</b> ■ 31 I				

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S7162.0	2.00	4.00	6.50	40.0	4
S7163.0	3.00	3.00	9.00	40.0	4
S7164.0	4.00	4.00	12.00	50.0	4
S7165.0	5.00	5.00	15.00	50.0	4
S7166.0	6.00	6.00	16.00	50.0	4
S7168.0	8.00	8.00	20.00	64.0	4
S71610.0	10.00	10.00	22.00	70.0	4
S71612.0	12.00	12.00	25.00	75.0	4
S71614.0	14.00	14.00	32.00	90.0	4
S71616.0	16.00	16.00	32.00	90.0	4
S71618.0	18.00	18.00	38.00	100.0	4
S71620.0	20.00	20.00	38.00	100.0	4


# S717



## 4-Flute Solid Carbide End Mill, Long Series

Long cut length, 4-flute design with 40° helix provides high rigidity for profile milling deep walls. AlCrN coating improves performance and extends the tool life.

HM	N	NOF 4
	40°	10°
DIN 6535HA	AlCrN	DC h9
	DORMER	

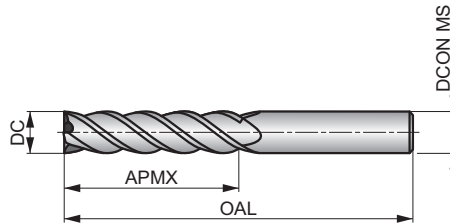

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 140 J	<b>P1.2</b> ■ 157 J	<b>P1.3</b> ■ 162 J	<b>P2.1</b> ■ 120 J	<b>P2.2</b> ■ 106 J	<b>P2.3</b> ■ 94 I	<b>P3.1</b> ■ 97 J	<b>P3.2</b> ■ 78 I	<b>P3.3</b> ■ 66 I	<b>P4.1</b> ■ 58 I	<b>P4.2</b> ■ 49 I	<b>M1.1</b> ■ 81 J	<b>M1.2</b> ■ 68 J	<b>M2.1</b> ■ 71 J
<b>M2.2</b> ■ 59 I	<b>M3.1</b> ■ 66 I	<b>M3.2</b> ■ 57 I	<b>K1.1</b> ■ 138 J	<b>K1.2</b> ■ 102 J	<b>K1.3</b> ■ 77 J	<b>K2.1</b> ■ 142 J	<b>K2.2</b> ■ 115 J	<b>K2.3</b> ■ 92 I	<b>K3.1</b> ■ 125 J	<b>K3.2</b> ■ 96 J	<b>K3.3</b> ■ 78 I	<b>K4.1</b> ■ 116 I	<b>K4.2</b> ■ 88 I
<b>K4.3</b> ■ 64 I	<b>K4.4</b> ■ 55 I	<b>K4.5</b> ■ 46 I	<b>K5.1</b> ■ 132 I	<b>K5.2</b> ■ 99 I	<b>K5.3</b> ■ 77 I	<b>N1.1</b> ▣ 249 K	<b>N1.2</b> ▣ 187 K	<b>N1.3</b> ▣ 125 K	<b>N2.1</b> ▣ 125 J	<b>N2.2</b> ▣ 112 J	<b>N2.3</b> ▣ 81 J	<b>N3.1</b> ▣ 131 J	<b>N3.2</b> ▣ 176 J
<b>N3.3</b> ▣ 39 J	<b>S1.2</b> ■ 49 I	<b>S2.1</b> ■ 37 I	<b>S3.1</b> ■ 28 I	<b>S4.1</b> ■ 22 I									

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S7173.0	3.00	3.00	19.00	60.0	4
S7174.0	4.00	4.00	19.00	60.0	4
S7175.0	5.00	5.00	19.00	60.0	4
S7176.0	6.00	6.00	31.00	75.0	4
S7178.0	8.00	8.00	31.00	75.0	4
S71710.0	10.00	10.00	31.00	75.0	4
S71712.0	12.00	12.00	50.00	100.0	4
S71714.0	14.00	14.00	57.00	125.0	4
S71716.0	16.00	16.00	57.00	125.0	4
S71718.0	18.00	18.00	57.00	125.0	4
S71720.0	20.00	20.00	57.00	125.0	4


# S718



## 4-Flute Solid Carbide End Mill, Extra Long Series

Extra long cut length, 4-flute design with 40° helix provides high rigidity for profile milling extra deep walls. AlCrN coating improves performance and extends the tool life.

HM	N	NOF 4
	40°	10°
DIN 6535HA	AlCrN	DC h9

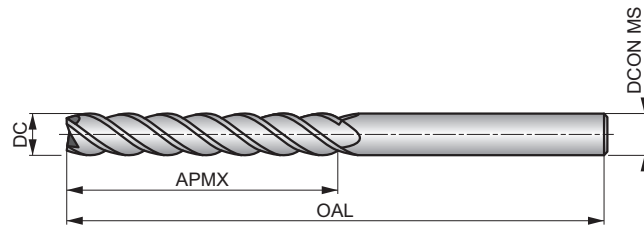

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 88 J	<b>P1.2</b> ■ 98 J	<b>P1.3</b> ■ 101 J	<b>P2.1</b> ■ 75 J	<b>P2.2</b> ■ 66 J	<b>P2.3</b> ■ 59 I	<b>P3.1</b> ■ 61 J	<b>P3.2</b> ■ 49 I	<b>P3.3</b> ■ 41 I	<b>P4.1</b> ■ 36 I	<b>P4.2</b> ■ 31 I	<b>M1.1</b> ■ 50 J	<b>M1.2</b> ■ 42 J	<b>M2.1</b> ■ 44 J
<b>M2.2</b> ■ 36 I	<b>M3.1</b> ■ 41 I	<b>M3.2</b> ■ 35 I	<b>K1.1</b> ■ 86 J	<b>K1.2</b> ■ 64 J	<b>K1.3</b> ■ 48 J	<b>K2.1</b> ■ 89 J	<b>K2.2</b> ■ 72 J	<b>K2.3</b> ■ 58 I	<b>K3.1</b> ■ 79 J	<b>K3.2</b> ■ 60 J	<b>K3.3</b> ■ 49 I	<b>K4.1</b> ■ 73 I	<b>K4.2</b> ■ 55 I
<b>K4.3</b> ■ 40 I	<b>K4.4</b> ■ 35 I	<b>K4.5</b> ■ 29 I	<b>K5.1</b> ■ 83 I	<b>K5.2</b> ■ 62 I	<b>K5.3</b> ■ 48 I	<b>N1.1</b> ▣ 178 K	<b>N1.2</b> ▣ 134 K	<b>N1.3</b> ▣ 190 K	<b>N2.1</b> ▣ 190 J	<b>N2.2</b> ▣ 180 J	<b>N2.3</b> ▣ 158 J	<b>N3.1</b> ▣ 194 J	<b>N3.2</b> ▣ 155 J
<b>N3.3</b> ▣ 28 J	<b>S1.2</b> ■ 30 I	<b>S2.1</b> ■ 23 I	<b>S3.1</b> ■ 18 I	<b>S4.1</b> ■ 14 I									

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S7183.0	3.00	3.00	25.00	100.0	4
S7184.0	4.00	4.00	31.00	100.0	4
S7185.0	5.00	5.00	31.00	100.0	4
S7186.0	6.00	6.00	38.00	100.0	4
S7188.0	8.00	8.00	41.00	100.0	4
S71810.0	10.00	10.00	57.00	125.0	4
S71812.0	12.00	12.00	75.00	150.0	4
S71814.0	14.00	14.00	75.00	150.0	4
S71816.0	16.00	16.00	75.00	150.0	4
S71818.0	18.00	18.00	75.00	150.0	4
S71820.0	20.00	20.00	75.00	150.0	4



**SOLID CARBIDE TOOLS FOR PROCESS SECURITY AND PRODUCTIVITY.  
TYPICALLY USED WITH CNC AND AUTOMATED MANUFACTURING.**

---

Material code (BMC)																				
Mill Profile																				
Number of flutes (NOF)																				
Cut length																				
Flute Helix (FHA)																				
Flute Helix (FHA)																				
Radial rake angle (GAMF)																				
Shank																				
Coating																				
Cutting diameter tolerance class (TCDC)																				
Direction																				
Basic standard group (BSG)																				



Product Family Code	<b>S739</b>	<b>S740</b>																		
PSF cutting diameters range	3.00 – 20.00	3.00 – 20.00																		
	106	107																		
<b>P</b>	P1	■	■																	
	P2	■	■																	
	P3	■	■																	
	P4	■	■																	
<b>M</b>	M1	■	■																	
	M2	■	■																	
	M3	■	■																	
	M4																			
<b>K</b>	K1	■	■																	
	K2	■	■																	
	K3	■	■																	
	K4	■	■																	
	K5	■	■																	
<b>N</b>	N1	■	■																	
	N2	■	■																	
	N3	■	■																	
	N4																			
	N5																			
<b>S</b>	S1	■	■																	
	S2	■	■																	
	S3	■	■																	
	S4	■	■																	
<b>H</b>	H1																			
	H2																			
	H3																			
	H4																			


# S739

**DORMER**



## 2-Flute Solid Carbide Chamfering End Mill, 60°

Short cut length, 2-flute design provides high rigidity and reduces vibrations. The 60° point is designed for chamfer milling on CNC machines. AlTiN coating increases tool life and improves performance.

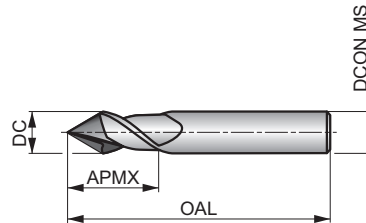

HM	N	NOF 2
	$\lambda$ 40°	$\gamma$ 10°
DIN 6335HA	AlTiN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 199 K	<b>P1.2</b> ■ 223 K	<b>P1.3</b> ■ 230 K	<b>P2.1</b> ■ 170 K	<b>P2.2</b> ■ 150 K	<b>P2.3</b> ■ 133 J	<b>P3.1</b> ■ 138 K	<b>P3.2</b> ■ 111 J	<b>P3.3</b> ■ 94 J	<b>P4.1</b> ■ 82 J	<b>P4.2</b> ■ 70 J	<b>M1.1</b> ■ 115 K	<b>M1.2</b> ■ 97 K	<b>M2.1</b> ■ 102 K
<b>M2.2</b> ■ 84 J	<b>M3.1</b> ■ 94 J	<b>M3.2</b> ■ 81 J	<b>K1.1</b> ■ 196 K	<b>K1.2</b> ■ 145 K	<b>K1.3</b> ■ 109 K	<b>K2.1</b> ■ 202 K	<b>K2.2</b> ■ 164 K	<b>K2.3</b> ■ 131 J	<b>K3.1</b> ■ 178 K	<b>K3.2</b> ■ 136 K	<b>K3.3</b> ■ 110 J	<b>K4.1</b> ■ 165 J	<b>K4.2</b> ■ 125 J
<b>K4.3</b> ■ 91 J	<b>K4.4</b> ■ 78 J	<b>K4.5</b> ■ 65 J	<b>K5.1</b> ■ 187 J	<b>K5.2</b> ■ 141 J	<b>K5.3</b> ■ 109 J	<b>N1.1</b> ■ 355 N	<b>N1.2</b> ■ 267 N	<b>N1.3</b> ■ 179 N	<b>N2.1</b> ■ 179 K	<b>N2.2</b> ■ 160 K	<b>N2.3</b> ■ 115 K	<b>N3.1</b> ■ 187 K	<b>N3.2</b> ■ 109 K
<b>N3.3</b> ■ 56 K	<b>S1.2</b> ■ 69 J	<b>S2.1</b> ■ 53 J	<b>S3.1</b> ■ 40 J	<b>S4.1</b> ■ 31 J									

DCON MS tolerance h6.

Product	KAPR	DC	DCON MS	APMX	OAL	NOF
	(°)	(mm)	(mm)	(mm)	(mm)	
S7393.0	60	3.00	3.00	9.00	40.0	2
S7394.0	60	4.00	4.00	12.00	50.0	2
S7395.0	60	5.00	5.00	15.00	50.0	2
S7396.0	60	6.00	6.00	16.00	50.0	2
S7398.0	60	8.00	8.00	20.00	64.0	2
S73910.0	60	10.00	10.00	22.00	70.0	2
S73912.0	60	12.00	12.00	25.00	75.0	2
S73916.0	60	16.00	16.00	32.00	90.0	2
S73920.0	60	20.00	20.00	38.00	100.0	2

# S740


**DORMER**



## 2-Flute Solid Carbide Chamfering End Mill, 90°

Short cut length, 2-flute design provides high rigidity and reduces vibrations. The 90° point is designed for chamfer milling on CNC machines. AlTiN coating increases tool life and improves performance.

HM	N	NOF 2
	$\lambda$ 40°	$\gamma$ 10°
DIN 6335HA	AlTiN	DC h9

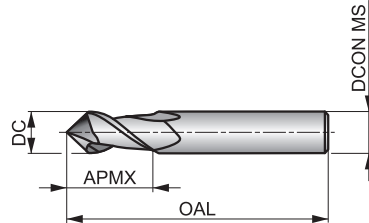

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 199 K	<b>P1.2</b> ■ 223 K	<b>P1.3</b> ■ 230 K	<b>P2.1</b> ■ 170 K	<b>P2.2</b> ■ 150 K	<b>P2.3</b> ■ 133 J	<b>P3.1</b> ■ 138 K	<b>P3.2</b> ■ 111 J	<b>P3.3</b> ■ 94 J	<b>P4.1</b> ■ 82 J	<b>P4.2</b> ■ 70 J	<b>M1.1</b> ■ 115 K	<b>M1.2</b> ■ 97 K	<b>M2.1</b> ■ 102 K
<b>M2.2</b> ■ 84 J	<b>M3.1</b> ■ 94 J	<b>M3.2</b> ■ 81 J	<b>K1.1</b> ■ 196 K	<b>K1.2</b> ■ 145 K	<b>K1.3</b> ■ 109 K	<b>K2.1</b> ■ 202 K	<b>K2.2</b> ■ 164 K	<b>K2.3</b> ■ 131 J	<b>K3.1</b> ■ 178 K	<b>K3.2</b> ■ 136 K	<b>K3.3</b> ■ 110 J	<b>K4.1</b> ■ 165 J	<b>K4.2</b> ■ 125 J
<b>K4.3</b> ■ 91 J	<b>K4.4</b> ■ 78 J	<b>K4.5</b> ■ 65 J	<b>K5.1</b> ■ 187 J	<b>K5.2</b> ■ 141 J	<b>K5.3</b> ■ 109 J	<b>N1.1</b> ■ 355 N	<b>N1.2</b> ■ 267 N	<b>N1.3</b> ■ 179 N	<b>N2.1</b> ■ 179 K	<b>N2.2</b> ■ 160 K	<b>N2.3</b> ■ 115 K	<b>N3.1</b> ■ 187 K	<b>N3.2</b> ■ 109 K
<b>N3.3</b> ■ 56 K	<b>S1.2</b> ■ 69 J	<b>S2.1</b> ■ 53 J	<b>S3.1</b> ■ 40 J	<b>S4.1</b> ■ 31 J									

DCON MS tolerance h6.

Product	KAPR	DC	DCON MS	APMX	OAL	NOF
	(°)	(mm)	(mm)	(mm)	(mm)	
S7403.0	90	3.00	3.00	9.00	40.0	2
S7404.0	90	4.00	4.00	12.00	50.0	2
S7405.0	90	5.00	5.00	15.00	50.0	2
S7406.0	90	6.00	6.00	16.00	50.0	2
S7408.0	90	8.00	8.00	20.00	64.0	2
S74010.0	90	10.00	10.00	22.00	70.0	2
S74012.0	90	12.00	12.00	25.00	75.0	2
S74016.0	90	16.00	16.00	32.00	90.0	2
S74020.0	90	20.00	20.00	38.00	100.0	2

Material code (BMC)	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM		
Mill Profile	NRA	NRA	W	W	W	W	W	W	W	N		
Number of flutes (NOF)	NOF 4	NOF 4	NOF 1	NOF 2	NOF 2	NOF 2	NOF 3	NOF 3	NOF 3	NOF 4-6		
Cut length												
Flute Helix (FHA)	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 25°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 25°		
Flute Helix (FHA)	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 25°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 25°		
Radial rake angle (GAMF)	$\gamma$ 10°	$\gamma$ 10°	$\gamma$ 20°	$\gamma$ 20°	$\gamma$ 20°	$\gamma$ 20°	$\gamma$ 13°	$\gamma$ 15°	$\gamma$ 13°	$\gamma$ 0°		
Shank	DIN 6535HA	DIN 6535HB	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA		
Coating	AlCN	AlCN	Hi	Hi	Hi	Hi	Bright	Bright	Bright	TiSiN		
Cutting diameter tolerance class (TDC)	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9		
Direction												
Basic standard group (BSG)	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER		
Product Family Code	S765	S765HB	S637	S610	S611	S638	S650	S654	S614	S536		
PSF cutting diameters range	6.00 – 20.00	6.00 – 20.00	2.00 – 12.00	2.00 – 20.00	3.00 – 20.00	6.20 – 20.30	1.00 – 20.00	6.00 – 20.00	3.00 – 16.00	6.00 – 12.00		
	110	111	112	113	114	115	116	117	118	119		
P	P1	■	■									
	P2	■	■									
	P3	■	■									
	P4	■	■									
M	M1	■	■									
	M2	■	■									
	M3	■	■									
	M4											
K	K1	■	■									
	K2	■	■									
	K3	■	■									
	K4	■	■									
	K5	■	■									
N	N1			■	■	■	■	■	■			
	N2			■	■	■	■	■	■			
	N3			■	■	■	■	■	■			
	N4			■	■	■	■	■	■			
	N5											
S	S1	■	■									
	S2	■	■									
	S3	■	■									
	S4	■	■									
H	H1									■		
	H2									■		
	H3									■		
	H4									■		


# S765



## 4-Flute Solid Carbide Roughing End Mill, DIN 6535 HA Shank

Short cut length, 4-flute design with 40° helix and differential pitch to reduce vibrations. The NRA profile is designed to break chips for efficient roughing applications. AlCrN coating improves performance and extends the tool life. Also suited for slotting and trochoidal roughing operation.

HM	NRA	NOF 4#
	λ 40°	γ 10°
DIN 6535HA	AlCrN	DC h9
	DORMER	

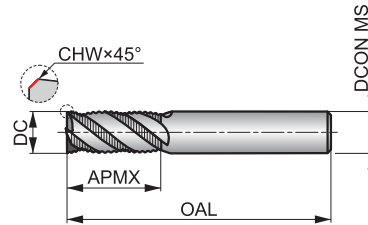

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 211 J	<b>P1.2</b> ■ 236 J	<b>P1.3</b> ■ 243 J	<b>P2.1</b> ■ 180 J	<b>P2.2</b> ■ 158 J	<b>P2.3</b> ■ 140 J	<b>P3.1</b> ■ 146 J	<b>P3.2</b> ■ 117 J	<b>P3.3</b> ■ 99 J	<b>P4.1</b> ■ 86 J	<b>P4.2</b> ■ 74 J	<b>M1.1</b> ■ 122 J	<b>M1.2</b> ■ 103 J	<b>M2.1</b> ■ 108 J
<b>M2.2</b> ■ 89 J	<b>M3.1</b> ■ 100 J	<b>M3.2</b> ■ 86 J	<b>K1.1</b> ■ 208 J	<b>K1.2</b> ■ 154 J	<b>K1.3</b> ■ 116 J	<b>K2.1</b> ■ 214 J	<b>K2.2</b> ■ 174 J	<b>K2.3</b> ■ 139 J	<b>K3.1</b> ■ 189 J	<b>K3.2</b> ■ 145 J	<b>K3.3</b> ■ 117 J	<b>K4.1</b> ■ 176 J	<b>K4.2</b> ■ 132 J
<b>K4.3</b> ■ 97 J	<b>K4.4</b> ■ 83 I	<b>K4.5</b> ■ 69 I	<b>K5.1</b> ■ 199 J	<b>K5.2</b> ■ 149 J	<b>K5.3</b> ■ 116 J	<b>S1.2</b> ■ 72 J	<b>S2.1</b> ■ 56 I	<b>S3.1</b> ■ 42 I	<b>S4.1</b> ■ 33 I				

DCON MS tolerance h6; CHW ±0.02×45° mm.

Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S7656.0	6.00	0.10	6.00	16.00	50.0	4
S7658.0	8.00	0.20	8.00	20.00	64.0	4
S76510.0	10.00	0.20	10.00	22.00	70.0	4
S76512.0	12.00	0.20	12.00	26.00	75.0	4
S76514.0	14.00	0.30	14.00	32.00	90.0	4
S76516.0	16.00	0.30	16.00	32.00	90.0	4
S76518.0	18.00	0.30	18.00	38.00	100.0	4
S76520.0	20.00	0.40	20.00	38.00	100.0	4



# S765HB



## 4-Flute Solid Carbide Roughing End Mill, DIN 6535 HB Shank

Short cut length, 4-flute design with 40° helix and differential pitch to reduce vibrations. The NRA profile is designed to break chips for efficient roughing applications. The Weldon shank prevents the end mill from slipping in the toolholder. AlCrN coating. Also suited for slotting and trochoidal roughing operation.

HM	NRA	NOF 4 $\pm$
	$\lambda$ 40°	$\gamma$ 10°
DIN 6535HB	AlCrN	DC h9

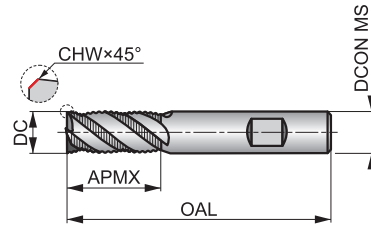

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 211 J	<b>P1.2</b> ■ 236 J	<b>P1.3</b> ■ 243 J	<b>P2.1</b> ■ 180 J	<b>P2.2</b> ■ 158 J	<b>P2.3</b> ■ 140 J	<b>P3.1</b> ■ 146 J	<b>P3.2</b> ■ 117 J	<b>P3.3</b> ■ 99 J	<b>P4.1</b> ■ 86 J	<b>P4.2</b> ■ 74 J	<b>M1.1</b> ■ 122 J	<b>M1.2</b> ■ 103 J	<b>M2.1</b> ■ 108 J
<b>M2.2</b> ■ 89 J	<b>M3.1</b> ■ 100 J	<b>M3.2</b> ■ 86 J	<b>K1.1</b> ■ 208 J	<b>K1.2</b> ■ 154 J	<b>K1.3</b> ■ 116 J	<b>K2.1</b> ■ 214 J	<b>K2.2</b> ■ 174 J	<b>K2.3</b> ■ 139 J	<b>K3.1</b> ■ 189 J	<b>K3.2</b> ■ 145 J	<b>K3.3</b> ■ 117 J	<b>K4.1</b> ■ 176 J	<b>K4.2</b> ■ 132 J
<b>K4.3</b> ■ 97 J	<b>K4.4</b> ■ 83 I	<b>K4.5</b> ■ 69 I	<b>K5.1</b> ■ 199 J	<b>K5.2</b> ■ 149 J	<b>K5.3</b> ■ 116 J	<b>S1.2</b> ■ 72 J	<b>S2.1</b> ■ 56 I	<b>S3.1</b> ■ 42 I	<b>S4.1</b> ■ 33 I				

DCON MS tolerance h6; CHW  $\pm 0.02 \times 45^\circ$  mm.

Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S765HB6.0	6.00	0.10	6.00	16.00	50.0	4
S765HB8.0	8.00	0.20	8.00	20.00	64.0	4
S765HB10.0	10.00	0.20	10.00	22.00	70.0	4
S765HB12.0	12.00	0.20	12.00	26.00	75.0	4
S765HB14.0	14.00	0.30	14.00	32.00	90.0	4
S765HB16.0	16.00	0.30	16.00	32.00	90.0	4
S765HB18.0	18.00	0.30	18.00	38.00	100.0	4
S765HB20.0	20.00	0.40	20.00	38.00	100.0	4


# S637



## Single-Flute Solid Carbide End Mill

Short cut length, 1-flute design provides high performance when slotting and routing. The S637, with high hook geometry, is designed for high speed routing in thin walled non-ferrous materials. Polished surface prevents workpiece material from sticking to the cutting edge.

HM	W	NOF 1
	$\lambda$ 25°	$\gamma$ 20°
DIN 6535HA	Hi	DC h9
	DORMER	

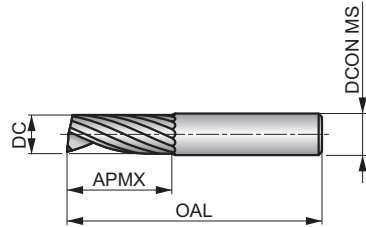

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>N1.1</b> ■ 709 R	<b>N1.2</b> ■ 533 R	<b>N1.3</b> ■ 357 R	<b>N2.1</b> ■ 357 P	<b>N2.2</b> ■ 320 P	<b>N2.3</b> ■ 229 P	<b>N3.1</b> ■ 373 P	<b>N3.2</b> ■ 219 P	<b>N3.3</b> ■ 112 P	<b>N4.1</b> ■ 373 S	<b>N4.2</b> ■ 144 S
------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S6372.0	2.00	2.00	10.00	40.0	1
S6373.0	3.00	3.00	12.00	40.0	1
S6374.0	4.00	4.00	15.00	50.0	1
S6375.0	5.00	5.00	16.00	50.0	1
S6376.0	6.00	6.00	20.00	60.0	1
S6378.0	8.00	8.00	22.00	63.0	1
S63710.0	10.00	10.00	25.00	72.0	1
S63712.0	12.00	12.00	30.00	83.0	1


# S610



## 2-Flute Solid Carbide End Mill

Short cut length, 2-flute design provides high rigidity for milling standard slots and profiling. The S610, with high hook geometry, is designed for high performance machining in non-ferrous materials. Polished surface prevents workpiece material from sticking to the cutting edge.

HM	W	NOF 2
	$\lambda$ 30°	$\gamma$ 20°
DIN 6535HA	Hi	DC h9
	DORMER	

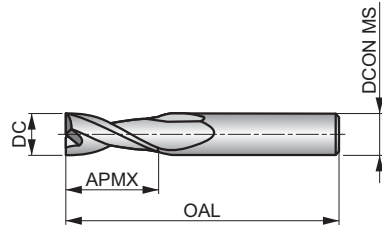

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>N1.1</b> ■ 709 P	<b>N1.2</b> ■ 533 P	<b>N1.3</b> ■ 357 P	<b>N2.1</b> ■ 357 O	<b>N2.2</b> ■ 320 O	<b>N2.3</b> ■ 229 O	<b>N3.1</b> ■ 373 O	<b>N3.2</b> ■ 219 O	<b>N3.3</b> ■ 112 O	<b>N4.1</b> ■ 373 R	<b>N4.2</b> ■ 144 R
------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------

DCON MS tolerance h6; RE ±0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S6102.0	2.00	0.10	4.00	6.50	40.0	2
S6103.0XD3	3.00	0.10	3.00	9.00	40.0	2
S6103.0XD6	3.00	0.10	6.00	9.00	50.0	2
S6104.0XD4	4.00	0.10	4.00	12.00	50.0	2
S6104.0XD6	4.00	0.10	6.00	12.00	50.0	2
S6105.0	5.00	0.10	6.00	15.00	50.0	2
S6106.0	6.00	0.10	6.00	20.00	50.0	2
S6108.0	8.00	0.10	8.00	20.00	64.0	2
S61010.0	10.00	0.10	10.00	22.00	75.0	2
S61012.0	12.00	0.10	12.00	25.00	75.0	2
S61014.0	14.00	0.10	14.00	32.00	90.0	2
S61016.0	16.00	0.10	16.00	32.00	90.0	2
S61020.0	20.00	0.10	20.00	38.00	100.0	2

# S611



## 2-Flute Solid Carbide End Mill, Extra Long Reach

Short cut length, 2-flute design with neck recess provides high rigidity for milling and profiling in hard to reach areas. The S611, with high hook geometry, is designed for high performance machining in non-ferrous materials. Polished surface prevents workpiece material from sticking to the cutting edge.

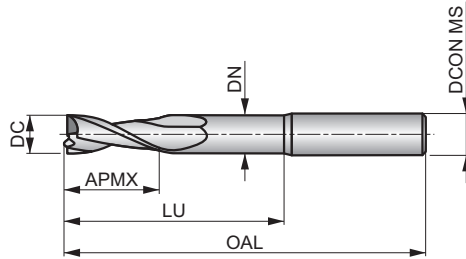

HM	W	NOF 2
	$\lambda$ 30°	$\gamma$ 20°
DIN 6535HA	Hi	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>N1.1</b> ■ 638 P	<b>N1.2</b> ■ 480 P	<b>N1.3</b> ■ 321 P	<b>N2.1</b> ■ 321 O	<b>N2.2</b> ■ 288 O	<b>N2.3</b> ■ 206 O	<b>N3.1</b> ■ 336 O	<b>N3.2</b> ■ 197 O	<b>N3.3</b> ■ 101 O	<b>N4.1</b> ■ 336 R	<b>N4.2</b> ■ 130 R
------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------

DCON MS tolerance h6; RE ±0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S6113.0XD3	3.00	0.10	3.00	9.00	40.0	2	15.00	2.80
S6113.0XD6	3.00	0.10	6.00	9.00	50.0	2	15.00	2.80
S6114.0XD4	4.00	0.10	4.00	12.00	50.0	2	20.00	3.70
S6114.0XD6	4.00	0.10	6.00	12.00	50.0	2	20.00	3.70
S6115.0	5.00	0.10	6.00	15.00	50.0	2	20.00	4.60
S6116.0	6.00	0.10	6.00	16.00	80.0	2	40.00	5.50
S6118.0	8.00	0.10	8.00	20.00	80.0	2	40.00	7.40
S61110.0	10.00	0.10	10.00	22.00	100.0	2	60.00	9.20
S61112.0	12.00	0.10	12.00	25.00	100.0	2	60.00	11.00
S61114.0	14.00	0.10	14.00	32.00	125.0	2	75.00	13.00
S61116.0	16.00	0.10	16.00	32.00	125.0	2	75.00	15.00
S61120.0	20.00	0.10	20.00	38.00	125.0	2	75.00	19.00

# S638



## 2-Flute Solid Carbide End Mill, Extra Long Reach

Extra short cut length, 2-flute reduced shank provides clearance when machining against deep walls. The S638, with high hook geometry, is designed for high speed machining in non-ferrous materials. Polished surface prevents workpiece material from sticking to the cutting edge.

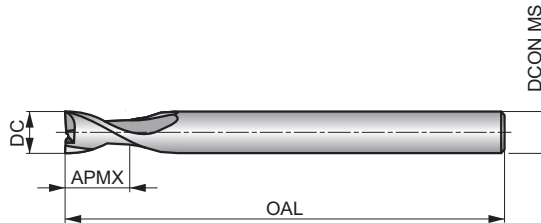

HM	W	NOF 2
	$\lambda$ 30°	$\gamma$ 20°
DIN 6535HA	Hi	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>N1.1</b>	<b>N1.2</b>	<b>N1.3</b>	<b>N2.1</b>	<b>N2.2</b>	<b>N2.3</b>	<b>N3.1</b>	<b>N3.2</b>	<b>N3.3</b>	<b>N4.1</b>	<b>N4.2</b>
709 N	533 N	357 N	357 N	320 N	229 N	373 N	219 N	112 N	373 0	144 0

Reduced shank; DCON MS tolerance h6; RE ±0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
<b>S6386.2</b>	6.20	0.10	6.00	8.00	100.0	2
<b>S6388.2</b>	8.20	0.10	8.00	10.00	100.0	2
<b>S63810.3</b>	10.30	0.10	10.00	14.00	125.0	2
<b>S63812.3</b>	12.30	0.10	12.00	16.00	125.0	2
<b>S63816.3</b>	16.30	0.10	16.00	20.00	125.0	2
<b>S63820.3</b>	20.30	0.10	20.00	25.00	125.0	2

# S650




## 3-Flute Solid Carbide End Mill

Short cut length, 3-flute with differential pitch is designed to reduce vibrations, spindle load and improve surface finish when milling. The single chip divider helps to break swarf into manageable pieces for a better evacuation in non-ferrous materials.

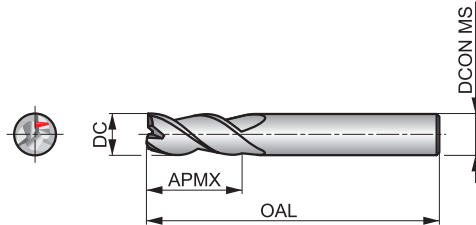

HM	W	NOF 3#
	$\lambda$ 40°	$\gamma$ 13°
DIN 6535HA	Bright	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>N1.1</b> ■ 780 O	<b>N1.2</b> ■ 608 O	<b>N1.3</b> ■ 393 O	<b>N2.1</b> ■ 393 N	<b>N2.2</b> ■ 352 N	<b>N2.3</b> ■ 252 N	<b>N3.1</b> ■ 410 N	<b>N3.2</b> ■ 241 N	<b>N3.3</b> ■ 123 N	<b>N4.1</b> ■ 410 P	<b>N4.2</b> ■ 158 P
------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S6501.0	1.00	4.00	3.00	40.0	3
S6501.5	1.50	4.00	4.50	40.0	3
S6502.0	2.00	4.00	6.50	40.0	3
S6502.5	2.50	4.00	6.50	40.0	3
S6503.0XD3	3.00	3.00	9.00	40.0	3
S6503.0XD6	3.00	6.00	9.00	50.0	3
S6504.0XD4	4.00	4.00	12.00	50.0	3
S6504.0XD6	4.00	6.00	12.00	50.0	3
S6505.0	5.00	6.00	15.00	50.0	3
S6506.0	6.00	6.00	16.00	50.0	3
S6508.0	8.00	8.00	20.00	64.0	3
S65010.0	10.00	10.00	22.00	70.0	3
S65012.0	12.00	12.00	25.00	75.0	3
S65014.0	14.00	14.00	32.00	90.0	3
S65016.0	16.00	16.00	32.00	90.0	3
S65020.0 <sup>1)</sup>	20.00	20.00	38.00	100.0	3


<sup>1)</sup> No differential pitch and chip divider.

# S654



## 3-Flute Solid Carbide Roughing End Mill, Long Reach

Short cut length, 3-flute roughing design with neck recess and differential pitch to reduce vibrations and maximize productivity and tool life. The S654, with NRA profile, breaks the swarf into small manageable pieces. It is designed for high performance roughing in non-ferrous materials.

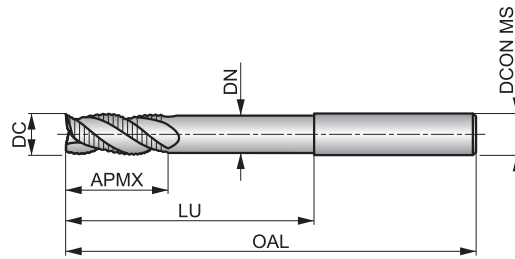

HM	W NRA	NOF 3#
	40°	15°
DIN 6535HA	Bright	DC h9
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>N1.1</b> ■ 709 O	<b>N1.2</b> ■ 533 O	<b>N1.3</b> ■ 357 O	<b>N2.1</b> ■ 357 N	<b>N2.2</b> ■ 320 N	<b>N2.3</b> ■ 229 N	<b>N3.1</b> ■ 373 N	<b>N3.2</b> ■ 219 N	<b>N3.3</b> ■ 112 N	<b>N4.1</b> ■ 373 P	<b>N4.2</b> ■ 144 P
------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------

DCON MS tolerance h6; RE ±0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
<b>S6546.0</b>	6.00	0.10	6.00	13.00	75.0	3	40.00	5.50
<b>S6548.0</b>	8.00	0.10	8.00	20.00	75.0	3	40.00	7.40
<b>S65410.0</b>	10.00	0.10	10.00	22.00	100.0	3	60.00	9.20
<b>S65412.0</b>	12.00	0.12	12.00	26.00	100.0	3	60.00	11.00
<b>S65416.0</b>	16.00	0.16	16.00	32.00	125.0	3	75.00	15.00
<b>S65420.0</b>	20.00	0.20	20.00	40.00	150.0	3	100.00	19.00

# S614



## 3-Flute Solid Carbide End Mill, Extra Long Series

Extra long cut length, 3-flute design for light profiling applications in hard to reach areas. The S614, with high hook geometry, is designed for high performance machining in non-ferrous materials.

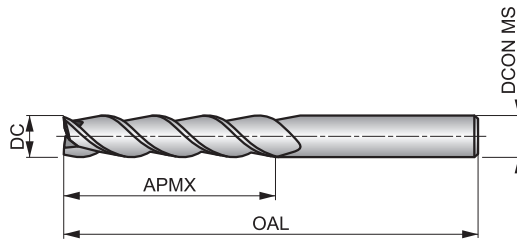

HM	W	NOF 3
	$\lambda$ 40°	$\gamma$ 13°
DIN 6535HA	Bright	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>N1.1</b> ■ 638 G	<b>N1.2</b> ■ 480 G	<b>N1.3</b> ■ 321 G	<b>N2.1</b> ■ 321 F	<b>N2.2</b> ■ 288 F	<b>N2.3</b> ■ 206 F	<b>N3.1</b> ■ 336 F	<b>N3.2</b> ■ 197 F	<b>N3.3</b> ■ 101 F	<b>N4.1</b> ■ 336 I	<b>N4.2</b> ■ 130 I
------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S6143.0XD3	3.00	3.00	19.00	60.0	3
S6143.0XD6	3.00	6.00	19.00	75.0	3
S6144.0XD4	4.00	4.00	19.00	60.0	3
S6144.0XD6	4.00	6.00	19.00	75.0	3
S6145.0	5.00	6.00	19.00	75.0	3
S6146.0	6.00	6.00	31.00	75.0	3
S6148.0	8.00	8.00	41.00	100.0	3
S61410.0	10.00	10.00	50.00	100.0	3
S61412.0	12.00	12.00	50.00	100.0	3
S61414.0	14.00	14.00	57.00	125.0	3
S61416.0	16.00	16.00	57.00	125.0	3


# S536



## High Feed, Multi-Flute Solid Carbide Corner Radius End Mill

Extra short cut length, 4 or 6 flute design with corner radius, 25° helix and specific geometry for high feed machining in hardened materials up to 63HRC. TiSiN coating increases tool life and improves performance.

HM	N	NOF 4-6
	λ 25°	γ 0°
DIN 6535HA	TiSiN	DC h9
	DORMER	

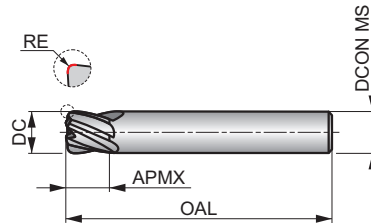

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b>	<b>H2.1</b>	<b>H2.2</b>	<b>H3.1</b>	<b>H3.2</b>	<b>H4.1</b>	<b>H4.2</b>
■ 205 E	■ 122 E	■ 104 D	■ 135 E	■ 111 E	■ 86 D	■ 73 D

DCON MS tolerance h6; RE ±0.01 mm.

Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S5366.0XR1.0	6.00	1.00	6.00	6.00	60.0	4
S5368.0XR2.0	8.00	2.00	8.00	8.00	64.0	6
S53610.0XR2.0	10.00	2.00	10.00	10.00	75.0	6
S53612.0XR2.0	12.00	2.00	12.00	12.00	75.0	6

Material code (BMC)	HM	HM	HM	HM									
Mill Profile	N	FS	N	FS									
Number of flutes (NOF)	NOF 5	NOF 5	NOF 5	NOF 5									
Cut length													
Flute Helix (FHA)	$\lambda \neq$	$\lambda \neq$	$\lambda \neq$	$\lambda \neq$									
Radial rake angle (GAMF)	$\gamma 10^\circ$	$\gamma 10^\circ$	$\gamma 10^\circ$	$\gamma 10^\circ$									
Shank	 DIN 6535HB	 DIN 6535HB	 DIN 6535HB	 DIN 6535HB									
Cutting diameter tolerance class (TCDC)	DC h9	DC h9	DC h9	DC h9									
Coating	AICN	AICN	AICN	AICN									
Direction													
Basic standard group (BSG)	DORNER	DORNER	DORNER	DORNER									
Cooling (CSP)													

Product Family Code **S770HB S771HB S772HB S773HB**

PSF cutting diameters range 10.00 – 20.00 10.00 – 20.00 10.00 – 20.00 10.00 – 20.00

122 123 124 125


<b>P</b>	P1	■	■	■	■								
	P2	■	■	■	■								
	P3	■	■	■	■								
	P4	■	■	■	■								
<b>M</b>	M1	■	■	■	■								
	M2	■	■	■	■								
	M3	■	■	■	■								
	M4												
<b>K</b>	K1	■	■	■	■								
	K2	■	■	■	■								
	K3	■	■	■	■								
	K4	■	■	■	■								
	K5	■	■	■	■								
<b>N</b>	N1												
	N2												
	N3												
	N4												
	N5												
<b>S</b>	S1	■	■	■	■								
	S2	■	■	■	■								
	S3	■	■	■	■								
	S4	■	■	■	■								
<b>H</b>	H1												
	H2												
	H3												
	H4												

# S770HB



## 5-Flute Solid Carbide End Mill

Short cut length, 5-flute design with unequal helix to reduce vibrations especially when using the cutter in dynamic milling strategies. AlCrN coating improves performance and extends the tool life. Suited for trochoidal and shoulder milling, ramping and helicoidal interpolation milling.

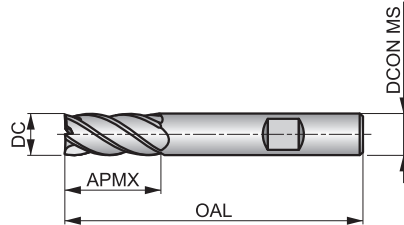

HM	N	NOF 5
	$\lambda \neq$	$\gamma$ 10°
DIN 6535HB	AlCrN	DC h9
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 211 l	<b>P1.2</b> ■ 236 l	<b>P1.3</b> ■ 243 l	<b>P2.1</b> ■ 180 l	<b>P2.2</b> ■ 158 l	<b>P2.3</b> ■ 140 l	<b>P3.1</b> ■ 146 l	<b>P3.2</b> ■ 117 l	<b>P3.3</b> ■ 99 l	<b>P4.1</b> ■ 86 l	<b>P4.2</b> ■ 74 l	<b>M1.1</b> ■ 122 l	<b>M1.2</b> ■ 103 l	<b>M2.1</b> ■ 108 l
<b>M2.2</b> ■ 89 l	<b>M3.1</b> ■ 100 l	<b>M3.2</b> ■ 86 l	<b>K1.1</b> ■ 208 l	<b>K1.2</b> ■ 154 l	<b>K1.3</b> ■ 116 l	<b>K2.1</b> ■ 214 l	<b>K2.2</b> ■ 174 l	<b>K2.3</b> ■ 139 l	<b>K3.1</b> ■ 189 l	<b>K3.2</b> ■ 145 l	<b>K3.3</b> ■ 117 l	<b>K4.1</b> ■ 176 l	<b>K4.2</b> ■ 132 l
<b>K4.3</b> ■ 97 l	<b>K4.4</b> ■ 83 G	<b>K4.5</b> ■ 69 G	<b>K5.1</b> ■ 199 l	<b>K5.2</b> ■ 149 l	<b>K5.3</b> ■ 116 l	<b>S1.2</b> ■ 72 l	<b>S2.1</b> ■ 56 G	<b>S3.1</b> ■ 42 G	<b>S4.1</b> ■ 33 G				

DCON MS tolerance h6; RE ±0.01 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
<b>S770HB10.0</b>	10.00	0.20	10.00	22.00	72.0	5
<b>S770HB12.0</b>	12.00	0.30	12.00	26.00	83.0	5
<b>S770HB16.0</b>	16.00	0.30	16.00	32.00	92.0	5
<b>S770HB20.0</b>	20.00	0.30	20.00	38.00	104.0	5

# S771HB



## 5-Flute Solid Carbide End Mill, Chip Dividers and Through Coolant

Short cut length, 5-flute design with neck recess and unequal helix helps to reduce vibrations especially when using the cutter in dynamic milling strategies. AlCrN coating improves performance and extends the tool life. Chip divider and through coolant improve chip evacuation in pocketing operation.

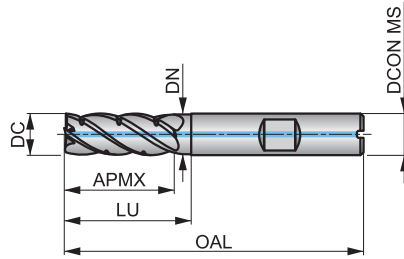

<b>HM</b>	<b>FS</b>	<b>NOF 5</b>
	$\lambda \neq$	$\gamma 10^\circ$
<b>DIN 6535HB</b>	<b>AlCrN</b>	<b>DC h9</b>
	<b>DORMER</b>	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 222 J	<b>P1.2</b> ■ 248 J	<b>P1.3</b> ■ 255 J	<b>P2.1</b> ■ 189 J	<b>P2.2</b> ■ 166 J	<b>P2.3</b> ■ 147 I	<b>P3.1</b> ■ 153 J	<b>P3.2</b> ■ 123 I	<b>P3.3</b> ■ 104 I	<b>P4.1</b> ■ 90 I	<b>P4.2</b> ■ 78 I	<b>M1.1</b> ■ 128 I	<b>M1.2</b> ■ 108 I	<b>M2.1</b> ■ 113 I
<b>M2.2</b> ■ 93 I	<b>M3.1</b> ■ 105 I	<b>M3.2</b> ■ 90 I	<b>K1.1</b> ■ 218 J	<b>K1.2</b> ■ 162 J	<b>K1.3</b> ■ 122 J	<b>K2.1</b> ■ 225 J	<b>K2.2</b> ■ 183 J	<b>K2.3</b> ■ 146 I	<b>K3.1</b> ■ 198 J	<b>K3.2</b> ■ 152 I	<b>K3.3</b> ■ 123 I	<b>K4.1</b> ■ 185 I	<b>K4.2</b> ■ 139 I
<b>K4.3</b> ■ 102 I	<b>K4.4</b> ■ 87 I	<b>K4.5</b> ■ 72 I	<b>K5.1</b> ■ 209 I	<b>K5.2</b> ■ 156 I	<b>K5.3</b> ■ 122 I	<b>S1.2</b> ■ 76 I	<b>S2.1</b> ■ 59 I	<b>S3.1</b> ■ 44 G	<b>S4.1</b> ■ 35 G				

DCON MS tolerance h6; RE ±0.01 mm.

Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
<b>S771HB10.0</b>	10.00	0.20	10.00	25.00	72.0	5	30.00	9.70
<b>S771HB12.0</b>	12.00	0.20	12.00	30.00	83.0	5	38.00	11.70
<b>S771HB16.0</b>	16.00	0.30	16.00	39.00	92.0	5	44.00	15.70
<b>S771HB20.0</b>	20.00	0.30	20.00	48.00	104.0	5	54.00	19.70


# S772HB



## 5-Flute Solid Carbide End Mill, Long Series

Long cut length, 5-flute design with unequal helix to reduce vibrations especially when using the cutter in dynamic milling strategies. AlCrN coating improves performance and extends the tool life. Suited for trochoidal and shoulder milling, ramping and helicoidal interpolation milling.

HM	N	NOF 5
	$\lambda \neq$	$\gamma$ 10°
DIN 6535HB	AlCrN	DC h9

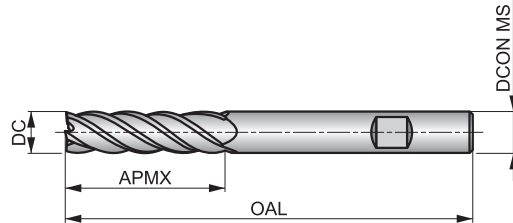

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 148 G	<b>P1.2</b> ■ 165 G	<b>P1.3</b> ■ 170 G	<b>P2.1</b> ■ 126 G	<b>P2.2</b> ■ 111 G	<b>P2.3</b> ■ 98 F	<b>P3.1</b> ■ 102 G	<b>P3.2</b> ■ 82 F	<b>P3.3</b> ■ 69 F	<b>P4.1</b> ■ 60 F	<b>P4.2</b> ■ 52 F	<b>M1.1</b> ■ 85 G	<b>M1.2</b> ■ 72 G	<b>M2.1</b> ■ 76 G
<b>M2.2</b> ■ 62 G	<b>M3.1</b> ■ 70 G	<b>M3.2</b> ■ 60 G	<b>K1.1</b> ■ 146 G	<b>K1.2</b> ■ 108 G	<b>K1.3</b> ■ 81 G	<b>K2.1</b> ■ 150 G	<b>K2.2</b> ■ 122 G	<b>K2.3</b> ■ 97 F	<b>K3.1</b> ■ 132 G	<b>K3.2</b> ■ 102 G	<b>K3.3</b> ■ 82 F	<b>K4.1</b> ■ 123 F	<b>K4.2</b> ■ 92 F
<b>K4.3</b> ■ 68 F	<b>K4.4</b> ■ 58 G	<b>K4.5</b> ■ 48 G	<b>K5.1</b> ■ 139 F	<b>K5.2</b> ■ 104 F	<b>K5.3</b> ■ 81 F	<b>S1.2</b> ■ 50 F	<b>S2.1</b> ■ 39 F	<b>S3.1</b> ■ 29 F	<b>S4.1</b> ■ 23 F				

DCON MS tolerance h6; RE ±0.01 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
<b>S772HB10.0</b>	10.00	0.20	10.00	38.00	100.0	5
<b>S772HB12.0</b>	12.00	0.30	12.00	45.00	100.0	5
<b>S772HB16.0</b>	16.00	0.30	16.00	55.00	125.0	5
<b>S772HB20.0</b>	20.00	0.30	20.00	65.00	125.0	5

# S773HB



## 5-Flute Solid Carbide End Mill, Chip Dividers, Through Coolant, Long Series

Long cut length, 5-flute design with neck recess and unequal helix helps to reduce vibrations especially when using the cutter in dynamic milling strategies. AlCrN coating improves performance and extends the tool life. Chip divider and through coolant improve chip evacuation in pocketing operations.

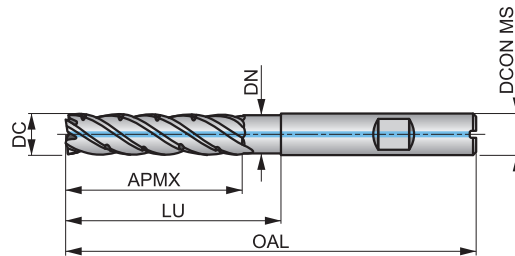

HM	FS	NOF 5
	$\lambda \neq$	$\gamma 10^\circ$
DIN 6535HB	AlCrN	DC h9
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 155 G	<b>P1.2</b> ■ 173 G	<b>P1.3</b> ■ 179 G	<b>P2.1</b> ■ 132 G	<b>P2.2</b> ■ 117 G	<b>P2.3</b> ■ 103 F	<b>P3.1</b> ■ 107 G	<b>P3.2</b> ■ 86 F	<b>P3.3</b> ■ 72 F	<b>P4.1</b> ■ 63 F	<b>P4.2</b> ■ 55 F	<b>M1.1</b> ■ 89 F	<b>M1.2</b> ■ 76 F	<b>M2.1</b> ■ 80 F
<b>M2.2</b> ■ 65 F	<b>M3.1</b> ■ 74 F	<b>M3.2</b> ■ 63 F	<b>K1.1</b> ■ 153 G	<b>K1.2</b> ■ 113 G	<b>K1.3</b> ■ 85 G	<b>K2.1</b> ■ 158 G	<b>K2.2</b> ■ 128 G	<b>K2.3</b> ■ 102 F	<b>K3.1</b> ■ 139 G	<b>K3.2</b> ■ 107 G	<b>K3.3</b> ■ 86 F	<b>K4.1</b> ■ 129 F	<b>K4.2</b> ■ 97 F
<b>K4.3</b> ■ 71 F	<b>K4.4</b> ■ 61 F	<b>K4.5</b> ■ 50 F	<b>K5.1</b> ■ 146 F	<b>K5.2</b> ■ 109 F	<b>K5.3</b> ■ 85 F	<b>S1.2</b> ■ 53 F	<b>S2.1</b> ■ 41 F	<b>S3.1</b> ■ 30 F	<b>S4.1</b> ■ 24 F				

DCON MS tolerance h6; RE ±0.01 mm.

Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
<b>S773HB10.0</b>	10.00	0.20	10.00	42.00	100.0	5	52.00	9.70
<b>S773HB12.0</b>	12.00	0.20	12.00	42.00	100.0	5	54.00	11.70
<b>S773HB16.0</b>	16.00	0.30	16.00	60.00	125.0	5	68.00	15.70
<b>S773HB20.0</b>	20.00	0.30	20.00	67.00	125.0	5	75.00	19.70

Material code (BMC)	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM
Mill Profile	N	N	N	N	N	N	N	N	N	N	W	N	N
Number of flutes (NOF)													
Cut length													
Flute Helix (FHA)	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ ≠	$\lambda$ ≠	$\lambda$ 40°	$\lambda$ ≠	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 45°	$\lambda$ 40°
Flute Helix (FHA)	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ ≠	$\lambda$ ≠	$\lambda$ 40°	$\lambda$ ≠	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 40°	$\lambda$ 45°	$\lambda$ 40°
Radial rake angle (GAMF)	$\gamma$ 10°	$\gamma$ 10°	$\gamma$ 10°	$\gamma$ 10°	$\gamma$ 7°	$\gamma$ 10°	$\gamma$ 4°	$\gamma$ 4°	$\gamma$ 3°	$\gamma$ 10°	$\gamma$ 10°	$\gamma$ -10°	$\gamma$ -6°
Shank													
Coating													
Cutting diameter tolerance class (TDC)	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9
Direction													
Basic standard group (BSG)													
Product Family Code	<b>S761</b>	<b>S763</b>	<b>S766</b>	<b>S767</b>	<b>S722HB</b>	<b>S768</b>	<b>S260</b>	<b>S262</b>	<b>S219</b>	<b>S612</b>	<b>S662</b>	<b>S521</b>	<b>S523</b>
PSF cutting diameters range	3.00 – 20.00	3.00 – 20.00	4.00 – 20.00	4.00 – 20.00	3.00 – 20.00	4.00 – 20.00	3.00 – 20.00	3.00 – 20.00	3.00 – 20.00	1.00 – 12.00	3.00 – 20.00	3.00 – 16.00	1.50 – 16.00
<b>P</b>	P1	■	■	■	■	■	■						
	P2	■	■	■	■	■	■						
	P3	■	■	■	■	■	■						
	P4	■	■	■	■	■	■			▣			
<b>M</b>	M1	■	■	■	■	■	■						
	M2	■	■	■	■	■	■	■	■	■			
	M3	■	■	■	■	■	■	■	■	■			
	M4							■	■	■			
<b>K</b>	K1	■	■	■	■	■	■						
	K2	■	■	■	■	■	■						
	K3	■	■	■	■	■	■						
	K4	■	■	■	■	■	■						
	K5	■	■	■	■	■	■						
<b>N</b>	N1										■		
	N2										■		
	N3										■		
	N4										■		
	N5										■		
<b>S</b>	S1	■	■	■	■	■	■	■	■				
	S2	■	■	■	■	■	■	■	■				
	S3	■	■	■	■	■	■	■	■				
	S4	■	■	■	■	■	■	■	■				
<b>H</b>	H1						■	■				■	■
	H2						■	■				■	■
	H3						■	■				■	■
	H4											■	■

■ Primary use    ▣ Possible use



ISO  
13399



PMK  
NSH

HM

HM

N

N



$\lambda$   
40°

$\lambda$   
40°

$\lambda$   
40°

$\lambda$   
40°

$\gamma$   
-6°

$\gamma$   
-6°



DC  
h9

DC  
h9



DORMER

DORMER



S524

S561

3.00 – 16.00

1.00 – 20.00

143

144

P1

P2

P3

P4

M1

M2

M3

M4

K1

K2

K3

K4

K5

N1

N2

N3

N4

N5

S1

S2

S3

S4

H1

H2

H3

H4



■ Primary use

▣ Possible use


# S761



## 4-Flute Solid Carbide End Mill

Short cut length, 4-flute design with 40° helix and differential pitch to reduce vibrations and improve surface finish in profile milling. AlCrN coating improves performance and extends the tool life. Also suited for plunging, ramping and trochoidal milling.

HM	N	NOF 4#
	λ 40°	γ 10°
DIN 6535HA	AlCrN	DC h9
	DORMER	

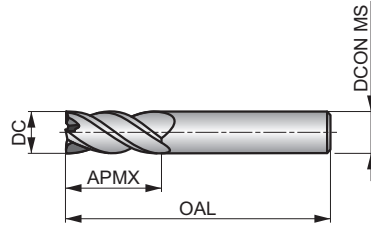

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 211 J	<b>P1.2</b> ■ 236 J	<b>P1.3</b> ■ 243 J	<b>P2.1</b> ■ 180 J	<b>P2.2</b> ■ 158 J	<b>P2.3</b> ■ 140 I	<b>P3.1</b> ■ 146 J	<b>P3.2</b> ■ 117 I	<b>P3.3</b> ■ 99 I	<b>P4.1</b> ■ 86 I	<b>P4.2</b> ■ 74 I	<b>M1.1</b> ■ 122 J	<b>M1.2</b> ■ 103 J	<b>M2.1</b> ■ 108 J
<b>M2.2</b> ■ 89 I	<b>M3.1</b> ■ 100 I	<b>M3.2</b> ■ 86 I	<b>K1.1</b> ■ 208 J	<b>K1.2</b> ■ 154 J	<b>K1.3</b> ■ 116 J	<b>K2.1</b> ■ 214 J	<b>K2.2</b> ■ 174 J	<b>K2.3</b> ■ 139 I	<b>K3.1</b> ■ 189 J	<b>K3.2</b> ■ 145 J	<b>K3.3</b> ■ 117 I	<b>K4.1</b> ■ 176 I	<b>K4.2</b> ■ 132 I
<b>K4.3</b> ■ 97 I	<b>K4.4</b> ■ 83 I	<b>K4.5</b> ■ 69 I	<b>K5.1</b> ■ 199 I	<b>K5.2</b> ■ 149 I	<b>K5.3</b> ■ 116 I	<b>S1.2</b> ■ 72 I	<b>S2.1</b> ■ 56 I	<b>S3.1</b> ■ 42 I	<b>S4.1</b> ■ 33 I				

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S7613.0	3.00	6.00	9.00	57.0	4
S7614.0	4.00	6.00	12.00	57.0	4
S7615.0	5.00	6.00	13.00	57.0	4
S7616.0	6.00	6.00	13.00	57.0	4
S7618.0	8.00	8.00	20.00	64.0	4
S76110.0	10.00	10.00	22.00	72.0	4
S76112.0	12.00	12.00	26.00	83.0	4
S76114.0	14.00	14.00	32.00	83.0	4
S76116.0	16.00	16.00	32.00	92.0	4
S76120.0	20.00	20.00	38.00	104.0	4



# S763



## 4-Flute Solid Carbide Corner Radius End Mill

Short cut length, 4-flute design with different corner radius available, 40° helix with differential pitch to reduce vibrations and improve surface finish, when milling contours where a corner radius is required. AlCrN coating improves performance. Also suited for plunging, ramping, z-level roughing and helical interpolation.

HM	N	NOF 4#
	λ 40°	γ 10°
DIN 6535HA	AlCrN	DC h9

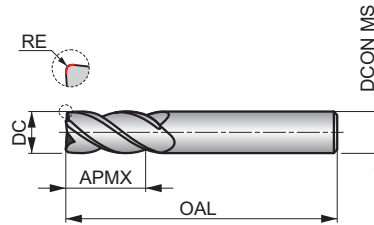


Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 211 J	<b>P1.2</b> ■ 236 J	<b>P1.3</b> ■ 243 J	<b>P2.1</b> ■ 180 J	<b>P2.2</b> ■ 158 J	<b>P2.3</b> ■ 140 I	<b>P3.1</b> ■ 146 J	<b>P3.2</b> ■ 117 I	<b>P3.3</b> ■ 99 I	<b>P4.1</b> ■ 86 I	<b>P4.2</b> ■ 74 I	<b>M1.1</b> ■ 122 J	<b>M1.2</b> ■ 103 J	<b>M2.1</b> ■ 108 J
<b>M2.2</b> ■ 89 I	<b>M3.1</b> ■ 100 I	<b>M3.2</b> ■ 86 I	<b>K1.1</b> ■ 208 J	<b>K1.2</b> ■ 154 J	<b>K1.3</b> ■ 116 J	<b>K2.1</b> ■ 214 J	<b>K2.2</b> ■ 174 J	<b>K2.3</b> ■ 139 I	<b>K3.1</b> ■ 189 J	<b>K3.2</b> ■ 145 J	<b>K3.3</b> ■ 117 I	<b>K4.1</b> ■ 176 I	<b>K4.2</b> ■ 132 I
<b>K4.3</b> ■ 97 I	<b>K4.4</b> ■ 83 I	<b>K4.5</b> ■ 69 I	<b>K5.1</b> ■ 199 I	<b>K5.2</b> ■ 149 I	<b>K5.3</b> ■ 116 I	<b>S1.2</b> ■ 72 I	<b>S2.1</b> ■ 56 I	<b>S3.1</b> ■ 42 I	<b>S4.1</b> ■ 33 I				

DCON MS tolerance h6; RE ±0.01 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S7633.0XR0.3	3.00	0.30	3.00	9.00	40.0	4
S7634.0XR0.3	4.00	0.30	4.00	12.00	50.0	4
S7634.0XR0.5	4.00	0.50	4.00	12.00	50.0	4
S7635.0XR0.3	5.00	0.30	5.00	15.00	50.0	4
S7635.0XR0.5	5.00	0.50	5.00	15.00	50.0	4
S7636.0XR0.5	6.00	0.50	6.00	16.00	50.0	4
S7636.0XR1.0	6.00	1.00	6.00	16.00	50.0	4
S7638.0XR0.5	8.00	0.50	8.00	20.00	64.0	4
S7638.0XR1.0	8.00	1.00	8.00	20.00	64.0	4
S76310.0XR0.5	10.00	0.50	10.00	22.00	70.0	4
S76310.0XR1.0	10.00	1.00	10.00	22.00	70.0	4
S76310.0XR2.0	10.00	2.00	10.00	22.00	70.0	4
S76312.0XR1.0	12.00	1.00	12.00	25.00	75.0	4
S76312.0XR2.0	12.00	2.00	12.00	25.00	75.0	4
S76312.0XR3.0	12.00	3.00	12.00	25.00	75.0	4
S76314.0XR1.5	14.00	1.50	14.00	32.00	90.0	4
S76316.0XR1.0	16.00	1.00	16.00	32.00	90.0	4
S76316.0XR2.0	16.00	2.00	16.00	32.00	90.0	4
S76316.0XR3.0	16.00	3.00	16.00	32.00	90.0	4
S76318.0XR2.0	18.00	2.00	18.00	38.00	100.0	4
S76320.0XR3.0	20.00	3.00	20.00	38.00	100.0	4

# S766



## 4-Flute Solid Carbide End Mill

Short cut length, 4-flute design with unequal helix and differential pitch to reduce vibrations and improve surface finish in profile milling. TiSiN coating increases tool life and improves performance. Also suited for plunging, ramping and trochoidal milling.

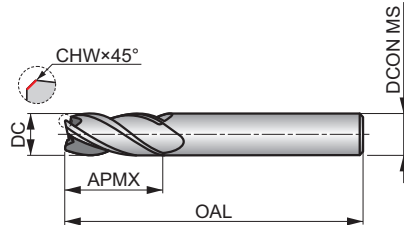

HM	N	NOF 4#
	$\lambda \neq$	$\gamma$ 10°
DIN 6535HA	TiSiN	DC h9
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 211 J	<b>P1.2</b> ■ 236 J	<b>P1.3</b> ■ 243 J	<b>P2.1</b> ■ 180 J	<b>P2.2</b> ■ 158 J	<b>P2.3</b> ■ 140 I	<b>P3.1</b> ■ 146 J	<b>P3.2</b> ■ 117 I	<b>P3.3</b> ■ 99 I	<b>P4.1</b> ■ 86 I	<b>P4.2</b> ■ 74 I	<b>M1.1</b> ■ 122 J	<b>M1.2</b> ■ 103 J	<b>M2.1</b> ■ 108 J
<b>M2.2</b> ■ 89 I	<b>M3.1</b> ■ 100 I	<b>M3.2</b> ■ 86 I	<b>K1.1</b> ■ 208 J	<b>K1.2</b> ■ 154 J	<b>K1.3</b> ■ 116 J	<b>K2.1</b> ■ 214 J	<b>K2.2</b> ■ 174 J	<b>K2.3</b> ■ 139 I	<b>K3.1</b> ■ 189 J	<b>K3.2</b> ■ 145 J	<b>K3.3</b> ■ 117 I	<b>K4.1</b> ■ 176 I	<b>K4.2</b> ■ 132 I
<b>K4.3</b> ■ 97 I	<b>K4.4</b> ■ 83 I	<b>K4.5</b> ■ 69 I	<b>K5.1</b> ■ 199 I	<b>K5.2</b> ■ 149 I	<b>K5.3</b> ■ 116 I	<b>S1.2</b> ■ 72 I	<b>S2.1</b> ■ 56 I	<b>S3.1</b> ■ 42 I	<b>S4.1</b> ■ 33 I				

DCON MS tolerance h6; CHW ±0.02X45° mm.


Product	DC (mm)	CHW (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S7664.0	4.00	0.10	6.00	11.00	57.0	4
S7665.0	5.00	0.10	6.00	13.00	57.0	4
S7666.0	6.00	0.10	6.00	13.00	57.0	4
S7668.0	8.00	0.20	8.00	20.00	64.0	4
S76610.0	10.00	0.20	10.00	22.00	72.0	4
S76612.0	12.00	0.20	12.00	26.00	83.0	4
S76614.0	14.00	0.30	14.00	26.00	83.0	4
S76616.0	16.00	0.30	16.00	32.00	92.0	4
S76620.0	20.00	0.40	20.00	38.00	104.0	4

# S767



## 4-Flute Solid Carbide Corner Radius End Mill

Short cut length, 4-flute design with different corner radius available, unequal helix and differential pitch to reduce vibrations and improve surface finish when milling contours where a corner radius is required. TiSiN coating improves performance. Also suited for plunging, ramping and trochoidal milling.

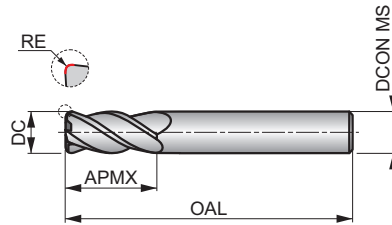

HM	N	NOF 4#
	$\lambda \neq$	$\gamma 10^\circ$
DIN 6535HA	TiSiN	DC h9
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 211 J	<b>P1.2</b> ■ 236 J	<b>P1.3</b> ■ 243 J	<b>P2.1</b> ■ 180 J	<b>P2.2</b> ■ 158 J	<b>P2.3</b> ■ 140 I	<b>P3.1</b> ■ 146 J	<b>P3.2</b> ■ 117 I	<b>P3.3</b> ■ 99 I	<b>P4.1</b> ■ 86 I	<b>P4.2</b> ■ 74 I	<b>M1.1</b> ■ 122 J	<b>M1.2</b> ■ 103 J	<b>M2.1</b> ■ 108 J
<b>M2.2</b> ■ 89 I	<b>M3.1</b> ■ 100 I	<b>M3.2</b> ■ 86 I	<b>K1.1</b> ■ 208 J	<b>K1.2</b> ■ 154 J	<b>K1.3</b> ■ 116 J	<b>K2.1</b> ■ 214 J	<b>K2.2</b> ■ 174 J	<b>K2.3</b> ■ 139 I	<b>K3.1</b> ■ 189 J	<b>K3.2</b> ■ 145 J	<b>K3.3</b> ■ 117 I	<b>K4.1</b> ■ 176 I	<b>K4.2</b> ■ 132 I
<b>K4.3</b> ■ 97 I	<b>K4.4</b> ■ 83 I	<b>K4.5</b> ■ 69 I	<b>K5.1</b> ■ 199 I	<b>K5.2</b> ■ 149 I	<b>K5.3</b> ■ 116 I	<b>S1.2</b> ■ 72 I	<b>S2.1</b> ■ 56 I	<b>S3.1</b> ■ 42 I	<b>S4.1</b> ■ 33 I				

DCON MS tolerance h6; RE ±0.01 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S7674.0XR0.3	4.00	0.30	6.00	11.00	57.0	4
S7674.0XR0.5	4.00	0.50	6.00	11.00	57.0	4
S7675.0XR0.3	5.00	0.30	6.00	13.00	57.0	4
S7675.0XR0.5	5.00	0.50	6.00	13.00	57.0	4
S7676.0XR0.3	6.00	0.30	6.00	13.00	57.0	4
S7676.0XR0.5	6.00	0.50	6.00	13.00	57.0	4
S7676.0XR1.0	6.00	1.00	6.00	13.00	57.0	4
S7678.0XR0.3	8.00	0.30	8.00	20.00	64.0	4
S7678.0XR0.5	8.00	0.50	8.00	20.00	64.0	4
S7678.0XR1.0	8.00	1.00	8.00	20.00	64.0	4
S76710.0XR0.3	10.00	0.30	10.00	22.00	72.0	4
S76710.0XR0.5	10.00	0.50	10.00	22.00	72.0	4
S76710.0XR1.0	10.00	1.00	10.00	22.00	72.0	4
S76712.0XR0.3	12.00	0.30	12.00	26.00	83.0	4
S76712.0XR0.5	12.00	0.50	12.00	26.00	83.0	4
S76712.0XR1.0	12.00	1.00	12.00	26.00	83.0	4
S76712.0XR2.0	12.00	2.00	12.00	26.00	83.0	4
S76716.0XR0.3	16.00	0.30	16.00	32.00	92.0	4
S76716.0XR0.5	16.00	0.50	16.00	32.00	92.0	4
S76716.0XR1.0	16.00	1.00	16.00	32.00	92.0	4
S76716.0XR2.0	16.00	2.00	16.00	32.00	92.0	4
S76720.0XR0.3	20.00	0.30	20.00	38.00	104.0	4
S76720.0XR0.5	20.00	0.50	20.00	38.00	104.0	4
S76720.0XR1.0	20.00	1.00	20.00	38.00	104.0	4
S76720.0XR2.0	20.00	2.00	20.00	38.00	104.0	4

# S722HB



## 4-Flute Solid Carbide End Mill

Medium cut length, 4-flute design with 40° helix, differential pitch and Weldon shank provides high rigidity for profile milling deep walls. Neck recess to avoid work contact with the wall and extend reach. AlCrN coating improves performance and extends the tool life.

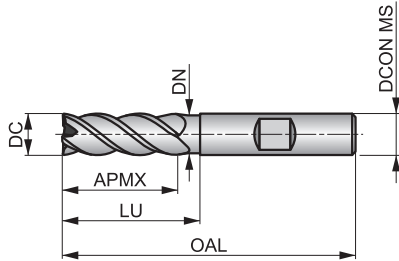

HM	N	NOF 4#
	40°	7°
DIN 6535HB	AlCrN	DC h9
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 199 J	<b>P1.2</b> ■ 223 J	<b>P1.3</b> ■ 230 J	<b>P2.1</b> ■ 170 J	<b>P2.2</b> ■ 150 J	<b>P2.3</b> ■ 133 I	<b>P3.1</b> ■ 138 J	<b>P3.2</b> ■ 111 I	<b>P3.3</b> ■ 94 I	<b>P4.1</b> ■ 82 I	<b>P4.2</b> ■ 70 I	<b>M1.1</b> ■ 115 J	<b>M1.2</b> ■ 97 J	<b>M2.1</b> ■ 102 J
<b>M2.2</b> ■ 84 I	<b>M3.1</b> ■ 94 I	<b>M3.2</b> ■ 81 I	<b>K1.1</b> ■ 196 J	<b>K1.2</b> ■ 145 J	<b>K1.3</b> ■ 109 J	<b>K2.1</b> ■ 202 J	<b>K2.2</b> ■ 164 J	<b>K2.3</b> ■ 131 I	<b>K3.1</b> ■ 178 J	<b>K3.2</b> ■ 136 J	<b>K3.3</b> ■ 110 I	<b>K4.1</b> ■ 165 I	<b>K4.2</b> ■ 125 I
<b>K4.3</b> ■ 91 I	<b>K4.4</b> ■ 78 I	<b>K4.5</b> ■ 65 I	<b>K5.1</b> ■ 187 I	<b>K5.2</b> ■ 141 I	<b>K5.3</b> ■ 109 I	<b>S1.2</b> ■ 69 I	<b>S2.1</b> ■ 53 I	<b>S3.1</b> ■ 40 I	<b>S4.1</b> ■ 31 I				

DCON MS tolerance h6; RE ±0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S722HB3.0	3.00	0.10	6.00	9.00	50.0	4	15.00	2.80
S722HB4.0	4.00	0.10	6.00	11.00	57.0	4	20.00	3.70
S722HB5.0	5.00	0.10	6.00	13.00	57.0	4	20.00	4.60
S722HB6.0	6.00	0.10	6.00	20.00	60.0	4	25.00	5.50
S722HB8.0	8.00	0.20	8.00	20.00	64.0	4	26.00	7.40
S722HB10.0	10.00	0.20	10.00	27.00	70.0	4	32.00	9.20
S722HB12.0	12.00	0.20	12.00	26.00	83.0	4	37.00	11.00
S722HB14.0	14.00	0.20	14.00	26.00	83.0	4	37.00	13.00
S722HB16.0	16.00	0.20	16.00	32.00	92.0	4	42.00	15.00
S722HB18.0	18.00	0.20	18.00	32.00	92.0	4	42.00	17.00
S722HB20.0	20.00	0.20	20.00	38.00	104.0	4	50.00	19.00

# S768



## 4-Flute Solid Carbide End Mill, Long Series

Long cut length, 4-flute design with unequal helix and differential pitch to reduce vibrations and improve surface finish when milling deep walls in profile milling. Neck recess to avoid work contact with the wall and extend reach. TiSiN coating increases tool life and improves performance.

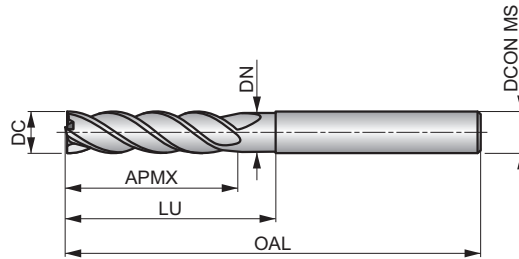

HM	N	NOF 4#
	$\lambda \neq$	$\gamma$ 10°
DIN 6535HA	TiSiN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 148 l	<b>P1.2</b> ■ 165 l	<b>P1.3</b> ■ 170 l	<b>P2.1</b> ■ 126 l	<b>P2.2</b> ■ 111 l	<b>P2.3</b> ■ 98 G	<b>P3.1</b> ■ 102 l	<b>P3.2</b> ■ 82 G	<b>P3.3</b> ■ 69 G	<b>P4.1</b> ■ 60 G	<b>P4.2</b> ■ 52 G	<b>M1.1</b> ■ 85 l	<b>M1.2</b> ■ 72 l	<b>M2.1</b> ■ 76 l
<b>M2.2</b> ■ 62 l	<b>M3.1</b> ■ 70 l	<b>M3.2</b> ■ 60 l	<b>K1.1</b> ■ 146 l	<b>K1.2</b> ■ 108 l	<b>K1.3</b> ■ 81 l	<b>K2.1</b> ■ 150 l	<b>K2.2</b> ■ 122 l	<b>K2.3</b> ■ 97 G	<b>K3.1</b> ■ 132 l	<b>K3.2</b> ■ 102 l	<b>K3.3</b> ■ 82 G	<b>K4.1</b> ■ 123 G	<b>K4.2</b> ■ 92 G
<b>K4.3</b> ■ 68 G	<b>K4.4</b> ■ 58 l	<b>K4.5</b> ■ 48 l	<b>K5.1</b> ■ 139 G	<b>K5.2</b> ■ 104 G	<b>K5.3</b> ■ 81 G	<b>S1.2</b> ■ 50 l	<b>S2.1</b> ■ 39 G	<b>S3.1</b> ■ 29 G	<b>S4.1</b> ■ 23 G				

DCON MS tolerance h6; RE ±0.01 mm.

Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
<b>S7684.0</b>	4.00	0.10	6.00	19.00	75.0	4	32.00	3.70
<b>S7685.0</b>	5.00	0.10	6.00	19.00	75.0	4	32.00	4.60
<b>S7686.0</b>	6.00	0.10	6.00	25.00	75.0	4	32.00	5.50
<b>S7688.0</b>	8.00	0.20	8.00	30.00	75.0	4	38.00	7.40
<b>S76810.0</b>	10.00	0.20	10.00	40.00	100.0	4	50.00	9.20
<b>S76812.0</b>	12.00	0.30	12.00	45.00	100.0	4	55.00	11.00
<b>S76816.0</b>	16.00	0.30	16.00	65.00	125.0	4	75.00	15.00
<b>S76820.0</b>	20.00	0.30	20.00	65.00	125.0	4	75.00	19.00


# S260



## 4-Flute Solid Carbide End Mill

Short cut length, 4-flute design provides high rigidity for standard profile milling. AlCrN coating improves performance and extends the tool life when milling difficult to machine materials. The 40° helix with differential pitch reduces vibrations and maximizes productivity and tool life.

HM	N	NOF 4#
	40°	γ 4°
DIN 6358A	AlCrN	DC h9
	DORMER	

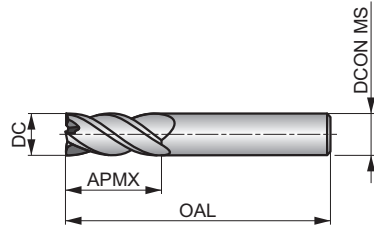

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P4.3</b> ■ 97 J	<b>M2.3</b> ■ 97 J	<b>M3.3</b> ■ 99 I	<b>M4.1</b> ■ 97 I	<b>M4.2</b> ■ 83 I	<b>S1.3</b> ■ 70 I	<b>S2.2</b> ■ 56 I	<b>S3.2</b> ■ 40 I	<b>S4.2</b> ■ 32 I	<b>H1.1</b> ■ 179 I	<b>H2.1</b> ■ 106 G	<b>H3.1</b> ■ 118 G	<b>H3.2</b> ■ 97 G
-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	------------------------	------------------------	------------------------	-----------------------

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S2603.0	3.00	6.00	9.00	57.0	4
S2604.0	4.00	6.00	12.00	57.0	4
S2605.0	5.00	6.00	13.00	57.0	4
S2606.0	6.00	6.00	13.00	57.0	4
S2608.0	8.00	8.00	20.00	64.0	4
S26010.0	10.00	10.00	22.00	72.0	4
S26012.0	12.00	12.00	26.00	83.0	4
S26014.0	14.00	14.00	32.00	83.0	4
S26016.0	16.00	16.00	32.00	92.0	4
S26018.0	18.00	18.00	38.00	92.0	4
S26020.0	20.00	20.00	38.00	104.0	4

# S262




## 4-Flute Solid Carbide Corner Radius End Mill

Short cut length, 4-flute design with different corner radius available provides high rigidity for standard profile milling when corner radius is required. AlCrN coating improves performance when milling difficult to machine materials. The 40° helix with differential pitch reduces vibrations and maximizes productivity.

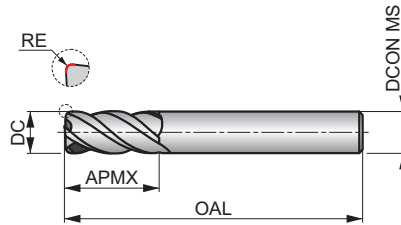

HM	N	NOF 4#
	λ 40°	γ 4°
DIN 6535HA	AlCrN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P4.3</b> ■ 97 J	<b>M2.3</b> ■ 97 J	<b>M3.3</b> ■ 99 I	<b>M4.1</b> ■ 97 I	<b>M4.2</b> ■ 83 I	<b>S1.3</b> ■ 70 I	<b>S2.2</b> ■ 56 I	<b>S3.2</b> ■ 40 I	<b>S4.2</b> ■ 32 I	<b>H1.1</b> ■ 179 I	<b>H2.1</b> ■ 106 G	<b>H3.1</b> ■ 118 G	<b>H3.2</b> ■ 97 G
-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	------------------------	------------------------	------------------------	-----------------------

DCON MS tolerance h6; RE ±0.01 mm.

Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S2623.0XR0.3	3.00	0.30	6.00	9.00	50.0	4
S2623.0XR0.5	3.00	0.50	6.00	9.00	50.0	4
S2624.0XR0.3	4.00	0.30	6.00	12.00	57.0	4
S2624.0XR0.5	4.00	0.50	6.00	12.00	57.0	4
S2624.0XR1.0	4.00	1.00	6.00	12.00	57.0	4
S2625.0XR0.3	5.00	0.30	6.00	15.00	57.0	4
S2625.0XR0.5	5.00	0.50	6.00	15.00	57.0	4
S2626.0XR0.3	6.00	0.30	6.00	16.00	57.0	4
S2626.0XR0.5	6.00	0.50	6.00	16.00	57.0	4
S2626.0XR1.0	6.00	1.00	6.00	16.00	57.0	4
S2628.0XR0.3	8.00	0.30	8.00	20.00	64.0	4
S2628.0XR0.5	8.00	0.50	8.00	20.00	64.0	4
S2628.0XR1.0	8.00	1.00	8.00	20.00	64.0	4
S2628.0XR1.5	8.00	1.50	8.00	20.00	64.0	4
S2628.0XR2.0	8.00	2.00	8.00	20.00	64.0	4
S26210.0XR0.3	10.00	0.30	10.00	22.00	72.0	4
S26210.0XR0.5	10.00	0.50	10.00	22.00	72.0	4
S26210.0XR1.0	10.00	1.00	10.00	22.00	72.0	4
S26210.0XR1.5	10.00	1.50	10.00	22.00	72.0	4
S26210.0XR2.0	10.00	2.00	10.00	22.00	72.0	4
S26212.0XR0.3	12.00	0.30	12.00	26.00	83.0	4
S26212.0XR0.5	12.00	0.50	12.00	26.00	83.0	4
S26212.0XR1.0	12.00	1.00	12.00	26.00	83.0	4
S26212.0XR2.0	12.00	2.00	12.00	26.00	83.0	4
S26212.0XR2.5	12.00	2.50	12.00	26.00	83.0	4
S26212.0XR3.0	12.00	3.00	12.00	26.00	83.0	4
S26214.0XR0.3	14.00	0.30	14.00	32.00	83.0	4
S26214.0XR0.5	14.00	0.50	14.00	32.00	83.0	4
S26214.0XR1.0	14.00	1.00	14.00	32.00	83.0	4
S26214.0XR2.0	14.00	2.00	14.00	32.00	83.0	4
S26214.0XR3.0	14.00	3.00	14.00	32.00	83.0	4


Product	DC	RE	DCON MS	APMX	OAL	NOF
	(mm)	(mm)	(mm)	(mm)	(mm)	
<b>S26216.0XR0.3</b>	16.00	0.30	16.00	32.00	92.0	4
<b>S26216.0XR0.5</b>	16.00	0.50	16.00	32.00	92.0	4
<b>S26216.0XR1.0</b>	16.00	1.00	16.00	32.00	92.0	4
<b>S26216.0XR2.0</b>	16.00	2.00	16.00	32.00	92.0	4
<b>S26216.0XR2.5</b>	16.00	2.50	16.00	32.00	92.0	4
<b>S26216.0XR3.0</b>	16.00	3.00	16.00	32.00	92.0	4
<b>S26216.0XR4.0</b>	16.00	4.00	16.00	32.00	92.0	4
<b>S26218.0XR0.3</b>	18.00	0.30	18.00	38.00	92.0	4
<b>S26218.0XR0.5</b>	18.00	0.50	18.00	38.00	92.0	4
<b>S26218.0XR1.0</b>	18.00	1.00	18.00	38.00	92.0	4
<b>S26218.0XR2.0</b>	18.00	2.00	18.00	38.00	92.0	4
<b>S26218.0XR3.0</b>	18.00	3.00	18.00	38.00	92.0	4
<b>S26220.0XR0.3</b>	20.00	0.30	20.00	38.00	104.0	4
<b>S26220.0XR0.5</b>	20.00	0.50	20.00	38.00	104.0	4
<b>S26220.0XR1.0</b>	20.00	1.00	20.00	38.00	104.0	4
<b>S26220.0XR2.0</b>	20.00	2.00	20.00	38.00	104.0	4
<b>S26220.0XR2.5</b>	20.00	2.50	20.00	38.00	104.0	4
<b>S26220.0XR3.0</b>	20.00	3.00	20.00	38.00	104.0	4
<b>S26220.0XR4.0</b>	20.00	4.00	20.00	38.00	104.0	4

# S219



## 4-Flute Solid Carbide End Mill, Long Reach

Extra short cut length, 4-flute design provides high rigidity for milling and profiling in hard to reach areas. Neck recess to avoid work contact with the wall. AlTiN coating increases tool life and improves performance when milling difficult to machine materials. The 40° helix is designed for high performance machining.

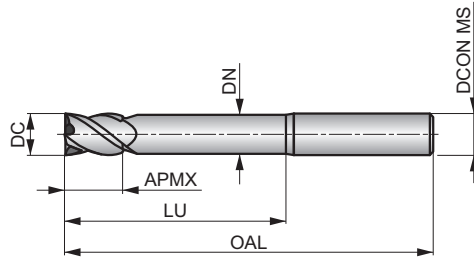

HM	N	NOF 4
	40°	3°
DIN 6358A	AlTiN	DC h9
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P4.3</b>	<b>M2.3</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>S1.3</b>	<b>S2.2</b>	<b>S3.2</b>	<b>S4.2</b>
■ 64 J	■ 64 J	■ 65 I	■ 64 I	■ 54 I	■ 46 I	■ 38 I	■ 26 I	■ 22 I

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S2193.0	3.00	3.00	5.00	60.0	4	30.00	2.80
S2194.0	4.00	4.00	8.00	60.0	4	32.00	3.70
S2195.0	5.00	5.00	9.00	60.0	4	32.00	4.60
S2196.0	6.00	6.00	10.00	75.0	4	40.00	5.50
S2198.0	8.00	8.00	12.00	75.0	4	40.00	7.40
S21910.0	10.00	10.00	14.00	75.0	4	40.00	9.20
S21912.0	12.00	12.00	16.00	100.0	4	60.00	11.00
S21914.0	14.00	14.00	22.00	125.0	4	85.00	13.00
S21916.0	16.00	16.00	22.00	125.0	4	85.00	15.00
S21918.0	18.00	18.00	26.00	125.0	4	85.00	17.00
S21920.0	20.00	20.00	26.00	125.0	4	85.00	19.00


# S612



## 4-Flute Solid Carbide End Mill

Short cut length, 4-flute design provides high rigidity for standard profile milling. Diamond like coating increases service life and improves performance. For milling abrasive materials.

HM	N	NOF 4
	$\lambda$ 40°	$\gamma$ 10°
DIN 6535HA	Diamond	DC h9
	DORMER	

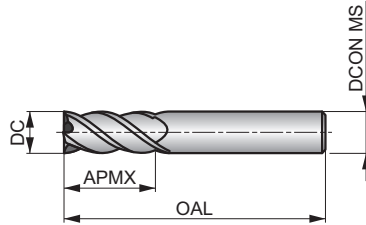

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

### N5.1

■ 350 G

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S6121.0	1.00	3.00	3.00	50.0	4
S6121.5	1.50	3.00	4.50	50.0	4
S6122.0	2.00	3.00	6.50	50.0	4
S6122.5	2.50	3.00	6.50	50.0	4
S6123.0	3.00	3.00	9.00	50.0	4
S6124.0	4.00	4.00	12.00	50.0	4
S6125.0	5.00	5.00	15.00	50.0	4
S6126.0	6.00	6.00	20.00	60.0	4
S6128.0	8.00	8.00	20.00	64.0	4
S61210.0	10.00	10.00	22.00	70.0	4
S61212.0	12.00	12.00	25.00	75.0	4

# S662




## 4-Flute Solid Carbide Corner Radius End Mill

Short cut length, 4-flute design with differential pitch and different corner radius available, for profile milling where a corner radius is required. The S662, with high hook geometry, is designed for high performance machining in non-ferrous materials.

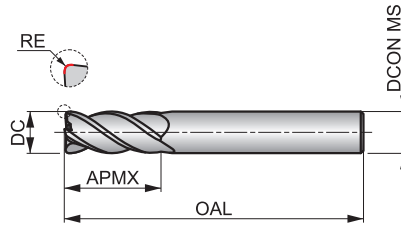

HM	W	NOF 4#
	$\lambda$ 40°	$\gamma$ 10°
DIN 6535HA	Bright	DC h9
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>N1.1</b> ■ 709 0	<b>N1.2</b> ■ 533 0	<b>N1.3</b> ■ 357 0	<b>N2.1</b> ■ 357 N	<b>N2.2</b> ■ 320 N	<b>N2.3</b> ■ 229 N	<b>N3.1</b> ■ 373 N	<b>N3.2</b> ■ 219 N	<b>N3.3</b> ■ 112 N	<b>N4.1</b> ■ 373 P	<b>N4.2</b> ■ 144 P
------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------

DCON MS tolerance h6; RE ±0.01 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S6623.0XR0.3	3.00	0.30	6.00	9.00	57.0	4
S6624.0XR0.3	4.00	0.30	6.00	12.00	57.0	4
S6624.0XR0.5	4.00	0.50	6.00	12.00	57.0	4
S6625.0XR0.3	5.00	0.30	6.00	15.00	57.0	4
S6625.0XR0.5	5.00	0.50	6.00	15.00	57.0	4
S6626.0XR0.5	6.00	0.50	6.00	16.00	57.0	4
S6626.0XR1.0	6.00	1.00	6.00	16.00	57.0	4
S6626.0XR2.0	6.00	2.00	6.00	16.00	57.0	4
S6628.0XR0.5	8.00	0.50	8.00	20.00	64.0	4
S6628.0XR1.0	8.00	1.00	8.00	20.00	64.0	4
S6628.0XR2.0	8.00	2.00	8.00	20.00	64.0	4
S66210.0XR0.5	10.00	0.50	10.00	22.00	72.0	4
S66210.0XR1.0	10.00	1.00	10.00	22.00	72.0	4
S66210.0XR2.0	10.00	2.00	10.00	22.00	72.0	4
S66212.0XR1.0	12.00	1.00	12.00	26.00	83.0	4
S66212.0XR2.0	12.00	2.00	12.00	26.00	83.0	4
S66212.0XR2.5	12.00	2.50	12.00	26.00	83.0	4
S66212.0XR3.0	12.00	3.00	12.00	26.00	83.0	4
S66216.0XR1.0	16.00	1.00	16.00	32.00	92.0	4
S66216.0XR2.0	16.00	2.00	16.00	32.00	92.0	4
S66216.0XR3.0	16.00	3.00	16.00	32.00	92.0	4
S66216.0XR4.0	16.00	4.00	16.00	32.00	92.0	4
S66220.0XR2.0	20.00	2.00	20.00	38.00	104.0	4
S66220.0XR4.0	20.00	4.00	20.00	38.00	104.0	4

# S521




## 4-Flute Solid Carbide Corner Radius End Mill

Extra short cut length, 4-flute design with different corner radius available and neck recess provides high rigidity for milling contours when corner radius is required. TiSiN coating improves performance and 45° helix is designed for high performance machining in hardened materials up to 63HRC.

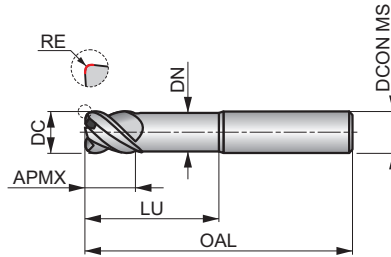

HM	N	NOF 4
	45°	γ -10°
DIN 6535HA	TiSiN	DC h9




Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b> ■ 119 I	<b>H2.1</b> ■ 70 G	<b>H2.2</b> ■ 60 E	<b>H3.1</b> ■ 78 G	<b>H3.2</b> ■ 64 G	<b>H4.1</b> ■ 50 E	<b>H4.2</b> ■ 42 B
------------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

DCON MS tolerance h6; RE ±0.01 mm.

Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S5213.0XR0.3	3.00	0.30	6.00	4.00	60.0	4	14.00	2.80
S5214.0XR0.3	4.00	0.30	6.00	5.00	60.0	4	16.00	3.70
S5214.0XR0.5	4.00	0.50	6.00	5.00	60.0	4	16.00	3.70
S5215.0XR0.3	5.00	0.30	6.00	6.00	60.0	4	18.00	4.60
S5215.0XR0.5	5.00	0.50	6.00	6.00	60.0	4	18.00	4.60
S5216.0XR0.5	6.00	0.50	6.00	7.00	60.0	4	20.00	5.50
S5216.0XR1.0	6.00	1.00	6.00	7.00	60.0	4	20.00	5.50
S5218.0XR0.5	8.00	0.50	8.00	9.00	64.0	4	26.00	7.40
S5218.0XR1.0	8.00	1.00	8.00	9.00	64.0	4	26.00	7.40
S52110.0XR1.0	10.00	1.00	10.00	11.00	70.0	4	31.00	9.20
S52110.0XR2.0	10.00	2.00	10.00	11.00	70.0	4	31.00	9.20
S52112.0XR1.0	12.00	1.00	12.00	13.00	75.0	4	37.00	11.00
S52112.0XR2.0	12.00	2.00	12.00	13.00	75.0	4	37.00	11.00
S52116.0XR1.0	16.00	1.00	16.00	17.00	90.0	4	43.00	15.00
S52116.0XR2.0	16.00	2.00	16.00	17.00	90.0	4	43.00	15.00
S52116.0XR3.0	16.00	3.00	16.00	17.00	90.0	4	43.00	15.00


# S523



## 4-Flute Solid Carbide Corner Radius End Mill

Short cut length, 4-flute design with different corner radius available provides high rigidity for standard profile milling where a corner radius is required. TiSiN coating improves performance and 40° helix is designed for high performance machining in hardened materials up to 63HRC.

HM	N	NOF 4
	λ 40°	γ -6°
DIN 6535HA	TiSiN	DC h9
	DORMER	

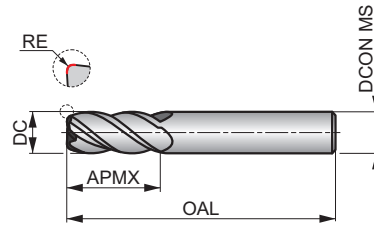

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b>	<b>H2.1</b>	<b>H2.2</b>	<b>H3.1</b>	<b>H3.2</b>	<b>H4.1</b>	<b>H4.2</b>
■ 119 I	■ 70 G	■ 60 E	■ 78 G	■ 64 G	■ 50 E	■ 42 B

DCON MS tolerance h6; RE ±0.01 mm.

Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S5231.5XR0.2	1.50	0.20	6.00	4.50	50.0	4
S5232.0XR0.2	2.00	0.20	6.00	6.50	50.0	4
S5233.0XR0.2XD3	3.00	0.20	3.00	9.00	50.0	4
S5233.0XR0.3XD3	3.00	0.30	3.00	9.00	50.0	4
S5233.0XR0.2XD6	3.00	0.20	6.00	9.00	50.0	4
S5233.0XR0.3XD6	3.00	0.30	6.00	9.00	50.0	4
S5233.0XR0.5XD6	3.00	0.50	6.00	9.00	50.0	4
S5234.0XR0.3XD4	4.00	0.30	4.00	12.00	50.0	4
S5234.0XR0.5XD4	4.00	0.50	4.00	12.00	50.0	4
S5234.0XR0.3XD6	4.00	0.30	6.00	12.00	50.0	4
S5234.0XR0.5XD6	4.00	0.50	6.00	12.00	50.0	4
S5235.0XR0.3XD5	5.00	0.30	5.00	15.00	50.0	4
S5235.0XR0.5XD5	5.00	0.50	5.00	15.00	50.0	4
S5235.0XR0.3XD6	5.00	0.30	6.00	15.00	50.0	4
S5235.0XR0.5XD6	5.00	0.50	6.00	15.00	50.0	4
S5236.0XR0.3	6.00	0.30	6.00	16.00	50.0	4
S5236.0XR0.5	6.00	0.50	6.00	16.00	50.0	4
S5236.0XR1.0	6.00	1.00	6.00	16.00	50.0	4
S5238.0XR0.3	8.00	0.30	8.00	20.00	64.0	4
S5238.0XR0.5	8.00	0.50	8.00	20.00	64.0	4
S5238.0XR1.0	8.00	1.00	8.00	20.00	64.0	4
S5238.0XR2.0	8.00	2.00	8.00	20.00	64.0	4
S52310.0XR0.5	10.00	0.50	10.00	22.00	70.0	4
S52310.0XR1.0	10.00	1.00	10.00	22.00	70.0	4
S52310.0XR1.5	10.00	1.50	10.00	22.00	70.0	4
S52310.0XR2.0	10.00	2.00	10.00	22.00	70.0	4
S52312.0XR0.5	12.00	0.50	12.00	25.00	75.0	4
S52312.0XR1.0	12.00	1.00	12.00	25.00	75.0	4
S52312.0XR2.0	12.00	2.00	12.00	25.00	75.0	4
S52312.0XR3.0	12.00	3.00	12.00	25.00	75.0	4
S52316.0XR0.5	16.00	0.50	16.00	32.00	90.0	4




Product	DC	RE	DCON MS	APMX	OAL	NOF
	(mm)	(mm)	(mm)	(mm)	(mm)	
<b>S52316.0XR1.0</b>	16.00	1.00	16.00	32.00	90.0	4
<b>S52316.0XR2.0</b>	16.00	2.00	16.00	32.00	90.0	4
<b>S52316.0XR3.0</b>	16.00	3.00	16.00	32.00	90.0	4

# S524




## 4-Flute Solid Carbide Corner Radius End Mill, Long Reach

Extra short cut length, 4-flute design with different corner radius available and 40° helix provides high rigidity for profile milling in hard to reach areas where a corner radius is required. Neck recess to avoid work contact with the wall. TiSiN coating improves performance machining in hardened materials up to 63HRC.

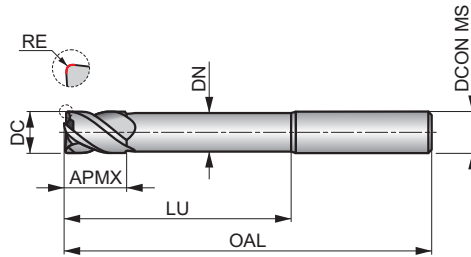

HM	N	NOF 4
	40°	γ -6°
DIN 6535HA	TiSiN	DC h9




Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b> ■ 119 I	<b>H2.1</b> ■ 70 G	<b>H2.2</b> ■ 60 E	<b>H3.1</b> ■ 78 G	<b>H3.2</b> ■ 64 G	<b>H4.1</b> ■ 50 E	<b>H4.2</b> ■ 42 B
------------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

DCON MS tolerance h6; RE ±0.01 mm.

Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S5243.0XR0.3	3.00	0.30	6.00	5.00	75.0	4	30.00	2.80
S5244.0XR0.3	4.00	0.30	6.00	8.00	75.0	4	32.00	3.70
S5244.0XR0.5	4.00	0.50	6.00	8.00	75.0	4	32.00	3.70
S5245.0XR0.3	5.00	0.30	6.00	9.00	75.0	4	32.00	4.60
S5245.0XR0.5	5.00	0.50	6.00	9.00	75.0	4	32.00	4.60
S5246.0XR0.3	6.00	0.30	6.00	10.00	75.0	4	40.00	5.50
S5246.0XR0.5	6.00	0.50	6.00	10.00	75.0	4	40.00	5.50
S5246.0XR1.0	6.00	1.00	6.00	10.00	75.0	4	40.00	5.50
S5248.0XR0.3	8.00	0.30	8.00	12.00	75.0	4	40.00	7.40
S5248.0XR0.5	8.00	0.50	8.00	12.00	75.0	4	40.00	7.40
S5248.0XR1.0	8.00	1.00	8.00	12.00	75.0	4	40.00	7.40
S52410.0XR0.5	10.00	0.50	10.00	14.00	75.0	4	40.00	9.20
S52410.0XR1.0	10.00	1.00	10.00	14.00	75.0	4	40.00	9.20
S52410.0XR2.0	10.00	2.00	10.00	14.00	75.0	4	40.00	9.20
S52412.0XR0.5	12.00	0.50	12.00	16.00	100.0	4	60.00	11.00
S52412.0XR1.0	12.00	1.00	12.00	16.00	100.0	4	60.00	11.00
S52412.0XR2.0	12.00	2.00	12.00	16.00	100.0	4	60.00	11.00
S52416.0XR0.5	16.00	0.50	16.00	22.00	125.0	4	85.00	15.00
S52416.0XR1.0	16.00	1.00	16.00	22.00	125.0	4	85.00	15.00
S52416.0XR2.0	16.00	2.00	16.00	22.00	125.0	4	85.00	15.00
S52416.0XR3.0	16.00	3.00	16.00	22.00	125.0	4	85.00	15.00


# S561



## 4-Flute Solid Carbide End Mill

Medium cut length, 4-flute design with 40° helix and gash-land to enable milling hard materials up to 70HRC. TiSiN coating improves performance and the differential pitch reduces vibrations, maximizing productivity and tool life. Square end design to produce sharp corners.

HM	N	NOF 4#
	λ 40°	γ -6°
DIN 6535HA	TiSiN	DC h9
	DORMER	

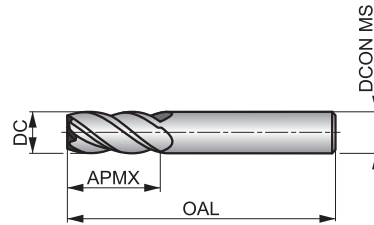

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b> ■ 119 I	<b>H2.1</b> ■ 70 G	<b>H2.2</b> ■ 60 E	<b>H3.1</b> ■ 78 G	<b>H3.2</b> ■ 64 G	<b>H4.1</b> ■ 50 E	<b>H4.2</b> ■ 42 B
------------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S5611.0	1.00	6.00	3.00	50.0	4
S5611.5	1.50	6.00	4.50	50.0	4
S5612.0	2.00	6.00	6.50	50.0	4
S5612.5	2.50	6.00	6.50	50.0	4
S5613.0	3.00	6.00	9.00	50.0	4
S5614.0	4.00	6.00	12.00	50.0	4
S5615.0	5.00	6.00	15.00	50.0	4
S5616.0	6.00	6.00	20.00	60.0	4
S5618.0	8.00	8.00	20.00	64.0	4
S56110.0	10.00	10.00	22.00	70.0	4
S56112.0	12.00	12.00	25.00	75.0	4
S56114.0	14.00	14.00	32.00	90.0	4
S56116.0	16.00	16.00	32.00	90.0	4
S56118.0	18.00	18.00	38.00	100.0	4
S56120.0	20.00	20.00	38.00	100.0	4

Material code (BMC)	HM	HM	HM	HM	HM	HM							
Mill Profile	N	N	N	N	N	N							
Number of flutes (NOF)													
Cut length													
Flute Helix (FHA)	$\lambda$ 50°	$\lambda$ 50°	$\lambda$ 50°	$\lambda$ 50°	$\lambda$ 50°	$\lambda$ 50°							
Flute Helix (FHA)	$\lambda$ 50°	$\lambda$ 50°	$\lambda$ 50°	$\lambda$ 50°	$\lambda$ 50°	$\lambda$ 50°							
Radial rake angle (GAMF)	$\gamma$ 3°	$\gamma$ 3°	$\gamma$ 3°	$\gamma$ -26°	$\gamma$ -26°	$\gamma$ -26°							
Shank													
Coating													
Cutting diameter tolerance class (TCDC)	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9							
Direction													
Basic standard group (BSG)													



Product Family Code	S225	S226	S227	S525	S526	S527							
PSF cutting diameters range	3.00 – 20.00	3.00 – 20.00	6.00 – 20.00	3.00 – 20.00	3.00 – 20.00	3.00 – 20.00							
	146	147	148	149	150	151							


P	P1												
	P2												
	P3												
	P4	■	■	■									
M	M1												
	M2	■	■	■									
	M3	■	■	■									
	M4	■	■	■									
K	K1												
	K2												
	K3												
	K4												
	K5												
N	N1												
	N2												
	N3												
	N4												
	N5												
S	S1	■	■	■									
	S2	■	■	■									
	S3	■	■	■									
	S4	■	■	■									
H	H1				■	■	■						
	H2				■	■	■						
	H3				■	■	■						
	H4				■	■	■						

# S225



## Multi-Flute Solid Carbide Finishing End Mill

Short cut length, 6 or 8 flute design provides high rigidity for profile finishing of deep walls. Neck recess to avoid work contact with the wall and extend reach. AlTiN coating increases tool life and improves performance when milling difficult to machine materials. The 50° helix is designed for high surface finish quality.

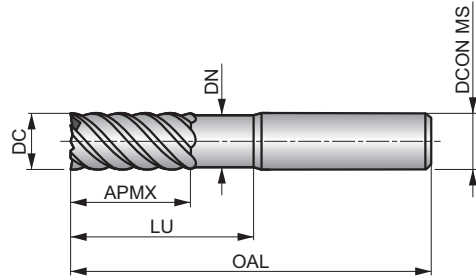

HM	N	NOF 6-8
	λ 50°	γ 3°
DIN 6535HA	AlTiN	DC h9
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P4.3</b>	<b>M2.3</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>S1.3</b>	<b>S2.2</b>	<b>S3.2</b>	<b>S4.2</b>
■ 80 G	■ 80 G	■ 82 F	■ 80 F	■ 68 F	■ 58 F	■ 47 F	■ 33 F	■ 27 F

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S2253.0	3.00	6.00	8.00	50.0	6	20.00	2.80
S2254.0	4.00	6.00	11.00	50.0	6	20.00	3.70
S2256.0	6.00	6.00	15.00	50.0	6	20.00	5.50
S2258.0	8.00	8.00	20.00	64.0	6	30.00	7.40
S22510.0	10.00	10.00	22.00	70.0	6	32.00	9.20
S22512.0	12.00	12.00	25.00	75.0	6	37.00	11.00
S22514.0	14.00	14.00	30.00	90.0	6	44.00	13.00
S22516.0	16.00	16.00	30.00	90.0	8	46.00	15.00
S22518.0	18.00	18.00	35.00	100.0	8	53.00	17.00
S22520.0	20.00	20.00	38.00	100.0	8	58.00	19.00

# S226



## Multi-Flute Solid Carbide Finishing End Mill, Long Series

Long cut length, 6 or 8 flute design provides high rigidity for finishing of deeper walls. Neck recess to avoid work contact with the wall and extend reach. AlTiN coating increases service life and improves performance when milling difficult to machine materials. The 50° helix is designed for high surface finish quality.

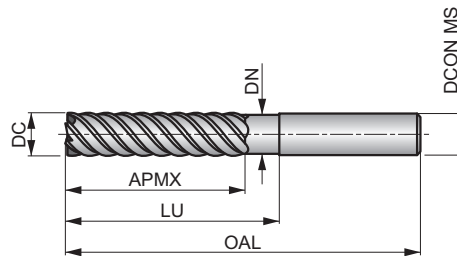

HM	N	NOF 6-8
	λ 50°	γ 3°
DIN 6535HA	AlTiN	DC h9
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P4.3</b>	<b>M2.3</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>S1.3</b>	<b>S2.2</b>	<b>S3.2</b>	<b>S4.2</b>
■ 64 G	■ 64 G	■ 65 F	■ 64 F	■ 54 F	■ 46 F	■ 38 F	■ 26 F	■ 22 F

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
<b>S2263.0</b>	3.00	6.00	19.00	75.0	6	30.00	2.80
<b>S2264.0</b>	4.00	6.00	19.00	75.0	6	32.00	3.70
<b>S2266.0</b>	6.00	6.00	31.00	75.0	6	40.00	5.50
<b>S2268.0</b>	8.00	8.00	31.00	75.0	6	40.00	7.40
<b>S22610.0</b>	10.00	10.00	45.00	100.0	6	60.00	9.20
<b>S22612.0</b>	12.00	12.00	50.00	100.0	6	60.00	11.00
<b>S22614.0</b>	14.00	14.00	57.00	125.0	6	85.00	13.00
<b>S22616.0</b>	16.00	16.00	57.00	125.0	8	85.00	15.00
<b>S22618.0</b>	18.00	18.00	57.00	125.0	8	85.00	17.00
<b>S22620.0</b>	20.00	20.00	57.00	125.0	8	85.00	19.00


# S227



## Multi-Flute Solid Carbide Finishing End Mill, Extra Long Series

Extra long cut length, 6 or 8 flute design provides high rigidity for finishing of extra deep walls. Neck recess to avoid work contact with the wall and extend reach. AlTiN coating increases tool life and improves performance when milling difficult to machine materials. The 50° helix is designed for high surface finish quality.

HM	N	NOF 6-8
	λ 50°	γ 3°
DIN 6535HA	AlTiN	DC h9
	DORMER	

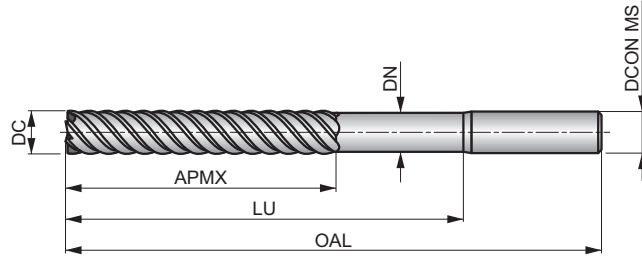

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P4.3</b> ■ 40 G	<b>M2.3</b> ■ 40 G	<b>M3.3</b> ■ 41 F	<b>M4.1</b> ■ 40 F	<b>M4.2</b> ■ 34 F	<b>S1.3</b> ■ 29 F	<b>S2.2</b> ■ 24 F	<b>S3.2</b> ■ 17 F	<b>S4.2</b> ■ 14 F
-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S2276.0	6.00	6.00	38.00	100.0	6	60.00	5.50
S2278.0	8.00	8.00	41.00	100.0	6	60.00	7.40
S22710.0	10.00	10.00	57.00	125.0	6	85.00	9.20
S22712.0	12.00	12.00	75.00	150.0	6	110.00	11.00
S22714.0	14.00	14.00	75.00	150.0	6	110.00	13.00
S22716.0	16.00	16.00	75.00	150.0	8	110.00	15.00
S22718.0	18.00	18.00	75.00	150.0	8	110.00	17.00
S22720.0	20.00	20.00	75.00	150.0	8	110.00	19.00

# S525



## Multi-Flute Solid Carbide Finishing End Mill

Short cut length, 6 or 8 flute design with 50° helix provides high rigidity for finishing of deep walls. Neck recess to avoid work contact with the wall and extend reach. TiSiN coating increases tool life and improves performance when milling hardened materials up to 63HRC.

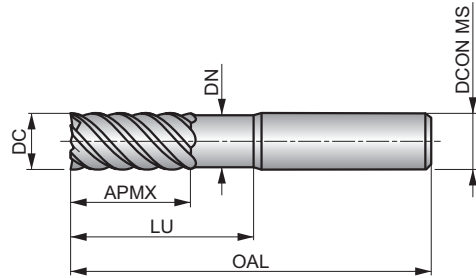

HM	N	NOF 6-8
	λ 50°	γ -26°
DIN 6535HA	TiSiN	DC h9
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b>	<b>H2.1</b>	<b>H2.2</b>	<b>H3.1</b>	<b>H3.2</b>	<b>H4.1</b>	<b>H4.2</b>
■ 119 G	■ 70 G	■ 60 E	■ 78 G	■ 64 G	■ 50 E	■ 42 A

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S5253.0	3.00	6.00	8.00	50.0	6	20.00	2.80
S5254.0	4.00	6.00	11.00	50.0	6	20.00	3.70
S5256.0	6.00	6.00	15.00	50.0	6	20.00	5.50
S5258.0	8.00	8.00	20.00	64.0	6	30.00	7.40
S52510.0	10.00	10.00	22.00	70.0	6	32.00	9.20
S52512.0	12.00	12.00	25.00	75.0	6	37.00	11.00
S52514.0	14.00	14.00	30.00	90.0	6	44.00	13.00
S52516.0	16.00	16.00	30.00	90.0	8	46.00	15.00
S52518.0	18.00	18.00	35.00	100.0	8	53.00	17.00
S52520.0	20.00	20.00	38.00	100.0	8	58.00	19.00

# S526



## Multi-Flute Solid Carbide Finishing End Mill, Long Series

Long cut length, 6 or 8 flute design with 50° helix provides high rigidity for finishing of deeper walls. Neck recess to avoid work contact with the wall and extend reach. TiSiN coating increases tool life and improves performance when milling hardened materials up to 63HRC.

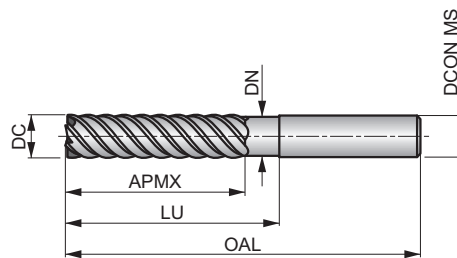

HM	N	NOF 6-8
	λ 50°	γ -26°
DIN 6358A	TiSiN	DC h9
	DORMER	



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b>	<b>H2.1</b>	<b>H2.2</b>	<b>H3.1</b>	<b>H3.2</b>	<b>H4.1</b>	<b>H4.2</b>
■ 96 G	■ 57 G	■ 49 E	■ 63 G	■ 52 G	■ 40 E	■ 34 A

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S5263.0	3.00	6.00	19.00	75.0	6	30.00	2.80
S5264.0	4.00	6.00	19.00	75.0	6	32.00	3.70
S5266.0	6.00	6.00	31.00	75.0	6	40.00	5.50
S5268.0	8.00	8.00	31.00	75.0	6	40.00	7.40
S52610.0	10.00	10.00	45.00	100.0	6	60.00	9.20
S52612.0	12.00	12.00	50.00	100.0	6	60.00	11.00
S52614.0	14.00	14.00	57.00	125.0	6	85.00	13.00
S52616.0	16.00	16.00	57.00	125.0	8	85.00	15.00
S52618.0	18.00	18.00	57.00	125.0	8	85.00	17.00
S52620.0	20.00	20.00	57.00	125.0	8	85.00	19.00


# S527



## Multi-Flute Solid Carbide Finishing End Mill, Extra Long Series

Extra long cut length, 6 or 8 flute design with 50° helix provides high rigidity for finishing of extra deep walls. Neck recess to avoid work contact with the wall and extend reach. TiSiN coating increases service life and improves performance when milling hardened materials up to 63HRC.

HM	N	NOF 6-8
	$\lambda$ 50°	$\gamma$ -26°
DIN 6535HA	TiSiN	DC h9
	DORMER	

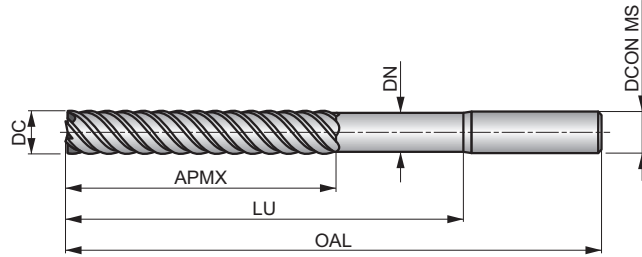

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b> ■ 59 G	<b>H2.1</b> ■ 35 G	<b>H2.2</b> ■ 30 E	<b>H3.1</b> ■ 39 G	<b>H3.2</b> ■ 32 G	<b>H4.1</b> ■ 25 E	<b>H4.2</b> ■ 21 A
-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S5273.0	3.00	6.00	25.00	100.0	6	60.00	2.80
S5274.0	4.00	6.00	31.00	100.0	6	60.00	3.70
S5276.0	6.00	6.00	38.00	100.0	6	60.00	5.50
S5278.0	8.00	8.00	41.00	100.0	6	60.00	7.40
S52710.0	10.00	10.00	57.00	125.0	6	85.00	9.20
S52712.0	12.00	12.00	75.00	150.0	6	110.00	11.00
S52716.0	16.00	16.00	75.00	150.0	8	110.00	15.00
S52720.0	20.00	20.00	75.00	150.0	8	110.00	19.00


Material code (BMC)	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM
Mill Profile	N	N	N	N	N	W	N	N	N	N	N	N
Number of flutes (NOF)	NOF 2	NOF 4	NOF 2	NOF 2	NOF 2	NOF 2	NOF 2	NOF 2	NOF 2	NOF 4	NOF 4	NOF 3-4
Cut length												
Flute Helix (FHA)	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°
Flute Helix (FHA)	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°	$\lambda$ 30°
Radial rake angle (GAMF)	$\gamma$ 10°	$\gamma$ 10°	$\gamma$ 3°	$\gamma$ 3°	$\gamma$ 3°	$\gamma$ 15°	$\gamma$ -10°	$\gamma$ -10°	$\gamma$ -10°	$\gamma$ -10°	$\gamma$ -10°	$\gamma$ 8°
Shank	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA	DIN 6535HA
Coating	X-CEED	X-CEED	TiSiN	TiSiN	TiSiN	Bright	TiSiN	TiSiN	TiSiN	TiSiN	TiSiN	AlCN
Cutting diameter tolerance class (TCDC)	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	DC h9	
Direction												
Basic standard group (BSG)												

Product Family Code	S501	S511	S229	S231	S233	S629	S529	S531	S533	S534	S535	S791
PSF cutting diameters range	1.00 – 16.00	3.00 – 16.00	1.50 – 16.00	1.50 – 16.00	2.00 – 16.00	1.00 – 20.00	1.50 – 16.00	1.50 – 16.00	2.00 – 16.00	3.00 – 16.00	3.00 – 16.00	6.00 – 16.00
	154	155	156	157	158	159	160	161	162	163	164	165

P	P1	■	■									■
	P2	■	■									■
	P3	■	■									■
	P4	■	■	■	■	■						■
M	M1	■	■									■
	M2	■	■	■	■	■						■
	M3	■	■	■	■	■						■
	M4	■	■	■	■	■						■
K	K1	■	■									■
	K2	■	■									■
	K3	■	■									■
	K4	■	■									■
	K5	■	■									■
N	N1	■	■			■						■
	N2	■	■			■						■
	N3	■	■			■						■
	N4	■	■			■						■
	N5	■	■			■						■
S	S1	■	■	■	■	■						■
	S2	■	■	■	■	■						■
	S3	■	■	■	■	■						■
	S4	■	■	■	■	■						■
H	H1						■	■	■	■	■	
	H2						■	■	■	■	■	
	H3						■	■	■	■	■	
	H4						■	■	■	■	■	


Primary use
  Possible use

# S501



## 2-Flute Solid Carbide Ball-Nosed End Mill

Short cut length, 2-flute design reduces vibrations and provides increased strength. Ball nosed geometry is designed for high performance contouring of complex surfaces. The X-CEED coating provides improved performance for milling difficult to machine materials.

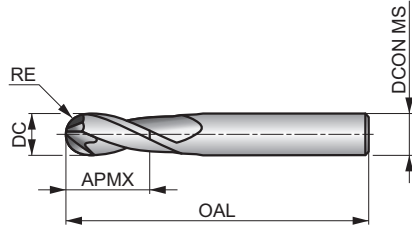

HM	N	NOF 2
	$\lambda$ 30°	$\gamma$ 10°
DIN 6535HA	X-CEED	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 161 F	<b>P1.2</b> ■ 181 F	<b>P1.3</b> ■ 186 F	<b>P2.1</b> ■ 138 F	<b>P2.2</b> ■ 121 F	<b>P2.3</b> ■ 108 F	<b>P3.1</b> ■ 112 F	<b>P3.2</b> ■ 90 F	<b>P3.3</b> ■ 76 F	<b>P4.1</b> ■ 66 F	<b>P4.2</b> ■ 57 F	<b>P4.3</b> ▣ 46 F	<b>M1.1</b> ■ 94 F	<b>M1.2</b> ■ 79 F
<b>M2.1</b> ■ 83 F	<b>M2.2</b> ■ 69 F	<b>M3.1</b> ▣ 77 F	<b>M3.2</b> ▣ 66 F	<b>M3.3</b> ▣ 59 E	<b>M4.1</b> ▣ 58 E	<b>K1.1</b> ■ 161 F	<b>K1.2</b> ■ 119 F	<b>K1.3</b> ■ 89 F	<b>K2.1</b> ■ 165 F	<b>K2.2</b> ■ 134 F	<b>K2.3</b> ■ 107 F	<b>K3.1</b> ■ 146 F	<b>K3.2</b> ■ 112 F
<b>K3.3</b> ■ 90 F	<b>K4.1</b> ■ 136 F	<b>K4.2</b> ■ 102 F	<b>K4.3</b> ■ 75 F	<b>K4.4</b> ■ 64 E	<b>K4.5</b> ■ 54 E	<b>K5.1</b> ■ 154 F	<b>K5.2</b> ■ 115 F	<b>K5.3</b> ■ 89 F	<b>N1.1</b> ▣ 355 G	<b>N1.2</b> ▣ 267 G	<b>N1.3</b> ▣ 179 G	<b>N2.1</b> ▣ 179 F	<b>N2.2</b> ▣ 160 F
<b>N2.3</b> ▣ 115 F	<b>N3.1</b> ■ 187 F	<b>N3.2</b> ■ 109 F	<b>N3.3</b> ▣ 56 F	<b>N4.1</b> ▣ 187 F	<b>N4.2</b> ▣ 72 F	<b>S1.1</b> ▣ 126 F	<b>S1.2</b> ▣ 112 F	<b>S2.1</b> ▣ 186 E	<b>S3.1</b> ▣ 65 E	<b>S4.1</b> ▣ 51 E			

DCON MS tolerance h6; RE ±0.01 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S5011.0	1.00	0.50	3.00	3.00	38.0	2
S5011.5	1.50	0.75	3.00	3.00	38.0	2
S5012.0	2.00	1.00	3.00	6.00	38.0	2
S5012.5	2.50	1.25	3.00	7.00	38.0	2
S5013.0	3.00	1.50	3.00	7.00	38.0	2
S5014.0	4.00	2.00	6.00	8.00	57.0	2
S5015.0	5.00	2.50	6.00	10.00	57.0	2
S5016.0	6.00	3.00	6.00	10.00	57.0	2
S5017.0	7.00	3.50	8.00	13.00	63.0	2
S5018.0	8.00	4.00	8.00	16.00	63.0	2
S5019.0	9.00	4.50	10.00	16.00	72.0	2
S50110.0	10.00	5.00	10.00	19.00	72.0	2
S50112.0	12.00	6.00	12.00	22.00	83.0	2
S50116.0	16.00	8.00	16.00	26.00	92.0	2

# S511



## 4-Flute Solid Carbide Ball-Nosed End Mill, Extra Long Reach

Short cut length, extra long reach, 4-flute design provides high rigidity for increased strength and reduces vibrations in deeper applications. Ball nosed geometry is designed for high performance contouring of complex surfaces. X-CEED coating provides improved performance for milling difficult to machine materials.

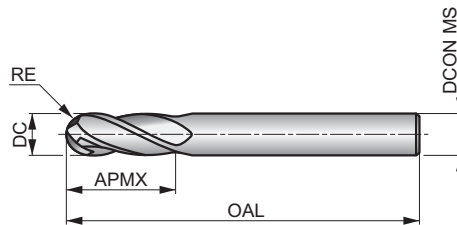

HM	N	NOF 4
	$\lambda$ 30°	$\gamma$ 10°
DIN 6535HA	X-CEED	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 161 E	<b>P1.2</b> ■ 181 E	<b>P1.3</b> ■ 186 E	<b>P2.1</b> ■ 138 E	<b>P2.2</b> ■ 121 E	<b>P2.3</b> ■ 108 E	<b>P3.1</b> ■ 112 E	<b>P3.2</b> ■ 90 E	<b>P3.3</b> ■ 76 E	<b>P4.1</b> ■ 66 E	<b>P4.2</b> ■ 57 E	<b>P4.3</b> ▣ 46 E	<b>M1.1</b> ■ 94 E	<b>M1.2</b> ■ 79 E
<b>M2.1</b> ■ 83 E	<b>M2.2</b> ■ 69 E	<b>M3.1</b> ▣ 77 E	<b>M3.2</b> ▣ 66 E	<b>M3.3</b> ▣ 59 D	<b>M4.1</b> ▣ 58 D	<b>K1.1</b> ■ 161 E	<b>K1.2</b> ■ 119 E	<b>K1.3</b> ■ 89 E	<b>K2.1</b> ■ 165 E	<b>K2.2</b> ■ 134 E	<b>K2.3</b> ■ 107 E	<b>K3.1</b> ■ 146 E	<b>K3.2</b> ■ 112 E
<b>K3.3</b> ■ 90 E	<b>K4.1</b> ■ 136 E	<b>K4.2</b> ■ 102 E	<b>K4.3</b> ■ 75 E	<b>K4.4</b> ■ 64 D	<b>K4.5</b> ■ 54 D	<b>K5.1</b> ■ 154 E	<b>K5.2</b> ■ 115 E	<b>K5.3</b> ■ 89 E	<b>N1.1</b> ▣ 355 F	<b>N1.2</b> ▣ 267 F	<b>N1.3</b> ▣ 179 F	<b>N2.1</b> ▣ 179 E	<b>N2.2</b> ▣ 160 E
<b>N2.3</b> ▣ 115 E	<b>N3.1</b> ■ 187 E	<b>N3.2</b> ■ 109 E	<b>N3.3</b> ▣ 56 E	<b>N4.1</b> ▣ 187 E	<b>N4.2</b> ▣ 72 E	<b>S1.1</b> ▣ 126 E	<b>S1.2</b> ▣ 112 E	<b>S2.1</b> ▣ 186 D	<b>S3.1</b> ▣ 65 D	<b>S4.1</b> ▣ 51 D			

DCON MS tolerance h6; RE +0/-0.01 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF
S5113.0	3.00	1.50	6.00	8.00	80.0	4
S5114.0	4.00	2.00	6.00	11.00	80.0	4
S5115.0	5.00	2.50	6.00	13.00	80.0	4
S5116.0	6.00	3.00	6.00	13.00	80.0	4
S5117.0	7.00	3.50	8.00	16.00	100.0	4
S5118.0	8.00	4.00	8.00	19.00	100.0	4
S5119.0	9.00	4.50	10.00	19.00	100.0	4
S51110.0	10.00	5.00	10.00	22.00	100.0	4
S51112.0	12.00	6.00	12.00	26.00	100.0	4
S51116.0	16.00	8.00	16.00	32.00	100.0	4

# S229



## 2-Flute Solid Carbide Ball-Nosed End Mill

Extra short cut length, 2-flute design with neck recess reduces vibrations and provides high rigidity. Ball nosed geometry is designed for high performance contouring of complex surfaces. TiSiN coating increases service life of the milling cutter and improves performance when milling difficult to machine materials.

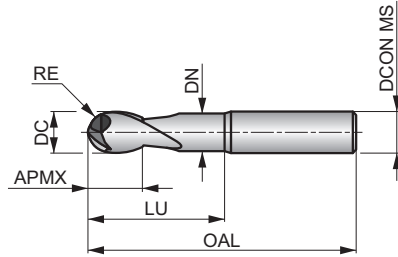

HM	N	NOF 2
	$\lambda$ 30°	$\gamma$ 3°
DIN 6535HA	TiSiN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P4.3</b> ■ 80 F	<b>M2.3</b> ■ 80 F	<b>M3.3</b> ■ 82 F	<b>M4.1</b> ■ 80 F	<b>M4.2</b> ■ 68 F	<b>S1.3</b> ■ 58 F	<b>S2.2</b> ■ 47 F	<b>S3.2</b> ■ 33 F	<b>S4.2</b> ■ 27 F
-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

DCON MS tolerance h6; RE +0/-0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S2291.5XD4	1.50	0.75	4.00	3.00	50.0	2	6.00	1.40
S2292.0XD3	2.00	1.00	3.00	4.00	50.0	2	8.00	1.90
S2292.0XD4	2.00	1.00	4.00	4.00	50.0	2	8.00	1.90
S2293.0XD3	3.00	1.50	3.00	5.00	50.0	2	14.00	2.80
S2293.0XD6	3.00	1.50	6.00	5.00	50.0	2	14.00	2.80
S2294.0XD4	4.00	2.00	4.00	8.00	50.0	2	20.00	3.70
S2294.0XD6	4.00	2.00	6.00	8.00	50.0	2	20.00	3.70
S2295.0XD5	5.00	2.50	5.00	9.00	50.0	2	20.00	4.60
S2295.0XD6	5.00	2.50	6.00	9.00	50.0	2	20.00	4.60
S2296.0	6.00	3.00	6.00	10.00	50.0	2	20.00	5.50
S2298.0	8.00	4.00	8.00	12.00	64.0	2	30.00	7.40
S22910.0	10.00	5.00	10.00	14.00	70.0	2	32.00	9.20
S22912.0	12.00	6.00	12.00	16.00	75.0	2	38.00	11.00
S22914.0	14.00	7.00	14.00	32.00	90.0	2	44.00	13.00
S22916.0	16.00	8.00	16.00	32.00	90.0	2	46.00	15.00

# S231



## 2-Flute Solid Carbide Ball-Nosed End Mill, Long Reach

Extra short cut length, long reach, 2-flute design with neck recess provides high rigidity and reduces vibrations. Ball nosed geometry is designed for high performance contouring of complex surfaces. TiSiN coating increases tool life and improves performance when milling difficult to machine materials.

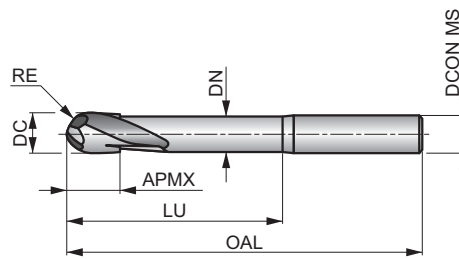

HM	N	NOF 2
	$\lambda$ 30°	$\gamma$ 3°
DIN 6535HA	TiSiN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P4.3</b>	<b>M2.3</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>S1.3</b>	<b>S2.2</b>	<b>S3.2</b>	<b>S4.2</b>
■ 64 F	■ 64 F	■ 65 F	■ 64 F	■ 54 F	■ 46 F	■ 38 F	■ 26 F	■ 22 F

DCON MS tolerance h6; RE +0/-0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S2311.5XD4	1.50	0.75	4.00	3.00	75.0	2	10.00	1.40
S2312.0XD3	2.00	1.00	3.00	4.00	60.0	2	14.00	1.90
S2312.0XD4	2.00	1.00	4.00	4.00	75.0	2	14.00	1.90
S2313.0XD3	3.00	1.50	3.00	5.00	60.0	2	21.00	2.80
S2313.0XD6	3.00	1.50	6.00	5.00	75.0	2	21.00	2.80
S2314.0XD4	4.00	2.00	4.00	8.00	60.0	2	28.00	3.70
S2314.0XD6	4.00	2.00	6.00	8.00	75.0	2	28.00	3.70
S2315.0	5.00	2.50	5.00	9.00	60.0	2	32.00	4.60
S2316.0	6.00	3.00	6.00	10.00	75.0	2	40.00	5.50
S2318.0	8.00	4.00	8.00	10.00	75.0	2	40.00	7.40
S23110.0	10.00	5.00	10.00	12.00	75.0	2	40.00	9.20
S23112.0	12.00	6.00	12.00	16.00	100.0	2	60.00	11.00
S23116.0	16.00	8.00	16.00	32.00	125.0	2	80.00	15.00

# S233



## 2-Flute Solid Carbide Ball-Nosed End Mill, Extra Long Reach

Extra short cut length, extra long reach, 2-flute design with neck recess provides high rigidity and reduces vibrations. Ball nosed geometry is designed for high performance contouring of complex surfaces. TiSiN coating increases tool life and improves performance when milling difficult to machine materials.

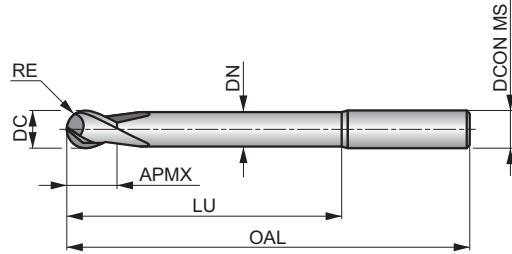

HM	N	NOF 2
	$\lambda$ 30°	$\gamma$ 3°
DIN 6535HA	TiSiN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P4.3</b> ■ 40 F	<b>M2.3</b> ■ 40 F	<b>M3.3</b> ■ 41 F	<b>M4.1</b> ■ 40 F	<b>M4.2</b> ■ 34 F	<b>S1.3</b> ■ 29 F	<b>S2.2</b> ■ 24 F	<b>S3.2</b> ■ 17 F	<b>S4.2</b> ■ 14 F
-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

DCON MS tolerance h6; RE +0/-0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S2332.0XD3	2.00	1.00	3.00	4.00	100.0	2	20.00	1.90
S2332.0XD4	2.00	1.00	4.00	4.00	100.0	2	20.00	1.90
S2333.0XD3	3.00	1.50	3.00	5.00	100.0	2	30.00	2.80
S2333.0XD6	3.00	1.50	6.00	5.00	100.0	2	30.00	2.80
S2334.0XD4	4.00	2.00	4.00	8.00	100.0	2	40.00	3.70
S2334.0XD6	4.00	2.00	6.00	8.00	100.0	2	40.00	3.70
S2335.0	5.00	2.50	5.00	9.00	100.0	2	50.00	4.60
S2336.0	6.00	3.00	6.00	10.00	100.0	2	60.00	5.50
S2338.0	8.00	4.00	8.00	12.00	100.0	2	60.00	7.40
S23310.0	10.00	5.00	10.00	14.00	125.0	2	85.00	9.20
S23312.0	12.00	6.00	12.00	16.00	125.0	2	85.00	11.00
S23314.0	14.00	7.00	14.00	32.00	150.0	2	110.00	13.00
S23316.0	16.00	8.00	16.00	32.00	150.0	2	110.00	15.00

# S629



## 2-Flute Solid Carbide Ball-Nosed End Mill

Extra short cut length, 2-flute design with neck recess reduces vibrations and provides high rigidity. Ball nosed geometry is designed for high performance contouring of complex surfaces in non-ferrous materials.

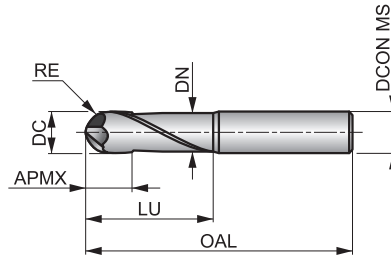

HM	W	NOF 2
	$\lambda$ 30°	$\gamma$ 15°
DIN 6535HA	Bright	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>N1.1</b>	<b>N1.2</b>	<b>N1.3</b>	<b>N2.1</b>	<b>N2.2</b>	<b>N2.3</b>	<b>N3.1</b>	<b>N3.2</b>	<b>N3.3</b>	<b>N4.1</b>	<b>N4.2</b>
709 N	533 N	357 N	357 N	320 N	229 N	373 N	219 N	112 N	373 0	144 0

DCON MS tolerance h6; RE +0/-0.02 mm.

Product	DC	RE	DCON MS	APMX	OAL	NOF	LU	DN
	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)
S6291.0 <sup>1)</sup>	1.00	0.50	4.00	0.80	50.0	2	10.00	0.90
S6291.5 <sup>1)</sup>	1.50	0.75	4.00	1.20	50.0	2	12.00	1.40
S6292.0 <sup>1)</sup>	2.00	1.00	4.00	1.60	60.0	2	18.00	1.90
S6293.0	3.00	1.50	6.00	5.00	57.0	2	20.00	2.80
S6294.0	4.00	2.00	6.00	6.00	57.0	2	20.00	3.70
S6295.0	5.00	2.50	6.00	7.00	57.0	2	20.00	4.60
S6296.0	6.00	3.00	6.00	8.00	57.0	2	20.00	5.50
S6298.0	8.00	4.00	8.00	10.00	64.0	2	25.00	7.40
S62910.0	10.00	5.00	10.00	12.00	75.0	2	35.00	9.20
S62912.0	12.00	6.00	12.00	14.00	75.0	2	35.00	11.00
S62916.0	16.00	8.00	16.00	18.00	90.0	2	45.00	15.00
S62920.0	20.00	10.00	20.00	22.00	100.0	2	50.00	19.00


<sup>1)</sup> Rake angle 11°.

# S529



## 2-Flute Solid Carbide Ball-Nosed End Mill

Extra short cut length, 2-flute design with neck recess provides high rigidity and reduces vibrations. Ball nosed geometry is designed for high performance contouring of complex surfaces. TiSiN coating increases tool life and improves performance when machining hardened materials up to 63HRC.

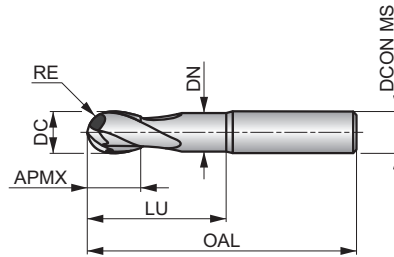

HM	N	NOF 2
	$\lambda$ 30°	$\gamma$ -10°
DIN 6535HA	TiSiN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b> ■ 119 F	<b>H2.1</b> ■ 70 E	<b>H2.2</b> ■ 60 D	<b>H3.1</b> ■ 78 E	<b>H3.2</b> ■ 64 E	<b>H4.1</b> ■ 50 D	<b>H4.2</b> ■ 42 A
------------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

DCON MS tolerance h6; RE +0/-0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S5291.5	1.50	0.75	6.00	3.00	50.0	2	6.00	1.40
S5292.0XD4	2.00	1.00	4.00	4.00	50.0	2	8.00	1.90
S5292.0XD6	2.00	1.00	6.00	4.00	50.0	2	8.00	1.90
S5293.0XD3	3.00	1.50	3.00	5.00	50.0	2	14.00	2.80
S5293.0XD6	3.00	1.50	6.00	5.00	50.0	2	14.00	2.80
S5294.0XD4	4.00	2.00	4.00	8.00	50.0	2	20.00	3.70
S5294.0XD6	4.00	2.00	6.00	8.00	50.0	2	20.00	3.70
S5295.0XD5	5.00	2.50	5.00	9.00	50.0	2	20.00	4.60
S5295.0XD6	5.00	2.50	6.00	9.00	50.0	2	20.00	4.60
S5296.0	6.00	3.00	6.00	10.00	50.0	2	20.00	5.50
S5298.0	8.00	4.00	8.00	12.00	64.0	2	30.00	7.40
S52910.0	10.00	5.00	10.00	14.00	70.0	2	32.00	9.20
S52912.0	12.00	6.00	12.00	16.00	75.0	2	38.00	11.00
S52916.0	16.00	8.00	16.00	32.00	90.0	2	46.00	15.00

# S531



## 2-Flute Solid Carbide Ball-Nosed End Mill, Long Reach

Extra short cut length, long reach, 2-flute design with neck recess provides high rigidity and reduces vibrations. Ball nosed geometry is designed for high performance contouring of complex surfaces. TiSiN coating increases tool life and improves performance when machining hardened materials up to 63HRC.

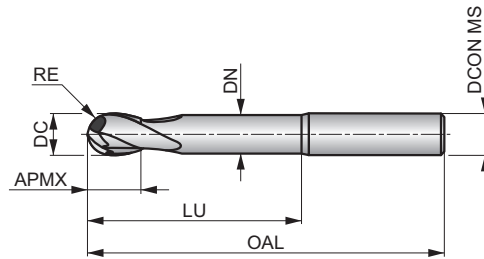

HM	N	NOF 2
	$\lambda$ 30°	$\gamma$ -10°
DIN 6335HA	TiSiN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b> ■ 96 F	<b>H2.1</b> ■ 57 E	<b>H2.2</b> ■ 49 D	<b>H3.1</b> ■ 63 E	<b>H3.2</b> ■ 52 E	<b>H4.1</b> ■ 40 D	<b>H4.2</b> ■ 34 A
-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

DCON MS tolerance h6; RE +0/-0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S5311.5	1.50	0.75	6.00	3.00	75.0	2	10.00	1.40
S5312.0XD4	2.00	1.00	4.00	4.00	75.0	2	14.00	1.90
S5312.0XD6	2.00	1.00	6.00	4.00	75.0	2	14.00	1.90
S5313.0XD3	3.00	1.50	3.00	5.00	60.0	2	21.00	2.80
S5313.0XD6	3.00	1.50	6.00	5.00	75.0	2	21.00	2.80
S5314.0XD4	4.00	2.00	4.00	8.00	60.0	2	28.00	3.70
S5314.0XD6	4.00	2.00	6.00	8.00	75.0	2	28.00	3.70
S5315.0XD5	5.00	2.50	5.00	9.00	60.0	2	32.00	4.60
S5315.0XD6	5.00	2.50	6.00	9.00	75.0	2	32.00	4.60
S5316.0	6.00	3.00	6.00	10.00	75.0	2	40.00	5.50
S5318.0	8.00	4.00	8.00	12.00	75.0	2	40.00	7.40
S53110.0	10.00	5.00	10.00	14.00	75.0	2	40.00	9.20
S53112.0	12.00	6.00	12.00	16.00	100.0	2	60.00	11.00
S53116.0	16.00	8.00	16.00	32.00	125.0	2	80.00	15.00

# S533



## 2-Flute Solid Carbide Ball-Nosed End Mill, Extra Long Reach

Extra short cut length, extra long reach, 2-flute design with neck recess provides high rigidity and reduces vibrations. Ball nosed geometry is designed for high performance contouring of complex surfaces. TiSiN coating increases tool life and improves performance when machining hardened materials up to 63HRC.

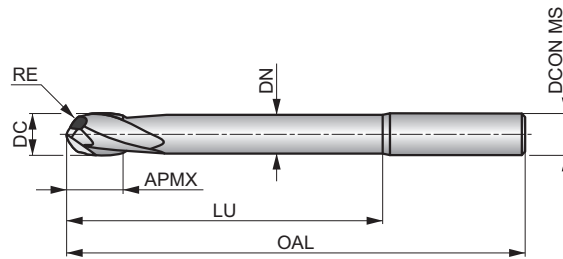

HM	N	NOF 2
	$\lambda$ 30°	$\gamma$ -10°
DIN 6535HA	TiSiN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b> ■ 59 F	<b>H2.1</b> ■ 35 E	<b>H2.2</b> ■ 30 D	<b>H3.1</b> ■ 39 E	<b>H3.2</b> ■ 32 E	<b>H4.1</b> ■ 25 D	<b>H4.2</b> ■ 21 A
-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

DCON MS tolerance h6; RE +0/-0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S5332.0XD4	2.00	1.00	4.00	4.00	100.0	2	20.00	1.90
S5332.0XD6	2.00	1.00	6.00	4.00	100.0	2	20.00	1.90
S5333.0XD4	3.00	1.50	4.00	5.00	100.0	2	30.00	2.80
S5333.0XD6	3.00	1.50	6.00	5.00	100.0	2	30.00	2.80
S5334.0XD4	4.00	2.00	4.00	8.00	100.0	2	40.00	3.70
S5334.0XD6	4.00	2.00	6.00	8.00	100.0	2	40.00	3.70
S5335.0XD5	5.00	2.50	5.00	9.00	100.0	2	50.00	4.60
S5335.0XD6	5.00	2.50	6.00	9.00	100.0	2	50.00	4.60
S5336.0	6.00	3.00	6.00	10.00	100.0	2	60.00	5.50
S5338.0	8.00	4.00	8.00	12.00	100.0	2	60.00	7.40
S53310.0	10.00	5.00	10.00	14.00	125.0	2	85.00	9.20
S53312.0	12.00	6.00	12.00	16.00	125.0	2	85.00	11.00
S53314.0	14.00	7.00	14.00	32.00	150.0	2	110.00	13.00
S53316.0	16.00	8.00	16.00	32.00	150.0	2	110.00	15.00

# S534



## 4-Flute Solid Carbide Ball-Nosed End Mill

Extra short cut length, 4-flute design with neck recess reduces vibrations and provides high rigidity. Ball nosed geometry is designed for high performance contouring of complex surfaces. TiSiN coating increases tool life and improves performance when machining hardened materials up to 63HRC.

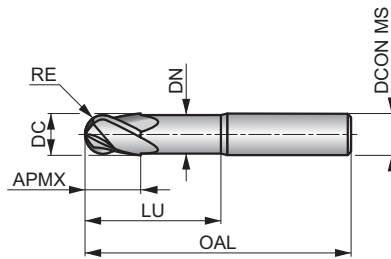

HM	N	NOF 4
	$\lambda$ 30°	$\gamma$ -10°
DIN 6535HA	TSiN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b>	<b>H2.1</b>	<b>H2.2</b>	<b>H3.1</b>	<b>H3.2</b>	<b>H4.1</b>	<b>H4.2</b>
■ 119 E	■ 70 D	■ 60 C	■ 78 D	■ 64 D	■ 50 C	■ 42 A

DCON MS tolerance h6; RE +0/-0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S5343.0	3.00	1.50	6.00	5.00	50.0	4	14.00	2.80
S5344.0	4.00	2.00	6.00	8.00	50.0	4	20.00	3.70
S5345.0	5.00	2.50	6.00	9.00	50.0	4	20.00	4.60
S5346.0	6.00	3.00	6.00	10.00	50.0	4	20.00	5.50
S5348.0	8.00	4.00	8.00	12.00	64.0	4	30.00	7.40
S53410.0	10.00	5.00	10.00	14.00	70.0	4	32.00	9.20
S53412.0	12.00	6.00	12.00	16.00	75.0	4	38.00	11.00
S53414.0	14.00	7.00	14.00	32.00	90.0	4	44.00	13.00
S53416.0	16.00	8.00	16.00	32.00	90.0	4	46.00	15.00

# S535



## 4-Flute Solid Carbide Ball-Nosed End Mill, Long Reach

Extra short cut length, long reach, 4-flute design with neck recess reduces vibrations and provides high rigidity. Ball nosed geometry is designed for high performance contouring of complex surfaces. TiSiN coating increases tool life and improves performance when machining hardened materials up to 63HRC.

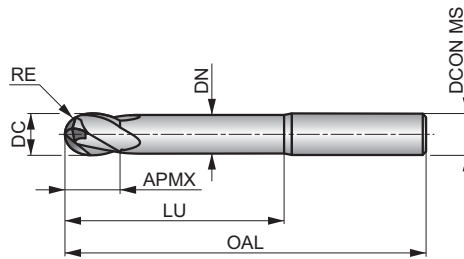

HM	N	NOF 4
	$\lambda$ 30°	$\gamma$ -10°
DIN 6335HA	TiSiN	DC h9



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>H1.1</b> ■ 96 E	<b>H2.1</b> ■ 57 D	<b>H2.2</b> ■ 49 C	<b>H3.1</b> ■ 63 D	<b>H3.2</b> ■ 52 D	<b>H4.1</b> ■ 40 C	<b>H4.2</b> ■ 34 A
-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

DCON MS tolerance h6; RE +0/-0.02 mm.


Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S5353.0	3.00	1.50	6.00	5.00	75.0	4	21.00	2.80
S5354.0	4.00	2.00	6.00	8.00	75.0	4	28.00	3.70
S5355.0	5.00	2.50	6.00	9.00	75.0	4	32.00	4.60
S5356.0	6.00	3.00	6.00	10.00	75.0	4	40.00	5.50
S5358.0	8.00	4.00	8.00	12.00	75.0	4	40.00	7.40
S53510.0	10.00	5.00	10.00	14.00	75.0	4	40.00	9.20
S53512.0	12.00	6.00	12.00	16.00	100.0	4	60.00	11.00
S53514.0	14.00	7.00	14.00	32.00	125.0	4	80.00	13.00
S53516.0	16.00	8.00	16.00	32.00	125.0	4	80.00	15.00

# S791



## 3-4 Flute Solid Carbide Barrel-Shape End Mill

Medium cut length, 3 or 4 flute design with large tangential radius and ball nosed to increase contact with workpiece to reduce cycle time and improve surface finish of steep walls. AlCrN coating improves performance and extends the tool life. For semi-finishing and finishing operation.

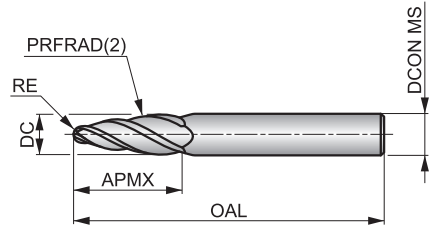

HM	N	NOF 3-4
	$\lambda$ 30°	$\gamma$ 8°
DIN 6535HA	AlCrN	
DORMER		



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 161 F	<b>P1.2</b> ■ 181 F	<b>P1.3</b> ■ 186 F	<b>P2.1</b> ■ 138 F	<b>P2.2</b> ■ 121 F	<b>P2.3</b> ■ 108 E	<b>P3.1</b> ■ 112 F	<b>P3.2</b> ■ 90 E	<b>P3.3</b> ■ 76 E	<b>P4.1</b> ■ 66 E	<b>P4.2</b> ■ 57 E	<b>P4.3</b> ▣ 46 E	<b>M1.1</b> ■ 94 F	<b>M1.2</b> ■ 79 F
<b>M2.1</b> ■ 83 F	<b>M2.2</b> ■ 69 E	<b>M3.1</b> ▣ 77 E	<b>M3.2</b> ▣ 66 E	<b>M3.3</b> ▣ 59 E	<b>M4.1</b> ▣ 58 E	<b>K1.1</b> ■ 161 F	<b>K1.2</b> ■ 119 F	<b>K1.3</b> ■ 89 F	<b>K2.1</b> ■ 165 F	<b>K2.2</b> ■ 134 F	<b>K2.3</b> ■ 107 E	<b>K3.1</b> ■ 146 F	<b>K3.2</b> ■ 112 F
<b>K3.3</b> ■ 90 E	<b>K4.1</b> ■ 136 E	<b>K4.2</b> ■ 102 E	<b>K4.3</b> ■ 75 E	<b>K4.4</b> ■ 64 E	<b>K4.5</b> ■ 54 E	<b>K5.1</b> ■ 154 E	<b>K5.2</b> ■ 115 E	<b>K5.3</b> ■ 89 E	<b>N1.1</b> ▣ 1355 I	<b>N1.2</b> ▣ 1267 I	<b>N1.3</b> ▣ 1179 I	<b>N2.1</b> ▣ 1179 F	<b>N2.2</b> ▣ 1160 F
<b>N2.3</b> ▣ 115 F	<b>N3.1</b> ■ 187 F	<b>N3.2</b> ■ 109 F	<b>N3.3</b> ▣ 56 F	<b>N4.1</b> ▣ 187 F	<b>N4.2</b> ▣ 72 F	<b>S1.1</b> ▣ 58 E	<b>S1.2</b> ▣ 56 E	<b>S2.1</b> ▣ 43 E	<b>S3.1</b> ▣ 33 E	<b>S4.1</b> ▣ 26 E			

DCN MS tolerance h6; RE ±0.01 mm; PRFRAD(2) ±0.01 mm.

Product	DC (mm)	RE (mm)	PRFRAD(2) (mm)	DCN MS (mm)	APMX (mm)	OAL (mm)	NOF
<b>S7916.0</b>	6.00	1.00	95.0	6.00	22.00	67.0	3
<b>S7918.0</b>	8.00	1.00	90.0	8.00	25.00	75.0	3
<b>S79110.0</b>	10.00	2.00	85.0	10.00	26.00	75.0	4
<b>S79112.0</b>	12.00	2.00	80.0	12.00	28.00	83.0	4
<b>S79116.0</b>	16.00	3.00	75.0	16.00	31.00	90.0	4

Thread form (THFT)												
Basic standard group (BSG)												
Usable length (ULDR)	2×D	2×D	2×D	2×D	1.5×D	1.5×D	2×D	2×D		1.5×D		
Material code (BMC)	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM		
Flute Geometry (FDC)												
Flute helix angle (FHA)	λ 10°	λ 10°	λ 27°	λ 27°	λ 10°	λ 10°	λ 10°	λ 10°	λ 10°	λ 10°		
Hand (Cutting direction)												
Coating												
Shank												
Coolant exit style (CXSC)												



Product Family Code	J200	J205	J210	J215	J220	J225	J235	J245	J260	J280		
PSF cutting diameters range	M4 – M16	M8 – M16	M6 – M16	M6 – M16	M6 – M24	M12 – M18	1/4 – 3/4	1/4 – 3/4	1/8 – 2"	1/8 – 3"		
	168	169	170	171	172	173	174	175	176	177		


<b>P</b>	P1	■	■	■	■	■	■	■	■	■		
	P2	■	■	■	■	■	■	■	■	■		
	P3	■	■	■	■	■	■	■	■	■		
	P4	■	■	■	■	■	■	■	■	■		
<b>M</b>	M1	■	■	■	■	■	■	■	■	■		
	M2	■	■	■	■	■	■	■	■	■		
	M3	■	■	■	■	■	■	■	■	■		
	M4	▣	▣	■	■	▣	▣	■	■	■		
<b>K</b>	K1	■	■	■	■	■	■	■	■	■		
	K2	■	■	■	■	■	■	■	■	■		
	K3	■	■	■	■	■	■	■	■	■		
	K4	■	■	■	■	■	■	■	■	■		
	K5	■	■	■	■	■	■	■	■	■		
<b>N</b>	N1	■	■	■	■	■	■	■	■	■		
	N2	■	■	■	■	■	■	■	■	■		
	N3	■	■	■	■	■	■	■	■	■		
	N4	■	■	■	■	■	■	■	■	■		
	N5	■	■	■	■	■	■	■	■	■		
<b>S</b>	S1	▣	■	▣	■	▣	■	■	■	■		
	S2	▣	▣	▣	▣	▣	▣	▣	▣	▣		
	S3	▣	▣	▣	▣	▣	▣	▣	▣	▣		
	S4	▣	▣	▣	▣	▣	■	▣	▣	▣		
<b>H</b>	H1	▣	▣	■	■	■	■	■	■	■		
	H2											
	H3			▣	▣	▣	▣	▣	▣	▣		
	H4											

# J200



## Solid Carbide Thread Mill with Countersink, Metric

Universal high performance tool to machine same or bigger diameters than the TDZ with the same pitch. Left or right-hand, through or blind holes almost down to the bottom. With 60° countersink for chamfering in a single machining cycle. Alcrona Pro coated for the best machining result in a wide range of materials.

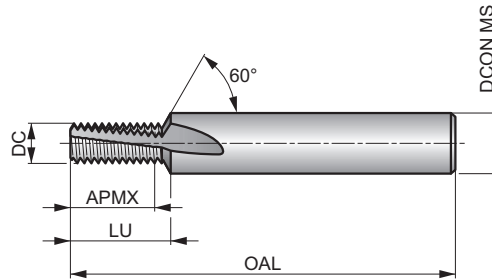

		2xD
HM		$\lambda$ 10°
	Alcrona Pro	DIN 6535HA

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 172 B	<b>P1.2</b> ■ 193 B	<b>P1.3</b> ■ 200 B	<b>P2.1</b> ■ 148 B	<b>P2.2</b> ■ 130 B	<b>P2.3</b> ■ 115 B	<b>P3.1</b> ■ 133 B	<b>P3.2</b> ■ 107 B	<b>P3.3</b> ■ 90 B	<b>P4.1</b> ■ 79 B	<b>P4.2</b> ■ 67 B	<b>P4.3</b> ▣ 55 B	<b>M1.1</b> ■ 62 B	<b>M1.2</b> ■ 52 B
<b>M2.1</b> ■ 55 B	<b>M2.2</b> ■ 45 B	<b>M2.3</b> ▣ 38 B	<b>M3.1</b> ■ 47 A	<b>M3.2</b> ■ 40 A	<b>M3.3</b> ▣ 36 A	<b>M4.1</b> ■ 30 A	<b>M4.2</b> ▣ 26 A	<b>K1.1</b> ■ 130 B	<b>K1.2</b> ■ 96 B	<b>K1.3</b> ■ 72 B	<b>K2.1</b> ■ 123 B	<b>K2.2</b> ■ 100 B	<b>K2.3</b> ■ 80 B
<b>K3.1</b> ■ 109 B	<b>K3.2</b> ■ 83 B	<b>K3.3</b> ■ 67 B	<b>K4.1</b> ■ 101 A	<b>K4.2</b> ■ 76 A	<b>K4.3</b> ■ 56 A	<b>K4.4</b> ■ 48 A	<b>K4.5</b> ▣ 40 A	<b>K5.1</b> ■ 114 B	<b>K5.2</b> ■ 86 B	<b>K5.3</b> ■ 66 B	<b>N1.1</b> ■ 400 C	<b>N1.2</b> ■ 300 C	<b>N1.3</b> ■ 200 C
<b>N2.1</b> ■ 262 C	<b>N2.2</b> ■ 235 C	<b>N2.3</b> ■ 170 C	<b>N3.1</b> ■ 610 C	<b>N3.2</b> ■ 360 C	<b>N3.3</b> ■ 180 C	<b>N4.1</b> ■ 290 C	<b>N4.2</b> ■ 145 C	<b>N4.3</b> ■ 65 C	<b>S1.1</b> ■ 40 A	<b>S1.2</b> ▣ 40 A	<b>S1.3</b> ▣ 30 A	<b>S2.1</b> ▣ 33 A	<b>S2.2</b> ▣ 25 A
<b>S3.1</b> ▣ 25 A	<b>S3.2</b> ▣ 21 A	<b>S4.1</b> ▣ 20 A	<b>S4.2</b> ▣ 16 A	<b>H1.1</b> ▣ 60 A									

Internal Thread.


Product	TDZ	TP	DC	APMX	OAL	DCON MS	NOF	LU
		(mm)	(mm)	(mm)	(mm)	(mm)		
J2003.2X.7	M4	0.70	3.20	8.40	57.0	6.00	3	9.50
J2004.1X.8	M5	0.80	4.10	11.20	57.0	6.00	3	12.10
J2004.8X1.0	M6	1.00	4.80	13.00	63.0	8.00	3	14.40
J2006.5X1.25	M8	1.25	6.50	17.50	72.0	10.00	3	19.10
J2008.2X1.5	M10	1.50	8.20	21.00	83.0	12.00	3	22.80
J2009.9X1.75	M12	1.75	9.90	26.25	83.0	14.00	4	28.20
J20011.6X2.0	M14	2.00	11.60	30.00	92.0	16.00	4	32.20
J20013.6X2.0	M16	2.00	13.60	34.00	92.0	18.00	4	36.20

# J205



## Solid Carbide Thread Mill with Through Coolant and Countersink, Metric

Universal high performance tool to machine same or bigger diameters than the TDZ with the same pitch. Left or right-hand, through or blind holes almost down to the bottom. 60° countersink for chamfering. Alcrona Pro coated for the best machining result with through coolant for better chip evacuation.

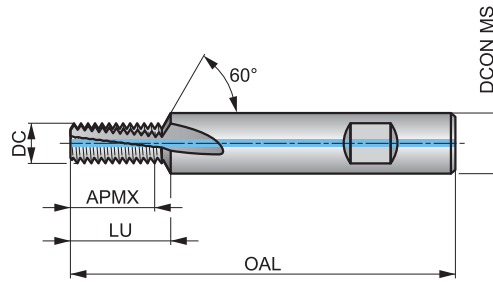


Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 172 B	<b>P1.2</b> ■ 193 B	<b>P1.3</b> ■ 200 B	<b>P2.1</b> ■ 148 B	<b>P2.2</b> ■ 130 B	<b>P2.3</b> ■ 115 B	<b>P3.1</b> ■ 133 B	<b>P3.2</b> ■ 107 B	<b>P3.3</b> ■ 90 B	<b>P4.1</b> ■ 79 B	<b>P4.2</b> ■ 67 B	<b>P4.3</b> ▣ 55 B	<b>M1.1</b> ■ 62 B	<b>M1.2</b> ■ 52 B
<b>M2.1</b> ■ 55 B	<b>M2.2</b> ■ 45 B	<b>M2.3</b> ■ 38 B	<b>M3.1</b> ■ 47 A	<b>M3.2</b> ■ 40 A	<b>M3.3</b> ■ 36 A	<b>M4.1</b> ■ 30 A	<b>M4.2</b> ▣ 26 A	<b>K1.1</b> ■ 130 B	<b>K1.2</b> ■ 96 B	<b>K1.3</b> ■ 72 B	<b>K2.1</b> ■ 123 B	<b>K2.2</b> ■ 100 B	<b>K2.3</b> ■ 80 B
<b>K3.1</b> ■ 109 B	<b>K3.2</b> ■ 83 B	<b>K3.3</b> ■ 67 B	<b>K4.1</b> ■ 101 A	<b>K4.2</b> ■ 76 A	<b>K4.3</b> ■ 56 A	<b>K4.4</b> ■ 48 A	<b>K4.5</b> ▣ 40 A	<b>K5.1</b> ■ 114 B	<b>K5.2</b> ■ 86 B	<b>K5.3</b> ■ 66 B	<b>N1.1</b> ■ 400 C	<b>N1.2</b> ■ 300 C	<b>N1.3</b> ■ 200 C
<b>N2.1</b> ■ 262 C	<b>N2.2</b> ■ 235 C	<b>N2.3</b> ■ 170 C	<b>N3.1</b> ■ 610 C	<b>N3.2</b> ■ 360 C	<b>N3.3</b> ■ 180 C	<b>N4.1</b> ■ 290 C	<b>N4.2</b> ■ 145 C	<b>N4.3</b> ■ 65 C	<b>S1.1</b> ■ 40 A	<b>S1.2</b> ■ 40 A	<b>S1.3</b> ▣ 30 A	<b>S2.1</b> ■ 33 A	<b>S2.2</b> ▣ 25 A
<b>S3.1</b> ■ 25 A	<b>S3.2</b> ▣ 21 A	<b>S4.1</b> ■ 20 A	<b>S4.2</b> ▣ 16 A	<b>H1.1</b> ▣ 60 A									

Internal Thread.


Product	TDZ	TP	DC	APMX	OAL	DCON MS	NOF	LU
		(mm)	(mm)	(mm)	(mm)	(mm)		(mm)
J2056.5X1.25	M8	1.25	6.50	17.50	72.0	10.00	3	19.10
J2058.2X1.50	M10	1.50	8.20	21.00	83.0	12.00	3	22.80
J2059.9X1.75	M12	1.75	9.90	26.25	83.0	14.00	4	28.20
J20511.6X2.0	M14	2.00	11.60	30.00	92.0	16.00	4	32.20
J20513.6X2.0	M16	2.00	13.60	34.00	92.0	18.00	4	36.20

# J210



## Solid Carbide Thread Mill with High Helix, Metric

Universal high performance tool to machine same or bigger diameters than the TDZ with the same pitch. Left or right-hand, through or blind holes almost down to the bottom. Alcrona Pro coated for the best machining result in a wide range of materials and 27° helix for a smoother cutting action.

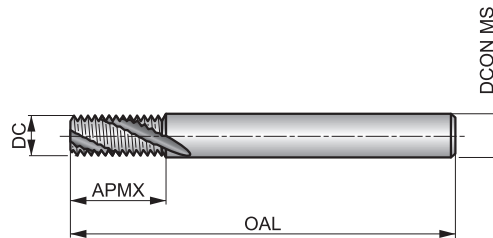

		2xD
HM		λ 27°
	Alcrona Pro	DIN 6535HA

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 181 B	<b>P1.2</b> ■ 203 B	<b>P1.3</b> ■ 210 B	<b>P2.1</b> ■ 156 B	<b>P2.2</b> ■ 137 B	<b>P2.3</b> ■ 121 B	<b>P3.1</b> ■ 140 B	<b>P3.2</b> ■ 112 B	<b>P3.3</b> ■ 95 B	<b>P4.1</b> ■ 83 B	<b>P4.2</b> ■ 70 B	<b>P4.3</b> ▣ 58 B	<b>M1.1</b> ■ 65 B	<b>M1.2</b> ■ 55 B
<b>M2.1</b> ■ 58 B	<b>M2.2</b> ■ 47 B	<b>M2.3</b> ▣ 40 B	<b>M3.1</b> ■ 50 A	<b>M3.2</b> ■ 42 A	<b>M3.3</b> ▣ 38 A	<b>M4.1</b> ■ 32 A	<b>M4.2</b> ▣ 27 A	<b>K1.1</b> ■ 137 B	<b>K1.2</b> ■ 101 B	<b>K1.3</b> ■ 76 B	<b>K2.1</b> ■ 129 B	<b>K2.2</b> ■ 105 B	<b>K2.3</b> ■ 84 B
<b>K3.1</b> ■ 115 B	<b>K3.2</b> ■ 87 B	<b>K3.3</b> ■ 71 B	<b>K4.1</b> ■ 106 A	<b>K4.2</b> ■ 80 A	<b>K4.3</b> ■ 59 A	<b>K4.4</b> ■ 51 A	<b>K4.5</b> ▣ 42 A	<b>K5.1</b> ■ 120 B	<b>K5.2</b> ■ 90 B	<b>K5.3</b> ■ 70 B	<b>N1.1</b> ■ 420 C	<b>N1.2</b> ■ 315 C	<b>N1.3</b> ■ 210 C
<b>N2.1</b> ■ 275 C	<b>N2.2</b> ■ 247 C	<b>N2.3</b> ■ 179 C	<b>N3.1</b> ■ 640 C	<b>N3.2</b> ■ 378 C	<b>N3.3</b> ■ 189 C	<b>N4.1</b> ■ 305 C	<b>N4.2</b> ■ 153 C	<b>N4.3</b> ■ 69 C	<b>S1.1</b> ■ 42 A	<b>S1.2</b> ▣ 42 A	<b>S1.3</b> ▣ 32 A	<b>S2.1</b> ▣ 35 A	<b>S2.2</b> ▣ 26 A
<b>S3.1</b> ▣ 26 A	<b>S3.2</b> ▣ 22 A	<b>S4.1</b> ▣ 21 A	<b>S4.2</b> ▣ 17 A	<b>H1.1</b> ■ 63 A	<b>H3.1</b> ▣ 45 A								

Internal Thread.


Product	TDZ	TP	DC	APMX	OAL	DCON MS	NOF
J2104.5X1.0	M6	1.00	4.50	13.00	57.0	6.00	3
J2106.0X1.25	M8	1.25	6.00	17.50	65.0	6.00	3
J2107.5X1.5	M10	1.50	7.50	21.00	72.0	8.00	3
J2109.5X1.75	M12	1.75	9.50	26.25	80.0	10.00	3
J21010.0X2.0	M14	2.00	10.00	30.00	83.0	10.00	4
J21012.0X2.0	M16	2.00	12.00	34.00	92.0	12.00	4

# J215



## Solid Carbide Thread Mill with High Helix and Through Coolant, Metric

Universal high performance tool to machine same or bigger diameters than the TDZ with the same pitch. Left or right-hand, through or blind holes almost down to the bottom. Alcrona Pro coated for the best machining result with through coolant for better chip evacuation and 27° helix for a smoother cutting action.

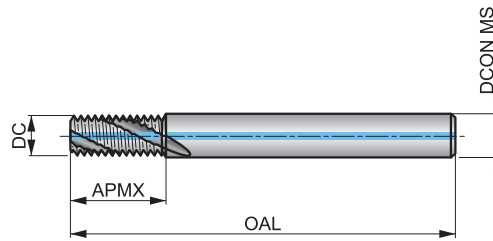

		2xD
HM		λ 27°
	Alcrona Pro	DIN 6535HA

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 181 B	<b>P1.2</b> ■ 203 B	<b>P1.3</b> ■ 210 B	<b>P2.1</b> ■ 156 B	<b>P2.2</b> ■ 137 B	<b>P2.3</b> ■ 121 B	<b>P3.1</b> ■ 140 B	<b>P3.2</b> ■ 112 B	<b>P3.3</b> ■ 95 B	<b>P4.1</b> ■ 83 B	<b>P4.2</b> ■ 70 B	<b>P4.3</b> ■ 58 B	<b>M1.1</b> ■ 65 B	<b>M1.2</b> ■ 55 B
<b>M2.1</b> ■ 58 B	<b>M2.2</b> ■ 47 B	<b>M2.3</b> ■ 40 B	<b>M3.1</b> ■ 50 A	<b>M3.2</b> ■ 42 A	<b>M3.3</b> ■ 38 A	<b>M4.1</b> ■ 32 A	<b>M4.2</b> □ 27 A	<b>K1.1</b> ■ 137 B	<b>K1.2</b> ■ 101 B	<b>K1.3</b> ■ 76 B	<b>K2.1</b> ■ 129 B	<b>K2.2</b> ■ 105 B	<b>K2.3</b> ■ 84 B
<b>K3.1</b> ■ 115 B	<b>K3.2</b> ■ 87 B	<b>K3.3</b> ■ 71 B	<b>K4.1</b> ■ 106 A	<b>K4.2</b> ■ 80 A	<b>K4.3</b> ■ 59 A	<b>K4.4</b> ■ 51 A	<b>K4.5</b> ■ 42 A	<b>K5.1</b> ■ 120 B	<b>K5.2</b> ■ 90 B	<b>K5.3</b> ■ 70 B	<b>N1.1</b> ■ 420 C	<b>N1.2</b> ■ 315 C	<b>N1.3</b> ■ 210 C
<b>N2.1</b> ■ 275 C	<b>N2.2</b> ■ 247 C	<b>N2.3</b> ■ 179 C	<b>N3.1</b> ■ 640 C	<b>N3.2</b> ■ 378 C	<b>N3.3</b> ■ 189 C	<b>N4.1</b> ■ 305 C	<b>N4.2</b> ■ 153 C	<b>N4.3</b> ■ 69 C	<b>S1.1</b> ■ 42 A	<b>S1.2</b> ■ 42 A	<b>S1.3</b> □ 32 A	<b>S2.1</b> ■ 35 A	<b>S2.2</b> □ 26 A
<b>S3.1</b> ■ 26 A	<b>S3.2</b> □ 22 A	<b>S4.1</b> ■ 21 A	<b>S4.2</b> □ 17 A	<b>H1.1</b> ■ 63 A	<b>H3.1</b> □ 45 A								

Internal Thread.


Product	TDZ	TP	DC	APMX	OAL	DCON MS	NOF
J2154.5X1.0	M6	1.00	4.50	13.00	57.0	6.00	3
J2156.0X1.25	M8	1.25	6.00	17.50	65.0	6.00	3
J2157.5X1.5	M10	1.50	7.50	21.00	72.0	8.00	3
J2159.5X1.75	M12	1.75	9.50	26.25	80.0	10.00	3
J21510.0X2.0	M14	2.00	10.00	30.00	83.0	10.00	4
J21512.0X2.0	M16	2.00	12.00	34.00	92.0	12.00	4

# J220



## Solid Carbide Thread Mill, Metric Fine

Universal high performance tool to machine same or bigger diameters than the TDZ with the same pitch. Left or right-hand, through or blind holes almost down to the bottom. Alcrona Pro coated for the best machining result in a wide range of materials.

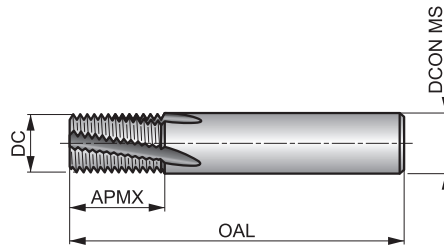

		1.5×D
HM		$\lambda$ 10°

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 190 E	<b>P1.2</b> ■ 212 E	<b>P1.3</b> ■ 242 E	<b>P2.1</b> ■ 163 E	<b>P2.2</b> ■ 143 E	<b>P2.3</b> ■ 127 E	<b>P3.1</b> ■ 146 E	<b>P3.2</b> ■ 118 E	<b>P3.3</b> ■ 99 E	<b>P4.1</b> ■ 87 E	<b>P4.2</b> ■ 74 E	<b>P4.3</b> ■ 61 E	<b>M1.1</b> ■ 69 E	<b>M1.2</b> ■ 58 E
<b>M2.1</b> ■ 61 E	<b>M2.2</b> ■ 50 E	<b>M2.3</b> ▣ 42 E	<b>M3.1</b> ■ 52 D	<b>M3.2</b> ■ 44 D	<b>M3.3</b> ▣ 40 D	<b>M4.1</b> ■ 33 D	<b>M4.2</b> ▣ 29 D	<b>K1.1</b> ■ 143 E	<b>K1.2</b> ■ 106 E	<b>K1.3</b> ■ 80 E	<b>K2.1</b> ■ 136 E	<b>K2.2</b> ■ 110 E	<b>K2.3</b> ■ 88 E
<b>K3.1</b> ■ 120 E	<b>K3.2</b> ■ 91 E	<b>K3.3</b> ■ 74 E	<b>K4.1</b> ■ 111 D	<b>K4.2</b> ■ 84 D	<b>K4.3</b> ■ 62 D	<b>K4.4</b> ■ 53 D	<b>K4.5</b> ▣ 44 D	<b>K5.1</b> ■ 126 E	<b>K5.2</b> ■ 95 E	<b>K5.3</b> ■ 73 E	<b>N1.1</b> ■ 440 F	<b>N1.2</b> ■ 330 F	<b>N1.3</b> ■ 220 F
<b>N2.1</b> ■ 288 F	<b>N2.2</b> ■ 259 F	<b>N2.3</b> ■ 187 F	<b>N3.1</b> ■ 671 F	<b>N3.2</b> ■ 396 F	<b>N3.3</b> ■ 198 F	<b>N4.1</b> ■ 319 F	<b>N4.2</b> ■ 160 F	<b>N4.3</b> ■ 72 F	<b>S1.1</b> ■ 44 D	<b>S1.2</b> ▣ 44 D	<b>S1.3</b> ▣ 33 D	<b>S2.1</b> ▣ 36 D	<b>S2.2</b> ▣ 28 D
<b>S3.1</b> ▣ 28 D	<b>S3.2</b> ▣ 23 D	<b>S4.1</b> ▣ 22 D	<b>S4.2</b> ▣ 18 D	<b>H1.1</b> ■ 66 D	<b>H3.1</b> ▣ 48 D								

Internal Thread.


Product	TDZ	TP	DC	APMX	OAL	DCON MS	NOF
J2204.8X.5	M6	0.50	4.80	10.00	57.0	6.00	3
J2206.0X.75	M8	0.75	6.00	12.00	57.0	6.00	3
J2206.0X1.0	M8	1.00	6.00	12.00	57.0	6.00	3
J2208.0X1.0	M10	1.00	8.00	16.00	63.0	8.00	4
J22010.0X1.0	M12	1.00	10.00	20.00	72.0	10.00	4
J22010.0X1.5	M12	1.50	10.00	20.00	72.0	10.00	4
J22012.0X1.0	M14	1.00	12.00	22.00	83.0	12.00	4
J22012.0X1.5	M14	1.50	12.00	22.00	83.0	12.00	4
J22014.0X1.0	M16	1.00	14.00	26.00	83.0	14.00	5
J22014.0X1.5	M16	1.50	14.00	26.00	83.0	14.00	5
J22016.0X2.0	M20	2.00	16.00	30.00	92.0	16.00	5
J22016.0X2.5	M20	2.50	16.00	42.50	105.0	16.00	5
J22019.0X3.0	M24	3.00	19.00	50.00	125.0	20.00	5
J22020.0X2.0	M24	2.00	20.00	35.00	104.0	20.00	5

# J225



## Solid Carbide Thread Mill with Through Coolant, Metric Fine

Universal high performance tool to machine same or bigger diameters than the TDZ with the same pitch. Left or right-hand, through or blind holes almost down to the bottom. Alcrona Pro coated for the best machining result and through coolant for better chip evacuation.

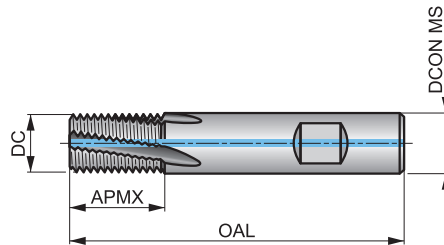

		1.5xD
HM		$\lambda$ 10°
	Alcrona Pro	DIN 6535HB

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 190 E	<b>P1.2</b> ■ 212 E	<b>P1.3</b> ■ 242 E	<b>P2.1</b> ■ 163 E	<b>P2.2</b> ■ 143 E	<b>P2.3</b> ■ 127 E	<b>P3.1</b> ■ 146 E	<b>P3.2</b> ■ 118 E	<b>P3.3</b> ■ 99 E	<b>P4.1</b> ■ 87 E	<b>P4.2</b> ■ 74 E	<b>P4.3</b> ■ 61 E	<b>M1.1</b> ■ 69 E	<b>M1.2</b> ■ 58 E
<b>M2.1</b> ■ 61 E	<b>M2.2</b> ■ 50 E	<b>M2.3</b> ■ 42 E	<b>M3.1</b> ■ 52 D	<b>M3.2</b> ■ 44 D	<b>M3.3</b> ■ 40 D	<b>M4.1</b> ■ 33 D	<b>M4.2</b> ▣ 29 D	<b>K1.1</b> ■ 143 E	<b>K1.2</b> ■ 106 E	<b>K1.3</b> ■ 80 E	<b>K2.1</b> ■ 136 E	<b>K2.2</b> ■ 110 E	<b>K2.3</b> ■ 88 E
<b>K3.1</b> ■ 120 E	<b>K3.2</b> ■ 91 E	<b>K3.3</b> ■ 74 E	<b>K4.1</b> ■ 111 D	<b>K4.2</b> ■ 84 D	<b>K4.3</b> ■ 62 D	<b>K4.4</b> ■ 53 D	<b>K4.5</b> ■ 44 D	<b>K5.1</b> ■ 126 E	<b>K5.2</b> ■ 95 E	<b>K5.3</b> ■ 73 E	<b>N1.1</b> ■ 440 F	<b>N1.2</b> ■ 330 F	<b>N1.3</b> ■ 220 F
<b>N2.1</b> ■ 288 F	<b>N2.2</b> ■ 259 F	<b>N2.3</b> ■ 187 F	<b>N3.1</b> ■ 671 F	<b>N3.2</b> ■ 396 F	<b>N3.3</b> ■ 198 F	<b>N4.1</b> ■ 319 F	<b>N4.2</b> ■ 160 F	<b>N4.3</b> ■ 72 F	<b>S1.1</b> ■ 44 D	<b>S1.2</b> ■ 44 D	<b>S1.3</b> ▣ 33 D	<b>S2.1</b> ■ 36 D	<b>S2.2</b> ▣ 28 D
<b>S3.1</b> ■ 28 D	<b>S3.2</b> ▣ 23 D	<b>S4.1</b> ■ 22 D	<b>S4.2</b> ▣ 18 D	<b>H1.1</b> ■ 66 D	<b>H3.1</b> ▣ 48 D								

Internal Thread.


Product	TDZ	TP	DC	APMX	OAL	DCON MS	NOF
J22510.0X1.5	M12	1.50	10.00	20.00	72.0	10.00	4
J22512.0X1.0	M14	1.00	12.00	22.00	83.0	12.00	4
J22514.0X1.5	M16	1.50	14.00	26.00	83.0	14.00	5
J22516.0X1.5	M18	1.50	16.00	30.00	92.0	16.00	5

# J235



## Solid Carbide Thread Mill with Through Coolant, UNC

Universal high performance tool to machine same or bigger diameters than the TDZ with the same pitch. Left or right-hand, through or blind holes almost down to the bottom. Alcrona Pro coated for the best machining result and through coolant for better chip evacuation.

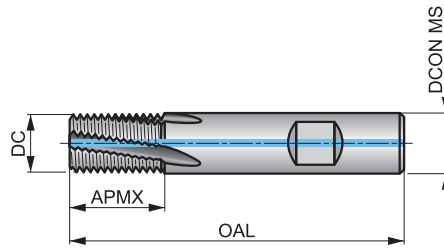


Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 181 H	<b>P1.2</b> ■ 203 H	<b>P1.3</b> ■ 210 H	<b>P2.1</b> ■ 156 H	<b>P2.2</b> ■ 137 H	<b>P2.3</b> ■ 121 H	<b>P3.1</b> ■ 140 H	<b>P3.2</b> ■ 112 H	<b>P3.3</b> ■ 95 H	<b>P4.1</b> ■ 83 H	<b>P4.2</b> ■ 70 H	<b>P4.3</b> ■ 58 H	<b>M1.1</b> ■ 65 H	<b>M1.2</b> ■ 55 H
<b>M2.1</b> ■ 58 H	<b>M2.2</b> ■ 47 H	<b>M2.3</b> ■ 40 H	<b>M3.1</b> ■ 50 G	<b>M3.2</b> ■ 42 G	<b>M3.3</b> ■ 38 G	<b>M4.1</b> ■ 32 G	<b>M4.2</b> ▣ 27 G	<b>K1.1</b> ■ 137 H	<b>K1.2</b> ■ 101 H	<b>K1.3</b> ■ 76 H	<b>K2.1</b> ■ 129 H	<b>K2.2</b> ■ 105 H	<b>K2.3</b> ■ 84 H
<b>K3.1</b> ■ 115 H	<b>K3.2</b> ■ 87 H	<b>K3.3</b> ■ 71 H	<b>K4.1</b> ■ 106 G	<b>K4.2</b> ■ 80 G	<b>K4.3</b> ■ 59 G	<b>K4.4</b> ■ 51 G	<b>K4.5</b> ■ 42 G	<b>K5.1</b> ■ 120 H	<b>K5.2</b> ■ 90 H	<b>K5.3</b> ■ 70 H	<b>N1.1</b> ■ 420 I	<b>N1.2</b> ■ 315 I	<b>N1.3</b> ■ 210 I
<b>N2.1</b> ■ 275 I	<b>N2.2</b> ■ 247 I	<b>N2.3</b> ■ 179 I	<b>N3.1</b> ■ 640 I	<b>N3.2</b> ■ 378 I	<b>N3.3</b> ■ 189 I	<b>N4.1</b> ■ 305 I	<b>N4.2</b> ■ 153 I	<b>N4.3</b> ■ 69 I	<b>S1.1</b> ■ 42 G	<b>S1.2</b> ■ 42 G	<b>S1.3</b> ▣ 32 G	<b>S2.1</b> ■ 35 G	<b>S2.2</b> ▣ 26 G
<b>S3.1</b> ■ 26 G	<b>S3.2</b> ▣ 22 G	<b>S4.1</b> ■ 21 G	<b>S4.2</b> ▣ 17 G	<b>H1.1</b> ■ 63 G	<b>H3.1</b> ▣ 45 G								

Internal Thread.


Product	TDZ	TPI	DC	APMX	OAL	DCON MS	NOF
			(mm)	(mm)	(mm)	(mm)	
J2354.8-20	1/4	20	4.80	14.00	57.0	6.00	3
J2355.5-18	5/16	18	5.50	14.00	57.0	6.00	3
J2357.5-16	3/8	16	7.50	19.00	63.0	8.00	4
J2358.0-14	7/16	14	8.00	19.00	63.0	8.00	4
J23510.0-13	1/2	13	10.00	22.00	72.0	10.00	4
J23510.0-12	9/16	12	10.00	22.00	72.0	10.00	4
J23512.0-11	5/8	11	12.00	26.00	83.0	12.00	4
J23514.0-10	3/4	10	14.00	32.00	83.0	14.00	5

# J245



## Solid Carbide Thread Mill with Through Coolant, UNF

Universal high performance tool to machine same or bigger diameters than the TDZ with the same pitch. Left or right-hand, through or blind holes almost down to the bottom. Alcrona Pro coated for the best machining result and through coolant for better chip evacuation.

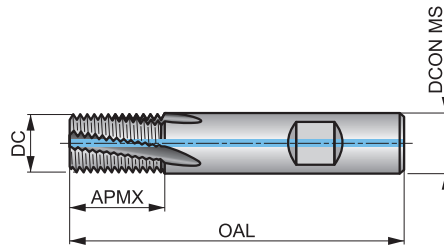


Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 181 K	<b>P1.2</b> ■ 203 K	<b>P1.3</b> ■ 210 K	<b>P2.1</b> ■ 156 K	<b>P2.2</b> ■ 137 K	<b>P2.3</b> ■ 121 K	<b>P3.1</b> ■ 140 K	<b>P3.2</b> ■ 112 K	<b>P3.3</b> ■ 95 K	<b>P4.1</b> ■ 83 K	<b>P4.2</b> ■ 70 K	<b>P4.3</b> ■ 58 K	<b>M1.1</b> ■ 65 K	<b>M1.2</b> ■ 55 K
<b>M2.1</b> ■ 58 K	<b>M2.2</b> ■ 47 K	<b>M2.3</b> ■ 40 K	<b>M3.1</b> ■ 50 J	<b>M3.2</b> ■ 42 J	<b>M3.3</b> ■ 38 J	<b>M4.1</b> ■ 32 J	<b>M4.2</b> ▣ 27 J	<b>K1.1</b> ■ 137 K	<b>K1.2</b> ■ 101 K	<b>K1.3</b> ■ 76 K	<b>K2.1</b> ■ 129 K	<b>K2.2</b> ■ 105 K	<b>K2.3</b> ■ 84 K
<b>K3.1</b> ■ 115 K	<b>K3.2</b> ■ 87 K	<b>K3.3</b> ■ 71 K	<b>K4.1</b> ■ 106 J	<b>K4.2</b> ■ 80 J	<b>K4.3</b> ■ 59 J	<b>K4.4</b> ■ 51 J	<b>K4.5</b> ■ 42 J	<b>K5.1</b> ■ 120 K	<b>K5.2</b> ■ 90 K	<b>K5.3</b> ■ 70 K	<b>N1.1</b> ■ 420 L	<b>N1.2</b> ■ 315 L	<b>N1.3</b> ■ 210 L
<b>N2.1</b> ■ 275 L	<b>N2.2</b> ■ 247 L	<b>N2.3</b> ■ 179 L	<b>N3.1</b> ■ 640 L	<b>N3.2</b> ■ 378 L	<b>N3.3</b> ■ 189 L	<b>N4.1</b> ■ 305 L	<b>N4.2</b> ■ 153 L	<b>N4.3</b> ■ 69 L	<b>S1.1</b> ■ 42 J	<b>S1.2</b> ■ 42 J	<b>S1.3</b> ▣ 32 J	<b>S2.1</b> ■ 35 J	<b>S2.2</b> ▣ 26 J
<b>S3.1</b> ■ 26 J	<b>S3.2</b> ▣ 22 J	<b>S4.1</b> ■ 21 J	<b>S4.2</b> ▣ 17 J	<b>H1.1</b> ■ 63 J	<b>H3.1</b> ▣ 45 J								

Internal Thread.


Product	TDZ	TPI	DC	APMX	OAL	DCON MS	NOF
			(mm)	(mm)	(mm)	(mm)	
J2454.8-28	1/4	28	4.80	14.00	57.0	6.00	3
J2456.0-24	5/16, 3/8	24	6.00	14.00	57.0	6.00	3
J2458.0-20	7/16, 1/2	20	8.00	19.00	63.0	8.00	4
J24510.0-18	9/16, 5/8	18	10.00	22.00	72.0	10.00	4
J24514.0-16	3/4	16	14.00	32.00	83.0	14.00	5

# J260



## Solid Carbide Thread Mill, NPT

Universal high performance tool to machine same or bigger diameters than the TDZ with the same pitch. Left or right-hand, through or blind holes almost down to the bottom. Alcrona Pro coated for the best machining result in a wide range of materials.

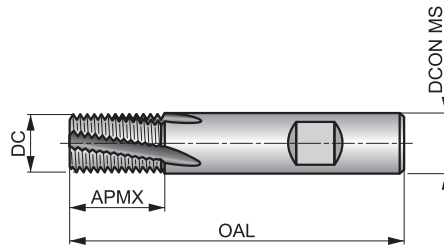


Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 190 R	<b>P1.2</b> ■ 212 R	<b>P1.3</b> ■ 242 R	<b>P2.1</b> ■ 163 R	<b>P2.2</b> ■ 143 R	<b>P2.3</b> ■ 127 R	<b>P3.1</b> ■ 146 R	<b>P3.2</b> ■ 118 R	<b>P3.3</b> ■ 99 R	<b>P4.1</b> ■ 87 R	<b>P4.2</b> ■ 74 R	<b>P4.3</b> ■ 61 R	<b>M1.1</b> ■ 69 R	<b>M1.2</b> ■ 58 R
<b>M2.1</b> ■ 61 R	<b>M2.2</b> ■ 50 R	<b>M2.3</b> ■ 42 R	<b>M3.1</b> ■ 52 Q	<b>M3.2</b> ■ 44 Q	<b>M3.3</b> ■ 40 Q	<b>M4.1</b> ■ 33 Q	<b>M4.2</b> ▣ 29 Q	<b>K1.1</b> ■ 143 R	<b>K1.2</b> ■ 106 R	<b>K1.3</b> ■ 80 R	<b>K2.1</b> ■ 136 R	<b>K2.2</b> ■ 110 R	<b>K2.3</b> ■ 88 R
<b>K3.1</b> ■ 120 R	<b>K3.2</b> ■ 91 R	<b>K3.3</b> ■ 74 R	<b>K4.1</b> ■ 111 Q	<b>K4.2</b> ■ 84 Q	<b>K4.3</b> ■ 62 Q	<b>K4.4</b> ■ 53 Q	<b>K4.5</b> ■ 44 Q	<b>K5.1</b> ■ 126 R	<b>K5.2</b> ■ 95 R	<b>K5.3</b> ■ 73 R	<b>N1.1</b> ■ 440 S	<b>N1.2</b> ■ 330 S	<b>N1.3</b> ■ 220 S
<b>N2.1</b> ■ 288 S	<b>N2.2</b> ■ 259 S	<b>N2.3</b> ■ 187 S	<b>N3.1</b> ■ 671 S	<b>N3.2</b> ■ 396 S	<b>N3.3</b> ■ 198 S	<b>N4.1</b> ■ 319 S	<b>N4.2</b> ■ 160 S	<b>N4.3</b> ■ 72 S	<b>S1.1</b> ■ 44 Q	<b>S1.2</b> ■ 44 Q	<b>S1.3</b> ▣ 33 Q	<b>S2.1</b> ■ 36 Q	<b>S2.2</b> ▣ 28 Q
<b>S3.1</b> ■ 28 Q	<b>S3.2</b> ▣ 23 Q	<b>S4.1</b> ■ 22 Q	<b>S4.2</b> ▣ 18 Q	<b>H1.1</b> ■ 66 Q	<b>H3.1</b> ▣ 48 Q								

Internal Thread.


Product	TDZ	TPI	DC	APMX	OAL	DCON MS	NOF
			(mm)	(mm)	(mm)	(mm)	
J2607.9-27	1/8	27	7.90	11.50	58.0	8.00	3
J2609.9-18	1/4, 3/8	18	9.90	15.92	66.0	10.00	3
J26015.9-14	1/2, 3/4	14	15.90	20.46	82.0	16.00	4
J26019.9-11.5	1", 2"	11.5	19.90	27.12	92.0	20.00	5

# J280



## Solid Carbide Thread Mill, G(BSP)

Universal high performance tool to machine same or bigger diameters than the TDZ with the same pitch. Left or right-hand, through or blind holes almost down to the bottom. Alcrona Pro coated for the best machining result in a wide range of materials. Suited for producing internal and external threads.

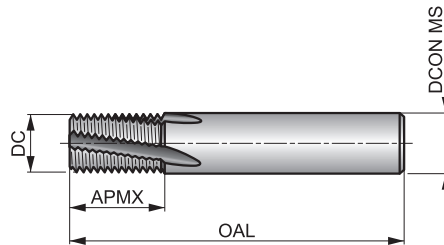

		1.5×D
HM		$\lambda$ 10°
	Alcrona Pro	DIN 6535HA

Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

<b>P1.1</b> ■ 190 N	<b>P1.2</b> ■ 212 N	<b>P1.3</b> ■ 242 N	<b>P2.1</b> ■ 163 N	<b>P2.2</b> ■ 143 N	<b>P2.3</b> ■ 127 N	<b>P3.1</b> ■ 146 N	<b>P3.2</b> ■ 118 N	<b>P3.3</b> ■ 99 N	<b>P4.1</b> ■ 87 N	<b>P4.2</b> ■ 74 N	<b>P4.3</b> ■ 61 N	<b>M1.1</b> ■ 69 N	<b>M1.2</b> ■ 58 N
<b>M2.1</b> ■ 61 N	<b>M2.2</b> ■ 50 N	<b>M2.3</b> ■ 42 N	<b>M3.1</b> ■ 52 M	<b>M3.2</b> ■ 44 M	<b>M3.3</b> ■ 40 M	<b>M4.1</b> ■ 33 M	<b>M4.2</b> ▣ 29 M	<b>K1.1</b> ■ 143 N	<b>K1.2</b> ■ 106 N	<b>K1.3</b> ■ 80 N	<b>K2.1</b> ■ 136 N	<b>K2.2</b> ■ 110 N	<b>K2.3</b> ■ 88 N
<b>K3.1</b> ■ 120 N	<b>K3.2</b> ■ 91 N	<b>K3.3</b> ■ 74 N	<b>K4.1</b> ■ 111 M	<b>K4.2</b> ■ 84 M	<b>K4.3</b> ■ 62 M	<b>K4.4</b> ■ 53 M	<b>K4.5</b> ■ 44 M	<b>K5.1</b> ■ 126 N	<b>K5.2</b> ■ 95 N	<b>K5.3</b> ■ 76 N	<b>N1.1</b> ■ 440 0	<b>N1.2</b> ■ 330 0	<b>N1.3</b> ■ 220 0
<b>N2.1</b> ■ 288 0	<b>N2.2</b> ■ 259 0	<b>N2.3</b> ■ 187 0	<b>N3.1</b> ■ 671 0	<b>N3.2</b> ■ 396 0	<b>N3.3</b> ■ 198 0	<b>N4.1</b> ■ 319 0	<b>N4.2</b> ■ 160 0	<b>N4.3</b> ■ 72 0	<b>S1.1</b> ■ 44 M	<b>S1.2</b> ■ 44 M	<b>S1.3</b> ▣ 33 M	<b>S2.1</b> ■ 36 M	<b>S2.2</b> ▣ 28 M
<b>S3.1</b> ■ 28 M	<b>S3.2</b> ▣ 23 M	<b>S4.1</b> ■ 22 M	<b>S4.2</b> ▣ 18 M	<b>H1.1</b> ■ 66 M	<b>H3.1</b> ▣ 48 M								

Internal and External Thread.

Product	TDZ	TPI	DC	APMX	OAL	DCON MS	NOF
			(mm)	(mm)	(mm)	(mm)	
J2806.0-28	1/8	28	6.00	15.00	57.0	6.00	3
J28010.0-19	1/4	19	10.00	20.00	72.0	10.00	4
J28014.0-19	3/8	19	14.00	26.00	83.0	14.00	5
J28016.0-14	1/2, 5/8	14	16.00	30.00	92.0	16.00	5
J28020.0-14	5/8, 3/4, 7/8	14	20.00	35.00	104.0	20.00	5
J28025.0-11	1", 3"	11	25.00	45.00	121.0	25.00	6



## ROTARY BURRS

---

Material code (BMC)	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM	HM
Burr Type Code (BTC)	DC	DC	DC	DC	DC	DC	DC	DC	DC	DC	DC	DC	DC
Burr Shape													
Coating	Bright	TiAlN	Bright	TiAlN	Bright	TiAlN	Bright	TiAlN	Bright	Bright	TiAlN	Bright	TiAlN
Basic standard group (BSG)													
Application angle													
Burr end shot													
Product Family Code	<b>P801</b>	<b>P801C</b>	<b>P803</b>	<b>P803C</b>	<b>P805</b>	<b>P805C</b>	<b>P807</b>	<b>P807C</b>	<b>P809</b>	<b>P811</b>	<b>P811C</b>	<b>P813</b>	<b>P813C</b>
PSF cutting diameters range	3.00 – 16.00	3.00 – 12.70	3.00 – 16.00	3.00 – 12.70	3.00 – 16.00	3.00 – 12.70	3.00 – 16.00	3.00 – 12.70	3.00 – 16.00	3.00 – 16.00	3.00 – 12.70	3.00 – 16.00	3.00 – 12.70
<b>P</b>	P1	■	■	■	■	■	■	■	■	■	■	■	■
	P2	■	■	■	■	■	■	■	■	■	■	■	■
	P3	■	■	■	■	■	■	■	■	■	■	■	■
	P4	■	■	■	■	■	■	■	■	■	■	■	■
<b>M</b>	M1	■	■	■	■	■	■	■	■	■	■	■	■
	M2	■	■	■	■	■	■	■	■	■	■	■	■
	M3	■	■	■	■	■	■	■	■	■	■	■	■
	M4	■	■	■	■	■	■	■	■	■	■	■	■
<b>K</b>	K1	■	■	■	■	■	■	■	■	■	■	■	■
	K2	■	■	■	■	■	■	■	■	■	■	■	■
	K3	■	■	■	■	■	■	■	■	■	■	■	■
	K4	■	■	■	■	■	■	■	■	■	■	■	■
	K5	■	■	■	■	■	■	■	■	■	■	■	■
<b>N</b>	N1												
	N2												
	N3	■	■	■	■	■	■	■	■	■	■	■	■
	N4												
	N5												
<b>S</b>	S1	■	■	■	■	■	■	■	■	■	■	■	■
	S2	■	■	■	■	■	■	■	■	■	■	■	■
	S3	■	■	■	■	■	■	■	■	■	■	■	■
	S4	■	■	■	■	■	■	■	■	■	■	■	■
<b>H</b>	H1	■	■	■	■	■	■	■	■	■	■	■	■
	H2	■	■	■	■	■	■	■	■	■	■	■	■
	H3	■	■	■	■	■	■	■	■	■	■	■	■
	H4	■	■	■	■	■	■	■	■	■	■	■	■

Primary use
  Possible use

ISO  
13399PMK  
NSH

	HM DC H Bright DORMER	HM DC H TiAlN DORMER	HM DC J Bright DORMER 60°	HM DC K Bright DORMER 90°	HM DC L Bright DORMER	HM DC L TiAlN DORMER	HM DC M Bright DORMER	HM DC N Bright DORMER							
	P815	P815C	P817	P819	P821	P821C	P823	P825							
	3.00 – 16.00	8.00 – 12.70	3.00 – 16.00	3.00 – 16.00	3.00 – 16.00	3.00 – 12.70	3.00 – 16.00	3.00 – 16.00							
	195	196	197	198	199	200	201	202							
P1	■	■	■	■	■	■	■	■							
P2	■	■	■	■	■	■	■	■							
P3	■	■	■	■	■	■	■	■							
P4	■	■	■	■	■	■	■	■							
M1	■	■	■	■	■	■	■	■							
M2	■	■	■	■	■	■	■	■							
M3	■	■	■	■	■	■	■	■							
M4	■	■	■	■	■	■	■	■							
K1	■	■	■	■	■	■	■	■							
K2	■	■	■	■	■	■	■	■							
K3	■	■	■	■	■	■	■	■							
K4	■	■	■	■	■	■	■	■							
K5	■	■	■	■	■	■	■	■							
N1															
N2															
N3	■	■	■	■	■	■	■	■							
N4															
N5															
S1	■	■	■	■	■	■	■	■							
S2	■	■	■	■	■	■	■	■							
S3	■	■	■	■	■	■	■	■							
S4	■	■	■	■	■	■	■	■							
H1	■	■	■	■	■	■	■	■							
H2	■	■	■	■	■	■	■	■							
H3	■	■	■	■	■	■	■	■							
H4	■	■	■	■	■	■	■	■							


■ Primary use    ▣ Possible use

# P801



## Rotary Burr – Cylinder without endcut, Shape A, Bright Finish

DC double cut flute style with close spaced edges for trimming and deburring surfaces. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank.

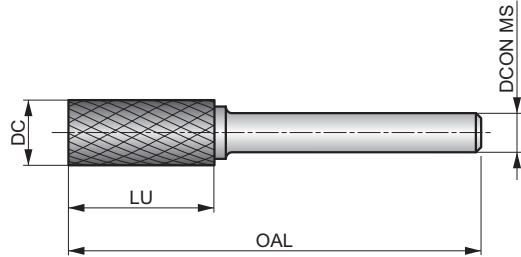

HM		Bright
DC		

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8013.0X3.0	3.00	3.00	14.00	38.0
P8016.3X3.0 <sup>1)</sup>	6.30	3.00	12.70	45.0
P8016.0X6.0	6.00	6.00	18.00	50.0
P8018.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P8019.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P80112.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0
P80116.0X6.0 <sup>1)</sup>	16.00	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P801C



## Rotary Burr – Cylinder without endcut, Shape A, TiAlN Coating

DC double cut flute style with close spaced edges for trimming and deburring surfaces. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. TiAlN coating for increased tool life, reduced friction and improved swarf evacuation.

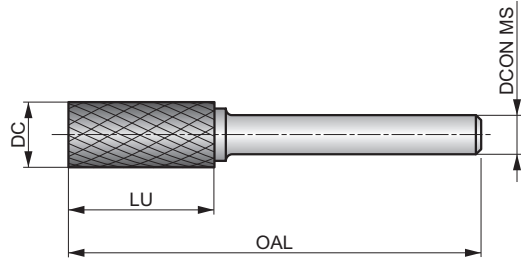

HM		
DC		

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P801C3.0X3.0	3.00	3.00	14.00	38.0
P801C6.0X6.0	6.00	6.00	18.00	50.0
P801C8.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P801C9.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P801C12.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P803



## Rotary Burr – Cylinder with endcut, Shape B, Bright Finish

DC double cut flute style with close spaced edges for trimming and deburring surfaces and right-angled corners. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank.

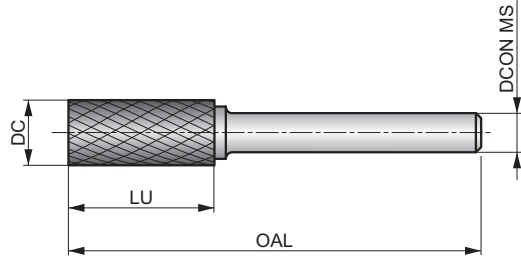

HM	B	
Bright	DC	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880 or P890.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8033.0X3.0	3.00	3.00	14.00	38.0
P8036.3X3.0 <sup>1)</sup>	6.30	3.00	12.70	45.0
P8036.0X6.0	6.00	6.00	18.00	50.0
P8038.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P8039.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P80312.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0
P80316.0X6.0 <sup>1)</sup>	16.00	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P803C



## Rotary Burr – Cylinder with endcut, Shape B, TiAlN Coating

DC double cut flute style with close spaced edges for trimming and deburring surfaces and right-angled corners. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. TiAlN coating for increased tool life, reduced friction and improved swarf evacuation.

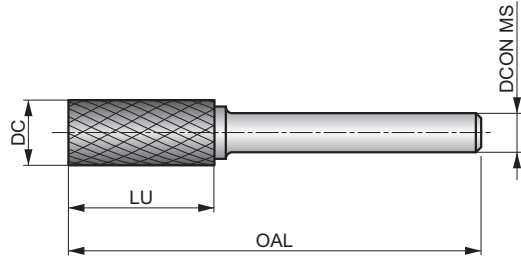

HM	B	
TiAlN	DC	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P803C3.0X3.0	3.00	3.00	14.00	38.0
P803C6.0X6.0	6.00	6.00	18.00	50.0
P803C8.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P803C9.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P803C12.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P805



## Rotary Burr – Ball Nosed Cylinder, Shape C, Bright Finish

DC double cut flute style with close spaced edges for trimming and deburring contours and circular arcs. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank.

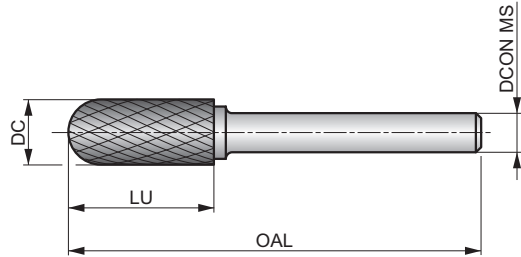

HM		Bright
DC		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880 or P890.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8053.0X3.0	3.00	3.00	14.00	38.0
P8056.3X3.0 <sup>1)</sup>	6.30	3.00	12.70	45.0
P8056.0X6.0	6.00	6.00	18.00	50.0
P8058.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P8059.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P80512.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0
P80516.0X6.0 <sup>1)</sup>	16.00	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P805C



## Rotary Burr – Ball Nosed Cylinder, Shape C, TiAlN Coating

DC double cut flute style with close spaced edges for trimming and deburring contours and circular arcs. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. TiAlN coating for increased tool life, reduced friction and improved swarf evacuation.

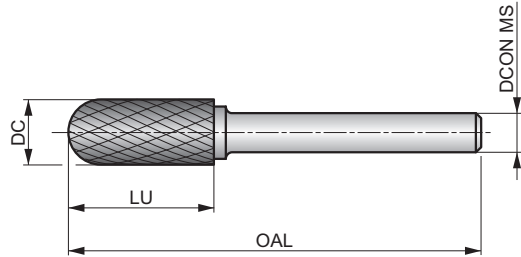

HM		
DC		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P805C3.0X3.0	3.00	3.00	14.00	38.0
P805C6.0X6.0	6.00	6.00	18.00	50.0
P805C8.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P805C9.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P805C12.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P807



## Rotary Burr – Ball, Shape D, Bright Finish

DC double cut flute style with close spaced edges for intricate carving, metal engraving and welding preparation. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank.

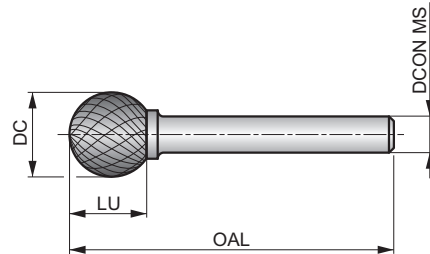

HM	Bright
DC	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8073.0X3.0	3.00	3.00	2.50	38.0
P8074.0X3.0	4.00	3.00	3.40	38.0
P8076.3X3.0 <sup>1)</sup>	6.30	3.00	5.00	38.0
P8076.0X6.0	6.00	6.00	4.70	50.0
P8078.0X6.0 <sup>1)</sup>	8.00	6.00	6.00	52.0
P8079.6X6.0 <sup>1)</sup>	9.60	6.00	8.00	54.0
P80712.7X6.0 <sup>1)</sup>	12.70	6.00	11.00	56.0
P80716.0X6.0 <sup>1)</sup>	16.00	6.00	14.00	59.0


<sup>1)</sup> Brazed on steel shank

# P807C



## Rotary Burr – Ball, Shape D, TiAlN Coating

DC double cut flute style with close spaced edges for intricate carving, metal engraving and welding preparation. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. TiAlN coating for increased tool life, reduced friction and improved swarf evacuation.

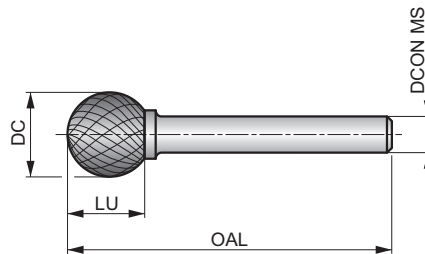

HM		
DC		

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P807C3.0X3.0	3.00	3.00	2.50	38.0
P807C6.0X6.0	6.00	6.00	4.70	50.0
P807C8.0X6.0 <sup>1)</sup>	8.00	6.00	6.00	52.0
P807C9.6X6.0 <sup>1)</sup>	9.60	6.00	8.00	54.0
P807C12.7X6.0 <sup>1)</sup>	12.70	6.00	11.00	56.0


<sup>1)</sup> Brazed on steel shank

# P809



## Rotary Burr – Oval, Shape E

DC double cut flute style with close spaced edges for round edge contouring. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughend and hardened steel shank.

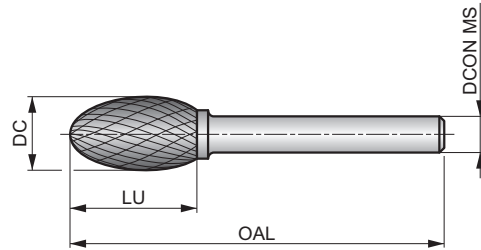

HM		Bright
DC		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8093.0X3.0	3.00	3.00	6.00	38.0
P8096.3X3.0 <sup>1)</sup>	6.30	3.00	9.50	42.0
P8096.0X6.0	6.00	6.00	10.00	50.0
P8098.0X6.0 <sup>1)</sup>	8.00	6.00	15.00	60.0
P8099.6X6.0 <sup>1)</sup>	9.60	6.00	16.00	60.0
P80912.7X6.0 <sup>1)</sup>	12.70	6.00	22.00	67.0
P80916.0X6.0 <sup>1)</sup>	16.00	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P811



## Rotary Burr – Ball Nosed Tree, Shape F, Bright Finish

DC double cut flute style with close spaced edges for multi-angle contouring, rounding of edges and cutting into hard to reach areas. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank.

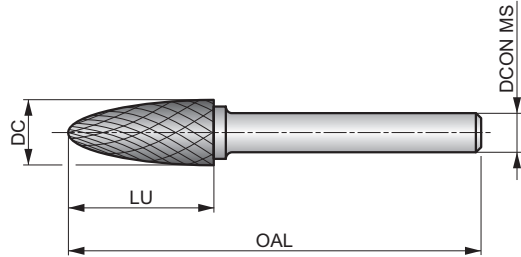

HM	F	Bright
DC		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880 or P890.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8113.0X3.0	3.00	3.00	14.00	38.0
P8116.3X3.0 <sup>1)</sup>	6.30	3.00	12.70	45.0
P8116.0X6.0	6.00	6.00	18.00	50.0
P8118.0X6.0 <sup>1)</sup>	8.00	6.00	20.00	65.0
P8119.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P81112.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0
P81116.0X6.0 <sup>1)</sup>	16.00	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P811C



## Rotary Burr – Ball Nosed Tree, Shape F, TiAlN Coating

DC double cut flute style with close spaced edges for multi-angle contouring, rounding of edges and cutting into hard to reach areas. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with tough hard steel shank. TiAlN coating for increased tool life, reduced friction and improved swarf evacuation.

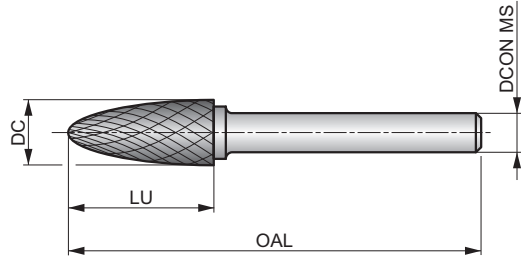

HM		
DC		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P811C3.0X3.0	3.00	3.00	14.00	38.0
P811C6.0X6.0	6.00	6.00	18.00	50.0
P811C9.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P811C12.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P813



## Rotary Burr – Pointed Tree, Shape G, Bright Finish

DC double cut flute style with close spaced edges for multi-angle contouring and cutting narrow angles in hard to reach areas. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank.

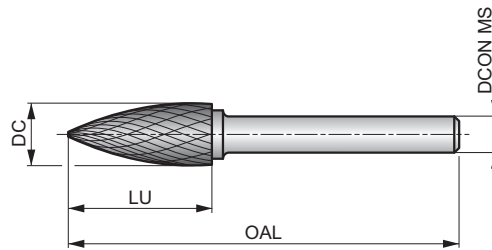

HM		Bright
DC		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880 or P890.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8133.0X3.0	3.00	3.00	14.00	38.0
P8136.3X3.0 <sup>1)</sup>	6.30	3.00	12.70	45.0
P8136.0X6.0	6.00	6.00	18.00	50.0
P8138.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P8139.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P81312.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0
P81316.0X6.0 <sup>1)</sup>	16.00	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P813C



## Rotary Burr – Pointed Tree, Shape G, TiAlN Coating

DC double cut flute style with close spaced edges for multi-angle contouring and cutting narrow angles in hard to reach areas. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with tough hard steel shank. TiAlN coating for increased tool life, reduced friction and improved swarf evacuation.

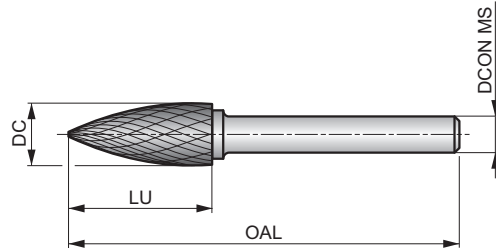

HM					
DC					

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P813C3.0X3.0	3.00	3.00	14.00	38.0
P813C6.0X6.0	6.00	6.00	18.00	50.0
P813C9.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P813C12.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P815



## Rotary Burr – Flame, Shape H, Bright Finish

DC double cut flute style with close spaced edges for round edge contouring and welding preparation. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank.

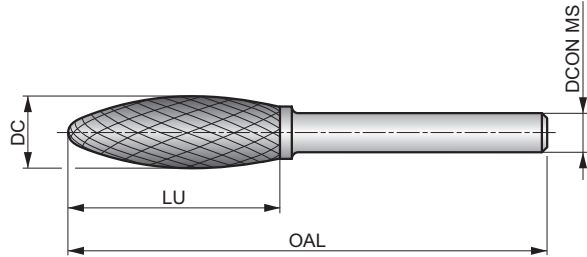

HM	H	Bright
DC		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8153.0X3.0	3.00	3.00	6.00	38.0
P8156.0X6.0	6.00	6.00	14.00	50.0
P8158.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P8159.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	65.0
P81512.7X6.0 <sup>1)</sup>	12.70	6.00	32.00	77.0
P81516.0X6.0 <sup>1)</sup>	16.00	6.00	36.00	81.0


<sup>1)</sup> Brazed on steel shank

# P815C



## Rotary Burr – Flame, Shape H, TiAlN Coating

DC double cut flute style with close spaced edges for round edge contouring and welding preparation. Carbide head with toughened and hardened steel shank. TiAlN coating for increased tool life, reduced friction and improved swarf evacuation.

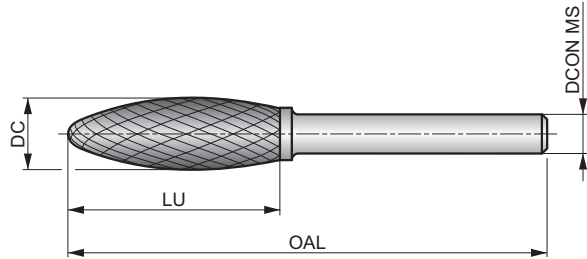

HM	H	TiAlN
DC	DORMER	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

Brazed on Steel Shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P815C8.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P815C12.7X6.0 <sup>1)</sup>	12.70	6.00	32.00	77.0


<sup>1)</sup> Brazed on steel shank

# P817



## Rotary Burr – 60° Countersink, Shape J

DC double cut flute style with close spaced edges for chamfering, making v-cuts and welding preparation. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank.

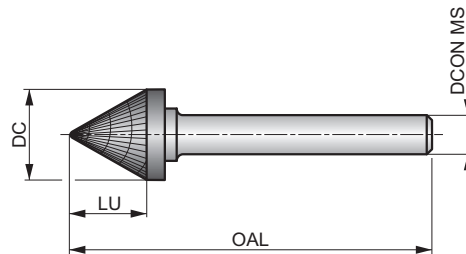

HM	J	Bright
60°	DC	DORMER



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8173.0X3.0	3.00	3.00	2.50	38.0
P8176.0X6.0	6.00	6.00	4.00	50.0
P8179.6X6.0 <sup>1)</sup>	9.60	6.00	8.00	56.0
P81712.7X6.0 <sup>1)</sup>	12.70	6.00	11.00	59.0
P81716.0X6.0 <sup>1)</sup>	16.00	6.00	14.50	63.0


<sup>1)</sup> Brazed on steel shank

# P819



## Rotary Burr – 90° Countersink, Shape K

DC double cut flute style with close spaced edges for chamfering, making v-cuts and welding preparation. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank.

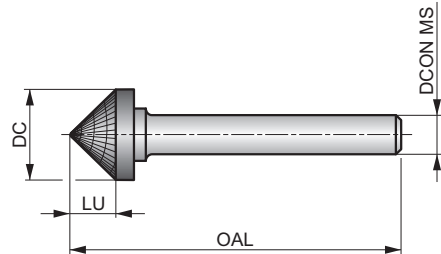

HM	K	Bright
90°	DC	DORMER



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8193.0X3.0	3.00	3.00	1.50	38.0
P8196.0X6.0	6.00	6.00	3.00	50.0
P8199.6X6.0 <sup>1)</sup>	9.60	6.00	4.70	53.0
P81912.7X6.0 <sup>1)</sup>	12.70	6.00	6.30	55.0
P81916.0X6.0 <sup>1)</sup>	16.00	6.00	8.00	57.0


<sup>1)</sup> Brazed on steel shank

# P821



## Rotary Burr – Ball Nosed Cone, Shape L, Bright Finish

DC double cut flute style with close spaced edges for enlarging holes, rounding edges and surface finishing in tight narrow angles or other hard to reach areas. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank.

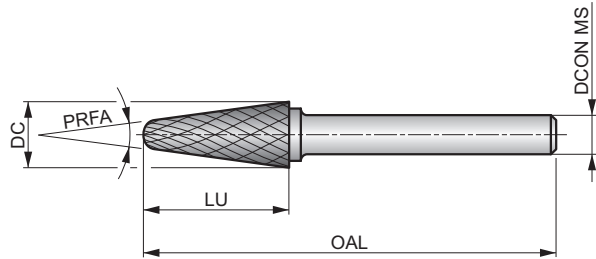

HM		Bright
DC		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880 or P890.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)	PRFA (°)
P8213.0X3.0	3.00	3.00	14.00	38.0	8
P8216.0X6.0	6.00	6.00	18.00	50.0	14
P8218.0X6.0 <sup>1)</sup>	8.00	6.00	25.40	70.0	14
P8219.6X6.0 <sup>1)</sup>	9.60	6.00	30.00	76.0	14
P82112.7X6.0 <sup>1)</sup>	12.70	6.00	32.00	77.0	14
P82116.0X6.0 <sup>1)</sup>	16.00	6.00	33.00	78.0	14


<sup>1)</sup> Brazed on steel shank

# P821C



## Rotary Burr – Ball Nosed Cone, Shape L, TiAlN Coating

DC double cut flute style with close spaced edges for enlarging holes, rounding edges and surface finishing in tight narrow angles or other hard to reach areas. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. TiAlN coating for increased tool life.

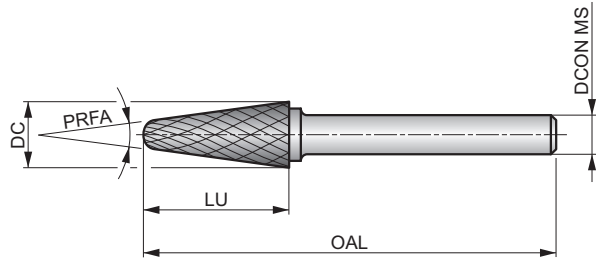

HM		
DC		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)	PRFA (°)
P821C3.0X3.0	3.00	3.00	14.00	38.0	8
P821C12.7X6.0 <sup>1)</sup>	12.70	6.00	32.00	77.0	14


<sup>1)</sup> Brazed on steel shank

# P823



## Rotary Burr – Cone, Shape M

DC double cut flute style with close spaced edges for enlarging holes, surface finishing and cutting narrow angles in hard to reach areas. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank.

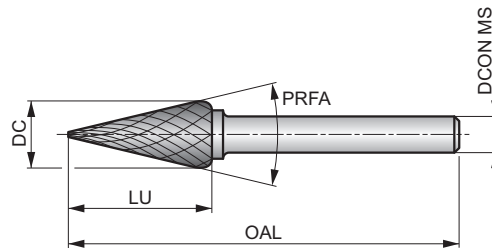

HM		Bright
DC		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)	PRFA (°)
P8233.0X3.0	3.00	3.00	11.00	38.0	14
P8236.3X3.0 <sup>1)</sup>	6.30	3.00	12.70	49.0	22
P8236.0X6.0	6.00	6.00	20.00	50.0	14
P8239.6X6.0 <sup>1)</sup>	9.60	6.00	16.00	64.0	28
P82312.7X6.0 <sup>1)</sup>	12.70	6.00	22.00	71.0	28
P82316.0X6.0 <sup>1)</sup>	16.00	6.00	25.00	71.0	31


<sup>1)</sup> Brazed on steel shank

# P825



## Rotary Burr – Inverted Cone, Shape N

DC double cut flute style with close spaced edges for making inverted v-cuts and rear side chamfering. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank.

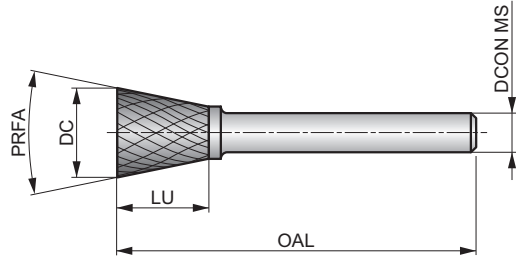

HM		Bright
DC		

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3	M1.1	M1.2
M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3
K3.1	K3.2	K3.3	K4.1	K4.2	K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	N3.1	N3.2	N3.3
S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2	H1.1	H2.1	H2.2	H3.1	H3.2
H4.1	H4.2												

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)	PRFA (°)
P8253.0X3.0	3.00	3.00	4.00	38.0	10
P8256.3X3.0 <sup>1)</sup>	6.30	3.00	6.00	39.0	12
P8256.0X6.0	6.00	6.00	8.00	50.0	10
P8259.6X6.0 <sup>1)</sup>	9.60	6.00	9.50	55.0	16
P82512.7X6.0 <sup>1)</sup>	12.70	6.00	12.70	58.0	28
P82516.0X6.0 <sup>1)</sup>	16.00	6.00	19.00	64.0	18

<sup>1)</sup> Brazed on steel shank


Material code (BMC)	HM	HM	HM	HM	HM	HM	HM	HM	HM									
Burr Type Code (BTC)	ST	ST	ST	ST	ST	ST	ST	ST	ST									
Burr Shape																		
Coating	Bright	Bright	Bright	Bright	Bright	Bright	Bright	Bright	Bright									
Basic standard group (BSG)	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER									
Burr end shot																		
Product Family Code	P701	P703	P705	P707	P709	P711	P713	P715	P721									
PSF cutting diameters range	6.00 – 12.70	6.00 – 12.70	6.00 – 12.70	6.00 – 12.70	12.70	6.00 – 12.70	6.00 – 12.70	8.00 – 12.70	9.60 – 12.70									
	204	205	206	207	208	209	210	211	212									
P	P1	■	■	■	■	■	■	■	■									
	P2	■	■	■	■	■	■	■	■									
	P3	■	■	■	■	■	■	■	■									
	P4	■	■	■	■	■	■	■	■									
M	M1																	
	M2																	
	M3																	
	M4																	
K	K1																	
	K2																	
	K3																	
	K4																	
	K5																	
N	N1																	
	N2																	
	N3																	
	N4																	
	N5																	
S	S1																	
	S2																	
	S3																	
	S4																	
H	H1																	
	H2																	
	H3																	
	H4																	

# P701



## Rotary Burr – Cylinder without endcut, Shape A

ST single cut flute style with chipbreakers and medium spaced edge for trimming and deburring surfaces. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for steels.

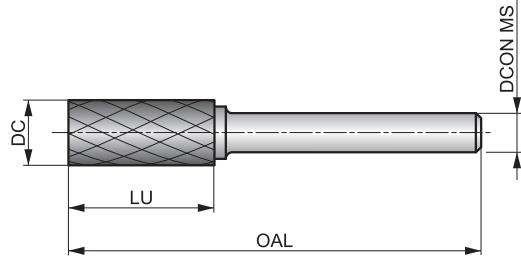

HM	A	Bright
ST		

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3
■	■	■	■	■	■	■	■	■	■	■	■

DC = 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P7016.0X6.0	6.00	6.00	18.00	50.0
P7018.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P7019.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P70112.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P703



## Rotary Burr – Cylinder with endcut, Shape B

ST single cut flute style with chipbreakers and medium spaced edge for trimming and deburring surfaces and right-angled corners. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for steels.

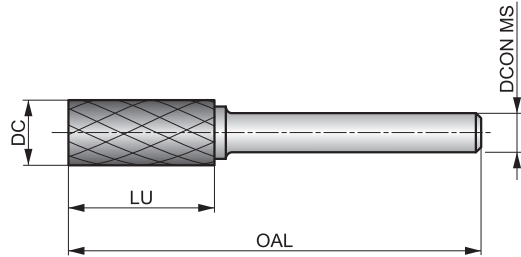

HM	B	
Bright	ST	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3
■	■	■	■	■	■	■	■	■	■	■	■

DC = 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P7036.0X6.0</b>	6.00	6.00	18.00	50.0
<b>P7038.0X6.0</b> <sup>1)</sup>	8.00	6.00	19.00	64.0
<b>P7039.6X6.0</b> <sup>1)</sup>	9.60	6.00	19.00	64.0
<b>P70312.7X6.0</b> <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P705



## Rotary Burr – Ball Nosed Cylinder, Shape C

ST single cut flute style with chipbreakers and medium spaced edge for trimming and deburring contours and circular arcs. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for steels.

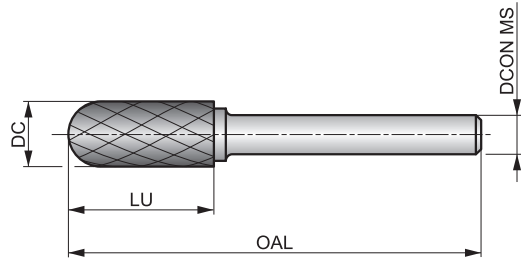

HM	
ST	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3
■	■	■	■	■	■	■	■	■	■	■	■

DC = 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P7056.0X6.0</b>	6.00	6.00	18.00	50.0
<b>P7058.0X6.0</b> <sup>1)</sup>	8.00	6.00	19.00	64.0
<b>P7059.6X6.0</b> <sup>1)</sup>	9.60	6.00	19.00	64.0
<b>P70512.7X6.0</b> <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P707



## Rotary Burr – Ball, Shape D

ST single cut flute style with chipbreakers and medium spaced edge for intricate carving, metal engraving and welding preparation. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for steels.

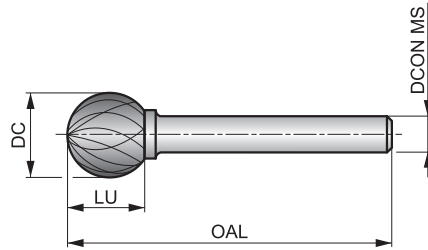

HM	Bright	
ST		

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

- P1.1
- P1.2
- P1.3
- P2.1
- P2.2
- P2.3
- P3.1
- P3.2
- P3.3
- P4.1
- P4.2
- P4.3

DC = 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P7076.0X6.0</b>	6.00	6.00	4.70	50.0
<b>P7078.0X6.0</b> <sup>1)</sup>	8.00	6.00	6.00	52.0
<b>P7079.6X6.0</b> <sup>1)</sup>	9.60	6.00	8.00	54.0
<b>P70712.7X6.0</b> <sup>1)</sup>	12.70	6.00	11.00	56.0


<sup>1)</sup> Brazed on steel shank

# P709



## Rotary Burr – Oval, Shape E

ST single cut flute style with chipbreakers and medium spaced edge for round edge contouring. Carbide head with toughened and hardened steel shank. First choice for steels.

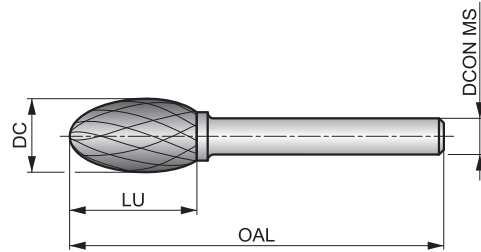

HM	E	Bright
ST	DORMER	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>P1.1</b>	<b>P1.2</b>	<b>P1.3</b>	<b>P2.1</b>	<b>P2.2</b>	<b>P2.3</b>	<b>P3.1</b>	<b>P3.2</b>	<b>P3.3</b>	<b>P4.1</b>	<b>P4.2</b>	<b>P4.3</b>
■	■	■	■	■	■	■	■	■	■	■	■

Brazed on Steel Shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P70912.7X6.0</b> <sup>1)</sup>	12.70	6.00	22.00	67.0


<sup>1)</sup> Brazed on steel shank

# P711



## Rotary Burr – Ball Nosed Tree, Shape F

ST single cut flute style with chipbreakers and medium spaced edge for multi-angle contouring, rounding of edges and cutting into hard to reach areas. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughend and hardened steel shank. First choice for steels.

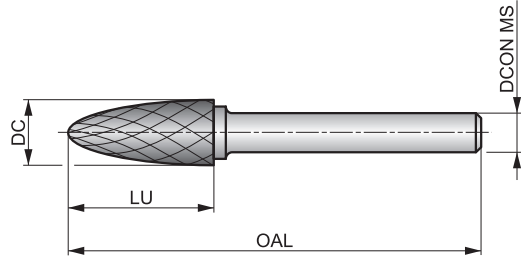

HM	F	Bright
ST		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>P1.1</b>	<b>P1.2</b>	<b>P1.3</b>	<b>P2.1</b>	<b>P2.2</b>	<b>P2.3</b>	<b>P3.1</b>	<b>P3.2</b>	<b>P3.3</b>	<b>P4.1</b>	<b>P4.2</b>	<b>P4.3</b>
■	■	■	■	■	■	■	■	■	■	■	■

DC = 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P7116.0X6.0</b>	6.00	6.00	18.00	50.0
<b>P7118.0X6.0</b> <sup>1)</sup>	8.00	6.00	20.00	65.0
<b>P7119.6X6.0</b> <sup>1)</sup>	9.60	6.00	19.00	64.0
<b>P71112.7X6.0</b> <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P713



## Rotary Burr – Pointed Tree, Shape G

ST single cut flute style with chipbreakers and medium spaced edge for multi-angle contouring and cutting narrow angles in hard to reach areas. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for steels.

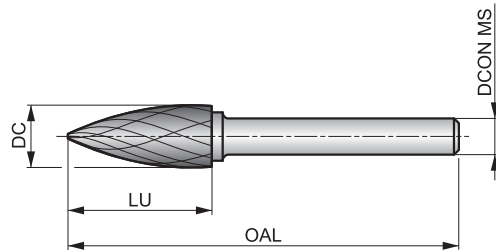

HM	
ST	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>P1.1</b>	<b>P1.2</b>	<b>P1.3</b>	<b>P2.1</b>	<b>P2.2</b>	<b>P2.3</b>	<b>P3.1</b>	<b>P3.2</b>	<b>P3.3</b>	<b>P4.1</b>	<b>P4.2</b>	<b>P4.3</b>
■	■	■	■	■	■	■	■	■	■	■	■

DC = 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P7136.0X6.0</b>	6.00	6.00	18.00	50.0
<b>P7138.0X6.0</b> <sup>1)</sup>	8.00	6.00	19.00	64.0
<b>P7139.6X6.0</b> <sup>1)</sup>	9.60	6.00	19.00	64.0
<b>P71312.7X6.0</b> <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P715



## Rotary Burr – Flame, Shape H

ST single cut flute style with chipbreakers and medium spaced edge for round edge contouring and welding preparation. Carbide head with toughened and hardened steel shank. First choice for steels.

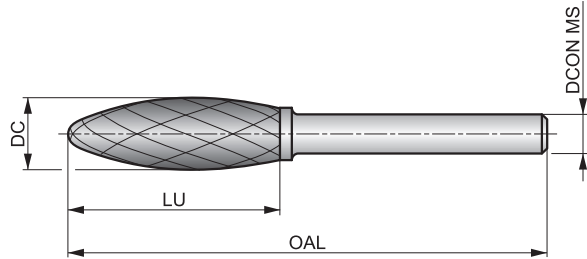

HM	H	Bright
ST		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>P1.1</b>	<b>P1.2</b>	<b>P1.3</b>	<b>P2.1</b>	<b>P2.2</b>	<b>P2.3</b>	<b>P3.1</b>	<b>P3.2</b>	<b>P3.3</b>	<b>P4.1</b>	<b>P4.2</b>	<b>P4.3</b>
■	■	■	■	■	■	■	■	■	■	■	■

Brazed on Steel Shank with DCON MS tolerance h7.

Product	DC	DCON MS	LU	OAL
	(mm)	(mm)	(mm)	(mm)
<b>P7158.0X6.0</b> <sup>1)</sup>	8.00	6.00	19.00	64.0
<b>P71512.7X6.0</b> <sup>1)</sup>	12.70	6.00	32.00	77.0


<sup>1)</sup> Brazed on steel shank

# P721



## Rotary Burr – Ball Nosed Cone, Shape L

ST single cut flute style with chipbreakers and medium spaced edge for enlarging holes, rounding edges and surface-finishing in tight narrow angles or other hard to reach areas. Carbide head with toughened and hardened steel shank. First choice for steels.

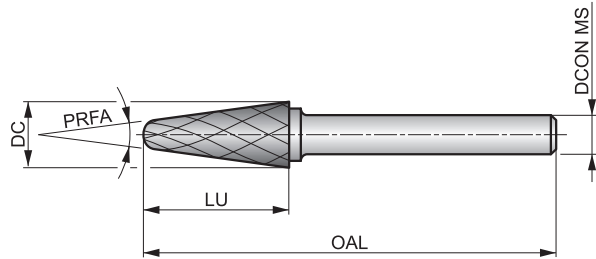

HM	
ST	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	P4.3
■	■	■	■	■	■	■	■	■	■	■	■

Brazed on Steel Shank with DCON MS tolerance h7.  
Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)	PRFA (°)
P72110.0X6.0 <sup>1)</sup>	10.00	6.00	20.00	65.0	14
P7219.6X6.0 <sup>1)</sup>	9.60	6.00	30.00	76.0	14
P72112.7X6.0 <sup>1)</sup>	12.70	6.00	32.00	77.0	14

<sup>1)</sup> Brazed on steel shank

Material code (BMC)	HM	HM	HM	HM	HM	HM	HM	HM									
Burr Type Code (BTC)	VA	VA	VA	VA	VA	VA	VA	VA									
Burr Shape																	
Coating	Bright	Bright	Bright	Bright	Bright	Bright	Bright	Bright									
Basic standard group (BSG)																	

Product Family Code	<b>P601</b>	<b>P605</b>	<b>P607</b>	<b>P609</b>	<b>P611</b>	<b>P613</b>	<b>P615</b>	<b>P621</b>									
PSF cutting diameters range	3.00 – 12.70	3.00 – 12.70	3.00 – 12.70	8.00 – 12.70	3.00 – 12.70	6.00 – 12.70	8.00 – 12.70	8.00 – 12.70									
	214	215	216	217	218	219	220	221									


<b>P</b>	P1																
	P2																
	P3																
	P4																
<b>M</b>	M1	■	■	■	■	■	■	■									
	M2	■	■	■	■	■	■	■									
	M3	■	■	■	■	■	■	■									
	M4	■	■	■	■	■	■	■									
<b>K</b>	K1								▣								
	K2																
	K3																
	K4	▣	▣	▣	▣	▣	▣	▣	▣	▣	▣	▣	▣				
	K5																
<b>N</b>	N1																
	N2																
	N3																
	N4																
	N5																
<b>S</b>	S1																
	S2																
	S3																
	S4																
<b>H</b>	H1																
	H2																
	H3																
	H4																

# P601



## Rotary Burr – Cylinder without endcut, Shape A

VA single cut flute style with medium spaced edges for trimming and deburring surfaces. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for stainless steels.

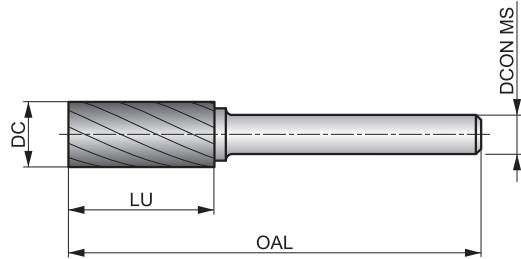

HM	A	Bright
VA		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

M1.1	M1.2	M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K4.1	K4.2
■	■	■	■	■	■	■	■	■	■	▣	▣

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P6013.0X3.0	3.00	3.00	14.00	38.0
P6016.3X3.0 <sup>1)</sup>	6.30	3.00	12.70	45.0
P6016.0X6.0	6.00	6.00	18.00	50.0
P6018.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P6019.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P60112.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P605



## Rotary Burr – Ball Nosed Cylinder, Shape C

VA single cut flute style with medium spaced edges for trimming and deburring contours and circular arcs. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for stainless steels.

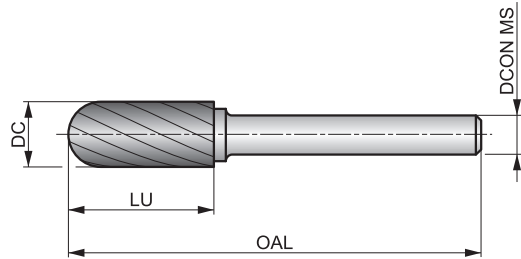

HM	C	Bright
VA		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

M1.1	M1.2	M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K4.1	K4.2
■	■	■	■	■	■	■	■	■	■	▣	▣

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P6053.0X3.0	3.00	3.00	14.00	38.0
P6056.3X3.0 <sup>1)</sup>	6.30	3.00	12.70	45.0
P6056.0X6.0	6.00	6.00	18.00	50.0
P6058.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P6059.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P60512.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P607



## Rotary Burr – Ball, Shape D

VA single cut flute style with medium spaced edges for intricate carving, metal engraving and welding preparation. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for stainless steels.

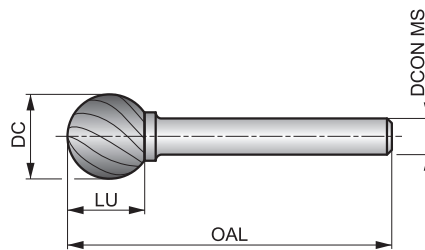

HM	D	Bright
VA		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>M1.1</b>	<b>M1.2</b>	<b>M2.1</b>	<b>M2.2</b>	<b>M2.3</b>	<b>M3.1</b>	<b>M3.2</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>K4.1</b>	<b>K4.2</b>
■	■	■	■	■	■	■	■	■	■	▣	▣

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P6073.0X3.0</b>	3.00	3.00	2.50	38.0
<b>P6076.3X3.0<sup>1)</sup></b>	6.30	3.00	5.00	38.0
<b>P6076.0X6.0</b>	6.00	6.00	4.70	50.0
<b>P6078.0X6.0<sup>1)</sup></b>	8.00	6.00	6.00	52.0
<b>P6079.6X6.0<sup>1)</sup></b>	9.60	6.00	8.00	54.0
<b>P60712.7X6.0<sup>1)</sup></b>	12.70	6.00	11.00	56.0


<sup>1)</sup> Brazed on steel shank

# P609



## Rotary Burr – Oval, Shape E

VA single cut flute style with medium spaced edges for round edge contouring. Carbide head with toughened and hardened steel shank. First choice for stainless steels.

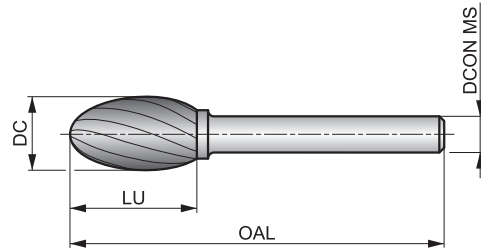

HM	E	Bright
VA	DORMER	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>M1.1</b>	<b>M1.2</b>	<b>M2.1</b>	<b>M2.2</b>	<b>M2.3</b>	<b>M3.1</b>	<b>M3.2</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>K4.1</b>	<b>K4.2</b>
■	■	■	■	■	■	■	■	■	■	▣	▣

Brazed on Steel Shank with DCON MS tolerance h7.

Product	DC	DCON MS	LU	OAL
	(mm)	(mm)	(mm)	(mm)
<b>P6098.0X6.0</b> <sup>1)</sup>	8.00	6.00	15.00	60.0
<b>P6099.6X6.0</b> <sup>1)</sup>	9.60	6.00	16.00	60.0
<b>P60912.7X6.0</b> <sup>1)</sup>	12.70	6.00	22.00	67.0


<sup>1)</sup> Brazed on steel shank

# P611



## Rotary Burr – Ball Nosed Tree, Shape F

VA single cut flute style with medium spaced edges for multi-angle contouring, rounding of edges and cutting into hard to reach areas. Carbide design for cutting diameter up to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for stainless steels.

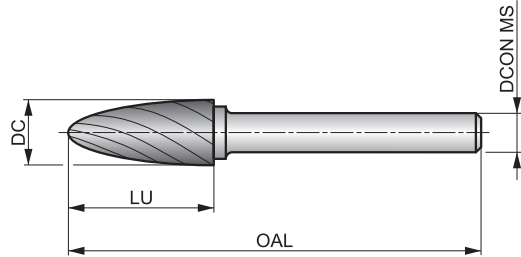

HM	F	Bright
VA		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>M1.1</b>	<b>M1.2</b>	<b>M2.1</b>	<b>M2.2</b>	<b>M2.3</b>	<b>M3.1</b>	<b>M3.2</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>K4.1</b>	<b>K4.2</b>
■	■	■	■	■	■	■	■	■	■	▣	▣

DC ≤ 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.  
 Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P6113.0X3.0</b>	3.00	3.00	14.00	38.0
<b>P6116.3X3.0<sup>1)</sup></b>	6.30	3.00	12.70	45.0
<b>P6116.0X6.0</b>	6.00	6.00	18.00	50.0
<b>P6118.0X6.0<sup>1)</sup></b>	8.00	6.00	20.00	65.0
<b>P6119.6X6.0<sup>1)</sup></b>	9.60	6.00	19.00	64.0
<b>P61112.7X6.0<sup>1)</sup></b>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P613



## Rotary Burr – Pointed Tree, Shape G

VA single cut flute style with medium spaced edges for multi-angle contouring and cutting narrow angles in hard to reach areas. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for stainless steels.

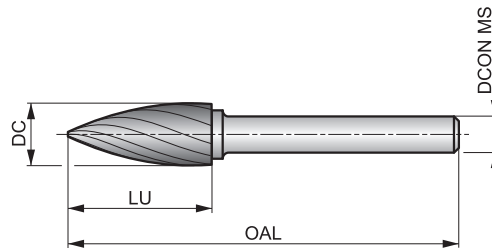

HM	
VA	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

M1.1	M1.2	M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K4.1	K4.2
■	■	■	■	■	■	■	■	■	■	▣	▣

DC=6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P6136.0X6.0	6.00	6.00	18.00	50.0
P6138.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P6139.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P61312.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P615



## Rotary Burr – Flame, Shape H

VA single cut flute style with medium spaced edges for round edge contouring and welding preparation. Carbide head with toughened and hardened steel shank. First choice for stainless steels.

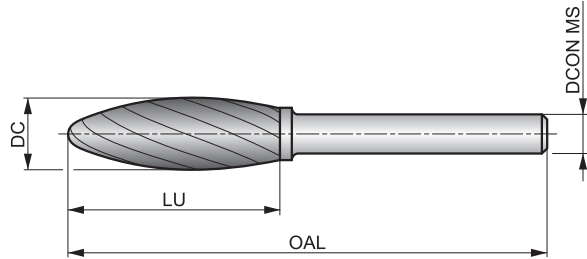

HM	H	Bright
VA	DORMER	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

M1.1	M1.2	M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K4.1	K4.2
■	■	■	■	■	■	■	■	■	■	▣	▣

Brazed on Steel Shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P6158.0X6.0 <sup>1)</sup>	8.00	6.00	19.00	64.0
P6159.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	65.0
P61512.7X6.0 <sup>1)</sup>	12.70	6.00	32.00	77.0


<sup>1)</sup> Brazed on steel shank

# P621



## Rotary Burr – Ball Nosed Cone, Shape L

VA single cut flute style with medium spaced edges for enlarging holes, rounding edges and surface finishing in tight narrow angles or other hard to reach areas. Carbide head with toughened and hardened steel shank. First choice for stainless steels.

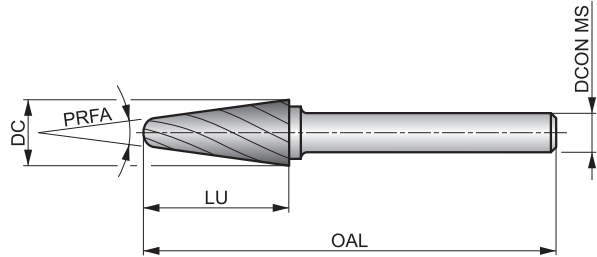

HM		Bright
VA		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

M1.1	M1.2	M2.1	M2.2	M2.3	M3.1	M3.2	M3.3	M4.1	M4.2	K4.1	K4.2
■	■	■	■	■	■	■	■	■	■	▣	▣

Brazed on Steel Shank with DCON MS tolerance h7.  
Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)	PRFA (°)
P6218.0X6.0 <sup>1)</sup>	8.00	6.00	25.40	70.0	14
P62110.0X6.0 <sup>1)</sup>	10.00	6.00	20.00	65.0	14
P62112.7X6.0 <sup>1)</sup>	12.70	6.00	32.00	77.0	14

<sup>1)</sup> Brazed on steel shank

Material code (BMC)	HM	HM	HM	HM	HM	HM	HM	HM									
Burr Type Code (BTC)	AL	AL	AL	AL	AL	AL	AL	GRP	GRP								
Burr Shape																	
Coating	Bright	Bright	Bright	Bright	Bright	Bright	Bright	Bright	Bright								
Basic standard group (BSG)	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER	DORMER								
Application angle								135°	180°								
Burr end shot																	



Product Family Code	<b>P831</b>	<b>P833</b>	<b>P835</b>	<b>P837</b>	<b>P841</b>	<b>P842</b>	<b>P843</b>	<b>P844</b>									
PSF cutting diameters range	6.00 – 12.70	6.00 – 12.70	6.00 – 12.70	6.00 – 12.70	6.00 – 12.70	6.00 – 12.70	3.00 – 8.00	3.00 – 8.00									
	224	225	226	227	228	229	230	231									


<b>P</b>	P1																
	P2																
	P3																
	P4																
<b>M</b>	M1																
	M2																
	M3																
	M4																
<b>K</b>	K1																
	K2																
	K3																
	K4																
	K5																
<b>N</b>	N1	■	■	■	■	■	■										
	N2	■	■	■	■	■	■										
	N3	▣	▣	▣	▣	▣	▣										
	N4	■	■	■	■	■	■	■	■								
	N5																
<b>S</b>	S1	▣	▣	▣	▣	▣	▣										
	S2																
	S3																
	S4																
<b>H</b>	H1																
	H2																
	H3																
	H4																

# P831



## Rotary Burr – Cylinder without endcut, Shape A

AL single cut flute style with wide spaced edges for trimming and deburring surfaces. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for non-ferrous materials and plastics.

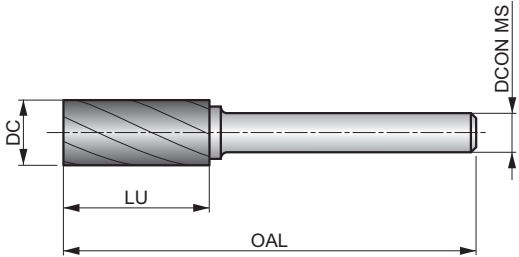

HM	A	Bright
AL		

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

N1.1	N1.2	N1.3	N2.1	N2.2	N2.3	N3.1	N3.2	N4.1	N4.2	N4.3	S1.1
■	■	■	■	■	■	▣	▣	■	■	▣	▣

DC = 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8316.0X6.0	6.00	6.00	18.00	50.0
P8319.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P83112.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P833



## Rotary Burr – Cylinder with endcut, Shape B

AL single cut flute style with wide spaced edges for trimming and deburring surfaces and right-angled corners. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for non-ferrous materials and plastics.

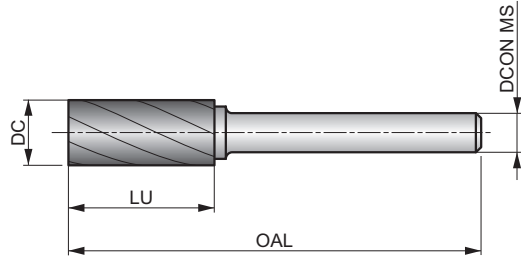

HM	B	
Bright	AL	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

N1.1	N1.2	N1.3	N2.1	N2.2	N2.3	N3.1	N3.2	N4.1	N4.2	N4.3	S1.1
■	■	■	■	■	■	▣	▣	■	■	▣	▣

DC = 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8336.0X6.0	6.00	6.00	18.00	50.0
P8339.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P83312.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P835



## Rotary Burr – Ball Nosed Cylinder, Shape C

AL single cut flute style with wide spaced edges for for trimming and deburring contours and circular arcs. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for non-ferrous materials and plastics.

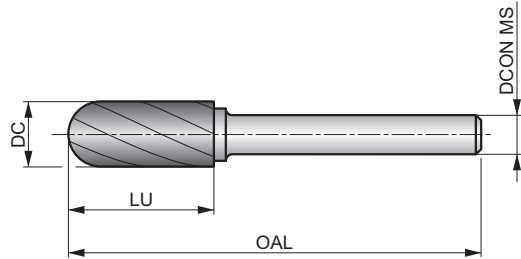

HM	C	Bright
AL		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

N1.1	N1.2	N1.3	N2.1	N2.2	N2.3	N3.1	N3.2	N4.1	N4.2	N4.3	S1.1
■	■	■	■	■	■	▣	▣	■	■	▣	▣

DC = 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8356.0X6.0	6.00	6.00	18.00	50.0
P8359.6X6.0 <sup>1)</sup>	9.60	6.00	19.00	64.0
P83512.7X6.0 <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P837



## Rotary Burr – Ball, Shape D

AL single cut flute style with wide spaced edges for intricate carving, metal engraving and welding preparation. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for non-ferrous materials and plastics.

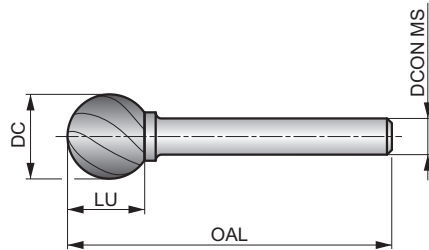

HM		Bright
AL		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

N1.1	N1.2	N1.3	N2.1	N2.2	N2.3	N3.1	N3.2	N4.1	N4.2	N4.3	S1.1
■	■	■	■	■	■	▣	▣	■	■	▣	▣

DC = 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P8376.0X6.0</b>	6.00	6.00	4.70	50.0
<b>P8379.6X6.0</b> <sup>1)</sup>	9.60	6.00	8.00	54.0
<b>P83712.7X6.0</b> <sup>1)</sup>	12.70	6.00	11.00	56.0


<sup>1)</sup> Brazed on steel shank

# P841



## Rotary Burr – Ball Nosed Tree, Shape F

AL single cut flute style with wide spaced edges for multi-angle contouring, rounding of edges and cutting into hard to reach areas. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for non-ferrous materials and plastics.

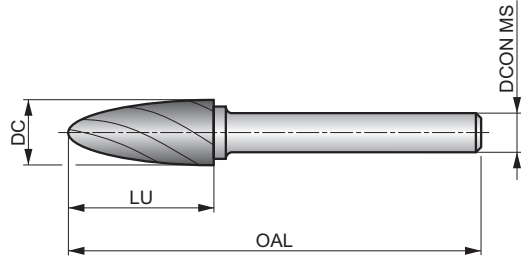

HM	F	Bright
AL		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

N1.1	N1.2	N1.3	N2.1	N2.2	N2.3	N3.1	N3.2	N4.1	N4.2	N4.3	S1.1
■	■	■	■	■	■	▣	▣	■	■	▣	▣

DC = 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P8416.0X6.0</b>	6.00	6.00	18.00	50.0
<b>P8419.6X6.0</b> <sup>1)</sup>	9.60	6.00	19.00	64.0
<b>P84112.7X6.0</b> <sup>1)</sup>	12.70	6.00	25.00	70.0


<sup>1)</sup> Brazed on steel shank

# P842



## Rotary Burr – Ball Nosed Cone, Shape L

AL single cut flute style – wide spaced edges for enlarging holes, rounding edges and surface finishing in tight narrow angles or other hard to reach areas. Carbide design for cutting diameter equal to 6 mm; above 6 mm carbide head with toughened and hardened steel shank. First choice for non-ferrous materials and plastics.

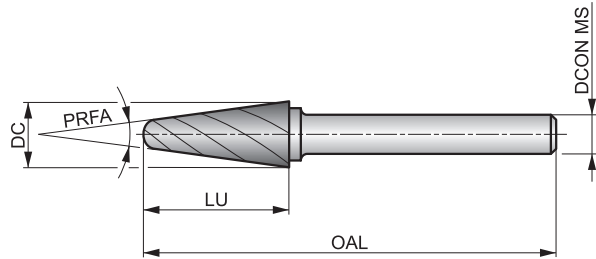

HM	L	Bright
AL		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

N1.1	N1.2	N1.3	N2.1	N2.2	N2.3	N3.1	N3.2	N4.1	N4.2	N4.3	S1.1
■	■	■	■	■	■	▣	▣	■	■	▣	▣

DC = 6.00 mm: DCON MS tolerance h6; DC > 6.00 mm: Brazed on steel shank with DCON MS tolerance h7.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)	PRFA (°)
<b>P8426.0X6.0</b>	6.00	6.00	18.00	50.0	14
<b>P8429.6X6.0</b> <sup>1)</sup>	9.60	6.00	30.00	76.0	14
<b>P84212.7X6.0</b> <sup>1)</sup>	12.70	6.00	32.00	77.0	14


<sup>1)</sup> Brazed on steel shank

# P843



## Diamond Cut Router – 135° Drill Point

GRP diamond cut flute style with medium spaced edges for contouring, making cut-out shapes and holes. Solid carbide shank for rigidity. First choice for fibreglass and composite materials.

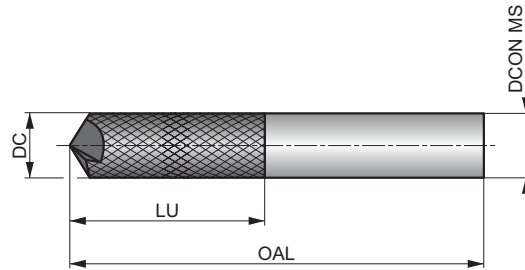

HM	Bright	
135°	GRP	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

**N4.3**

DCON MS tolerance h6.


Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8433.0X3.0	3.00	3.00	13.00	45.0
P8436.0X6.0	6.00	6.00	19.00	63.0
P8438.0X8.0	8.00	8.00	25.00	63.0

# P844



## Diamond Cut Router – End Mill

GRP diamond cut flute style with medium spaced edges for contouring, groove and pocket milling and making cut-out shapes. Solid carbide shank for rigidity. First choice for fibreglass and composite materials.

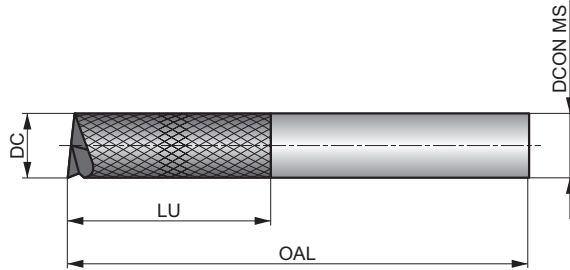

HM		Bright
	GRP	



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

### N4.3

DCON MS tolerance h6.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P8443.0X3.0	3.00	3.00	13.00	45.0
P8446.0X6.0	6.00	6.00	19.00	63.0
P8448.0X8.0	8.00	8.00	25.00	63.0




# P501



## Rotary Burr – Cylinder without endcut, Shape A

AS single cut flute style with light left-hand cross cut for trimming and deburring surfaces. Solid carbide shank for rigidity. First choice for superalloys.

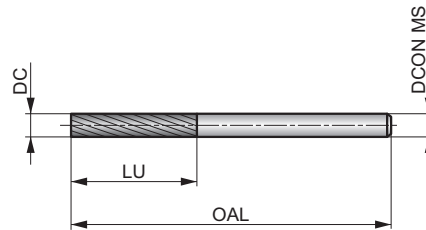

HM	A	Bright
AS		

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>M3.1</b>	<b>M3.2</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>S1.1</b>	<b>S1.2</b>	<b>S1.3</b>	<b>S2.1</b>	<b>S2.2</b>	<b>S3.1</b>	<b>S3.2</b>	<b>S4.1</b>	<b>S4.2</b>
☑	☑	☑	☑	☑	☐	☐	☐	☐	☐	☐	☐	☐	☐

DCON MS tolerance h6.

Products from this series are also available in set. Please see P880.


Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P5013.0X3.0</b>	3.00	3.00	12.00	38.0

# P505



## Rotary Burr – Ball Nosed Cylinder, Shape C

AS single cut flute style with light left-hand cross cut for trimming and deburring contours and circular arcs. Solid carbide shank for rigidity. First choice for superalloys.

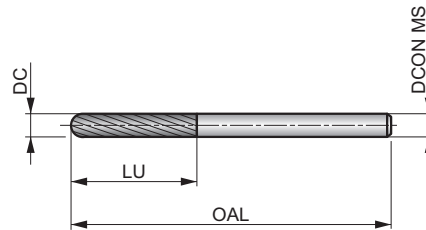

HM	C	Bright
AS		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>M3.1</b>	<b>M3.2</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>S1.1</b>	<b>S1.2</b>	<b>S1.3</b>	<b>S2.1</b>	<b>S2.2</b>	<b>S3.1</b>	<b>S3.2</b>	<b>S4.1</b>	<b>S4.2</b>
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

DCON MS tolerance h6.

Products from this series are also available in set. Please see P880.


Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P5053.0X3.0</b>	3.00	3.00	14.00	38.0

# P507



## Rotary Burr – Ball, Shape D

AS single cut flute style with light left-hand cross cut for intricate carving, metal engraving and welding preparation. Solid carbide shank for rigidity. First choice for superalloys.

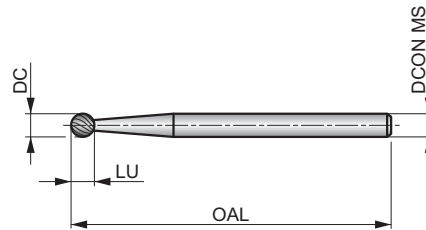

HM	D	Bright
AS		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>M3.1</b>	<b>M3.2</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>S1.1</b>	<b>S1.2</b>	<b>S1.3</b>	<b>S2.1</b>	<b>S2.2</b>	<b>S3.1</b>	<b>S3.2</b>	<b>S4.1</b>	<b>S4.2</b>
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

DCON MS tolerance h6.

Products from this series are also available in set. Please see P880.


Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P5073.0X3.0</b>	3.00	3.00	2.50	38.0

# P509



## Rotary Burr – Oval, Shape E

AS single cut flute style with light left-hand cross cut for round edge contouring. Solid carbide shank for rigidity. First choice for superalloys.

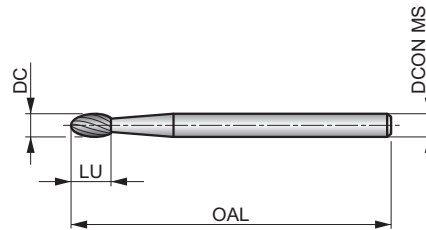

HM	E	Bright
AS		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>M3.1</b>	<b>M3.2</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>S1.1</b>	<b>S1.2</b>	<b>S1.3</b>	<b>S2.1</b>	<b>S2.2</b>	<b>S3.1</b>	<b>S3.2</b>	<b>S4.1</b>	<b>S4.2</b>
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

DCON MS tolerance h6.

Products from this series are also available in set. Please see P880.


Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P5093.0X3.0</b>	3.00	3.00	6.00	38.0

# P511



## Rotary Burr – Ball Nosed Tree, Shape F

AS single cut flute style with light left-hand cross cut for multi-angle contouring, rounding of edges and cutting into hard to reach areas. Solid carbide shank for rigidity. First choice for superalloys.

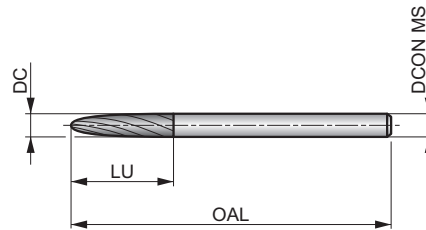

HM	F	Bright
AS		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>M3.1</b>	<b>M3.2</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>S1.1</b>	<b>S1.2</b>	<b>S1.3</b>	<b>S2.1</b>	<b>S2.2</b>	<b>S3.1</b>	<b>S3.2</b>	<b>S4.1</b>	<b>S4.2</b>
☑	☑	☑	☑	☑	☐	☐	☐	☐	☐	☐	☐	☐	☐

DCON MS tolerance h6.

Products from this series are also available in set. Please see P880.


Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
<b>P5113.0X3.0</b>	3.00	3.00	14.00	38.0

# P513



## Rotary Burr – Pointed Tree, Shape G

AS single cut flute style with light left-hand cross cut for multi-angle contouring and cutting narrow angles in hard to reach areas. Solid carbide shank for rigidity. First choice for superalloys.

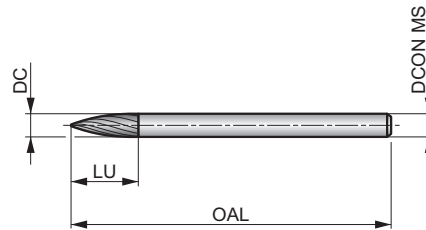

HM	G	Bright
AS		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>M3.1</b>	<b>M3.2</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>S1.1</b>	<b>S1.2</b>	<b>S1.3</b>	<b>S2.1</b>	<b>S2.2</b>	<b>S3.1</b>	<b>S3.2</b>	<b>S4.1</b>	<b>S4.2</b>
☑	☑	☑	☑	☑	☐	☐	☐	☐	☐	☐	☐	☐	☐

DCON MS tolerance h6.

Products from this series are also available in set. Please see P880.


Product	DC	DCON MS	LU	OAL
	(mm)	(mm)	(mm)	(mm)
<b>P5133.0X3.0X8.0</b>	3.00	3.00	8.00	38.0
<b>P5133.0X3.0X14.0</b>	3.00	3.00	14.00	38.0

# P515



## Rotary Burr – Flame, Shape H

AS single cut flute style with light left-hand cross cut for round edge contouring and welding preparation. Solid carbide shank for rigidity. First choice for superalloys.

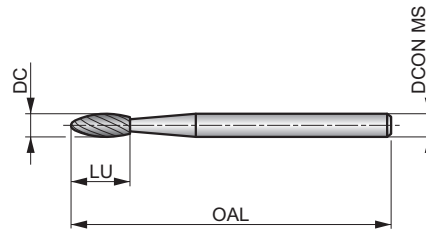

HM	H	Bright		
AS	DORMER			

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

M3.1	M3.2	M3.3	M4.1	M4.2	S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2
☑	☑	☑	☑	☑	☐	☐	☐	☐	☐	☐	☐	☐	☐

DCON MS tolerance h6.

Products from this series are also available in set. Please see P880.


Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)
P5153.0X3.0	3.00	3.00	6.00	38.0

# P521



## Rotary Burr – Ball Nosed Cone, Shape L

AS single cut flute style with light left-hand cross cut for enlarging holes, rounding edges and surface-finishing in tight narrow angles or other hard to reach areas. Solid carbide shank for rigidity. First choice for superalloys.

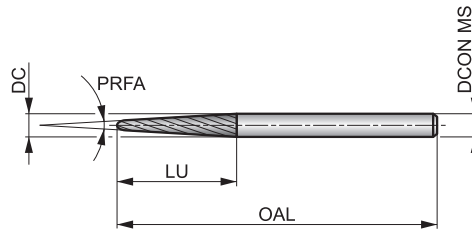

HM		Bright				
AS						

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

M3.1	M3.2	M3.3	M4.1	M4.2	S1.1	S1.2	S1.3	S2.1	S2.2	S3.1	S3.2	S4.1	S4.2
☑	☑	☑	☑	☑	☐	☐	☐	☐	☐	☐	☐	☐	☐

DCON MS tolerance h6.

Products from this series are also available in set. Please see P880.


Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)	PRFA (°)
P5213.0X3.0	3.00	3.00	14.00	38.0	8

# P523



## Rotary Burr – Cone, Shape M

AS single cut flute style with light left-hand cross cut for enlarging holes, surface finishing and cutting narrow angles in hard to reach areas. Solid carbide shank for rigidity. First choice for superalloys.

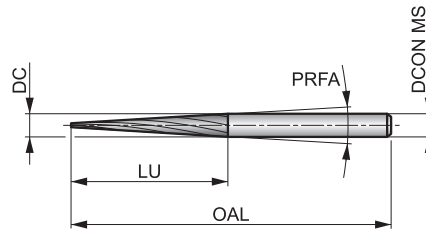

HM	M	Bright
AS		

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

<b>M3.1</b>	<b>M3.2</b>	<b>M3.3</b>	<b>M4.1</b>	<b>M4.2</b>	<b>S1.1</b>	<b>S1.2</b>	<b>S1.3</b>	<b>S2.1</b>	<b>S2.2</b>	<b>S3.1</b>	<b>S3.2</b>	<b>S4.1</b>	<b>S4.2</b>
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

DCON MS tolerance h6.

Products from this series are also available in set. Please see P880.

Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)	PRFA (°)
<b>P5233.0X3.0</b>	3.00	3.00	15.00	38.0	7

Material code (BMC)	HM	HM	HM	HM					
Burr Type Code (BTC)			BR	BR					
Coating			Bright	Bright					
Basic standard group (BSG)			DORMER	DORMER					
Application angle				150°					
Burr end shot									



Product Family Code	<b>P880</b>	<b>P890</b>	<b>P100</b>	<b>P101</b>	<b>M902</b>				
PSF cutting diameters range	Set	Set	4.90 – 10.70	4.90 – 10.70	Set				
	244	245	246	247	248				

<b>P</b>	P1		■	■					
	P2		■	■					
	P3								
	P4								
<b>M</b>	M1		■	■					
	M2		■	■					
	M3		■	■					
	M4								
<b>K</b>	K1								
	K2								
	K3								
	K4								
	K5								
<b>N</b>	N1								
	N2								
	N3								
	N4								
	N5								
<b>S</b>	S1								
	S2								
	S3								
	S4								
<b>H</b>	H1								
	H2								
	H3								
	H4								

# P880



## Rotary Burr Set

Set of different rotary burrs in various shapes, sizes and forms.

A = Styles in Set, B = No. in Set, C = Rotary Burrs in Set.

Product	Nr.	A	B	C
<b>P88001</b>	Nr01	P803 + P805 + P807 + P809 + P813	5	P8039.6X6.0; P8059.6X6.0; P8079.6X6.0; P8099.6X6.0; P8139.6X6.0
<b>P88002</b>	Nr02	P803C + P805C + P807C + P811C + P813C	5	P803C9.6X6.0; P805C9.6X6.0; P807C9.6X6.0; P811C9.6X6.0; P813C9.6X6.0
<b>P88003</b>	Nr03	P601 + P605 + P607 + P611 + P621	5	P6019.6X6.0; P6059.6X6.0; P6079.6X6.0; P6119.6X6.0; P62110.0X6.0
<b>P88004</b>	Nr04	P703 + P705 + P707 + P711 + P721	5	P7039.6X6.0; P7059.6X6.0; P7079.6X6.0; P7119.6X6.0; P72110.0X6.0
<b>P88006</b>	Nr06	P501 + P505 + P507 + P509 + P511 + P513 + P515 + P521 + P523	10	P5013.0x3.0; P5053.0x3.0; P5073.0x3.0; P5093.0x3.0; P5113.0x3.0; P5133.0x3.0x8.0; P5133.0x3.0x14.0; P5153.0x3.0; P5213.0x3.0; P5233.0x3.0

# P890



### Rotary Burrs Display

Display of 40 pieces of solid burrs of the P8xx serie. DC double cut flute style with close spaced edges. Bright finish.

A = Styles in Set, B = No. in Set, C = Rotary Burrs in Set.


Product	Nr.	A	B	C
<b>P89001EMPTY</b>	-	-	-	-
<b>P89001</b>	Nr01	P803 + P805 + P811 + P813 + P821	40	P803(6.0X6.0; 8.0X6.0; 9.6X6.0; 12.7X6.0) X 2; P805(6.0X6.0; 8.0X6.0; 9.6X6.0; 12.7X6.0) X 2; P811(6.0X6.0; 8.0X6.0; 9.6X6.0; 12.7X6.0) X 2; P813(6.0X6.0; 8.0X6.0; 9.6X6.0; 12.7X6.0) X 2; P821(6.0X6.0; 8.0X6.0; 9.6X6.0; 12.7X6.0) X 2

# P100



## 1st Stage Rotary Burr for Broken Bolt Removal, Cylinder with End Cut

First stage broken bolt removal solid carbide burr. When a bolt is broken and needs to be extracted, first use P100 to flatten the broken bolt surface. Secondly use P101. This series of burrs makes sure the threaded hole is not damaged when removing the broken piece.

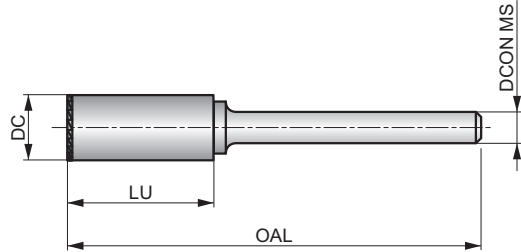

HM		Bright
BR		



Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	M1.1	M1.2	M2.1	
■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
M2.2	M2.3	M3.1	M3.2	M3.3										
■	■	■	■	■										


Product	DC (mm)	DCON MS (mm)	LU (mm)	OAL (mm)	
P1004.9	4.90	6.00	20.00	50.0	1/4-20; 24; 28; M6
P1006.4	6.40	6.00	5.00	50.0	5/16-18; 24; 32; M8
P1007.8	7.80	6.00	19.00	65.0	3/8-16; 24; M10
P1009.3	9.30	6.00	19.00	65.0	7/16-14; 20; M12
P10010.7	10.70	6.00	25.00	70.0	1/2-13; 20; M14

# P101



## 2nd Stage Rotary Burr for Broken Bolt Removal, 150° Countersink

Second stage broken bolt removal solid carbide burr. When a bolt is broken and needs to be extracted, P101 creates a centerpoint into the flattened broken bolt. Prepare it for the 3rd stage, drilling the broken piece with a drill.

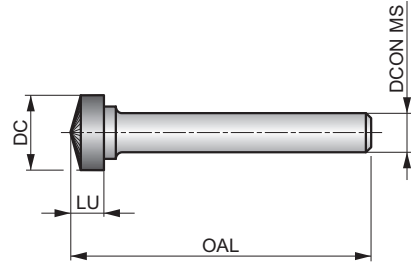

HM	Bright	150°
BR	DORMER	

Workpiece material group suitability. Recommended operating speed (RPM) on page 277.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	M1.1	M1.2	M2.1
■	■	■	■	■	■	■	■	■	■	■	■	■	■
M2.2	M2.3	M3.1	M3.2	M3.3									
■	■	■	■	■									

Product	DC	DCON MS	LU	OAL	
	(mm)	(mm)	(mm)	(mm)	
P1014.9	4.90	6.00	20.00	50.0	1/4-20; 24; 28; M6
P1016.4	6.40	6.00	5.00	50.0	5/16-18; 24; 32; M8
P1017.8	7.80	6.00	5.00	50.0	3/8-16; 24; M10
P1019.3	9.30	6.00	5.00	50.0	7/16-14; 20; M12
P10110.7	10.70	6.00	5.00	50.0	1/2-13; 20; M14



## M902

**DORMER**



### Bolt Removal Kit

Tools for removing broken right-handed bolts come in a set of four. First, use the P100 burr to flatten the bolt. Second, use the P101 burr to create a starting cone. Third, use the HSS-E stub drill A117 to drill a hole for the extractor. Finally, use the screw extractor in a counter-clockwise motion to remove the broken bolt without damaging the threads.

A = Styles in Set, B = No. in Set, C = Diameters in Set.

Product	Nr.	A	B	C
<b>M902M6-M8</b>	M6 – M8	M900, P100, P101, A117	4	P1004.9, P1014.9, A1173.0, M9002
<b>M902M8-M10</b>	M8 – M10	M900, P100, P101, A117	4	P1006.4, P1016.4, A1174.0, M9003
<b>M902M10-M12</b>	M10 – M12	M900, P100, P101, A117	4	P1007.8, P1017.8, A1174.2, M9003
<b>M902M12-M14</b>	M12 – M14	M900, P100, P101, A117	4	P1009.3, P1019.3, A1176.0, M9004
<b>M902M14-M16</b>	M14 – M16	M900, P100, P101, A117	4	P10010.7, P10110.7, A1178.0, M9005



PMK  
NSH



# INSTRUCTIONS

---

## SOLID MILLS – PAGE OVERVIEW


### 1 S771HB

DORMER



#### 2 5-Flute Solid Carbide End Mill, Chip Dividers and Through Coolant

Short cut length, 5-flute design with neck recess and unequal helix helps to reduce vibrations especially when using the cutter in dynamic milling strategies. AlCrN coating improves performance and extends the tool life. Chip divider and through coolant improve chip evacuation in pocketing operation.



HM	FS	NOF 5
$\lambda$	$\gamma$ 10°	
DIN 6535HB	AlCrN	DC h9
DORMER		



Workpiece material group suitability, starting values for cutting speed (m/min) and Alpha Code. Tables with feed per tooth and correction factors can be found starting from page 266.

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P3.3	P4.1	P4.2	M1.1	M1.2	M2.1
222 J	248 J	255 J	189 J	166 J	147 I	153 J	123 I	104 I	90 I	78 I	128 I	108 I	113 I
M2.2	M3.1	M3.2	K1.1	K1.2	K1.3	K2.1	K2.2	K2.3	K3.1	K3.2	K3.3	K4.1	K4.2
93 I	105 I	90 I	218 J	162 J	122 J	225 J	183 J	146 I	198 J	152 I	123 I	185 I	139 I
K4.3	K4.4	K4.5	K5.1	K5.2	K5.3	S1.2	S2.1	S3.1	S4.1				
102 I	87 I	72 I	209 I	156 I	122 I	76 I	59 I	44 G	35 G				

DCON MS tolerance h6; RE ±0.01 mm.

Product	DC (mm)	RE (mm)	DCON MS (mm)	APMX (mm)	OAL (mm)	NOF	LU (mm)	DN (mm)
S771HB10.0	10.00	0.20	10.00	25.00	72.0	5	30.00	9.70
S771HB12.0	12.00	0.20	12.00	30.00	83.0	5	38.00	11.70
S771HB16.0	16.00	0.30	16.00	39.00	92.0	5	44.00	15.70
S771HB20.0	20.00	0.30	20.00	48.00	104.0	5	54.00	19.70

Pos.	Description
1	Designation of solid mills
2	Product description
3	Illustrative picture
4	Schematic drawing of tool
5	Product features



Pos.	Description
6	Milling operations
7	Material group recommendations incl. speed and feed guidance
8	Product code
9	Product dimensions

## ICONS OVERVIEW

















### General Icons

<input type="checkbox"/>	Primary use	<input checked="" type="checkbox"/>	Possible use
--------------------------	-------------	-------------------------------------	--------------






### Mill Profile

<b>N</b>	General Purpose Cutter Type for Low to High Resistance Materials	<b>NRA</b>	Coarse Pitch Asymmetrical Rounded Profile Chipbreaker		Fine Pitch
<b>FS</b>	Semi-finishing Profile Chipbreaker	<b>NR</b>	Coarse Pitch Rounded Profile Chipbreaker		Coarse Pitch
<b>HRA</b>	Fine Pitch Asymmetrical Rounded Profile Chipbreaker	<b>W</b>	Non-ferrous Cutter Type for Soft Malleable Materials		
<b>NF</b>	Coarse Pitch Flat Profile Chipbreaker	<b>W NRA</b>	Non-ferrous Cutter Type with Coarse Pitch Asymmetrical Rounded Profile Chipbreaker		













### Number of flutes (NOF)

	Number of Flutes = 1 (single tooth)		Number of Flutes = 3 – 6 (teeth)		Number of Flutes = 6 – 12 (teeth)
	Number of Flutes = 2 (teeth)		Number of Flutes = 4 (teeth)		Number of Flutes = 6 – 8 (teeth)
	Number of Flutes = 3 (teeth)		Number of Flutes = 4 (teeth) differential pitch		Number of Flutes = 8 (teeth)
	Number of Flutes = 3 (teeth) differential pitch		Number of Flutes = 4 – 5 (teeth)		Number of Flutes = 10 – 12 (teeth)
	Number of Flutes = 3 – 4 (teeth)		Number of Flutes = 4 – 6 (teeth)		
	Number of Flutes = 3 – 5 (teeth)		Number of Flutes = 5 (teeth)		

### Cut length

















	Cut Length, Short		Cut Length, Long		Cut Length, Extra long
	Cut Length, Medium		Cut Length, Extra Short		

### Flute helix angle (FHA)






	0° Helix Angle (Straight Flute)		28° Helix Angle (Flute)		40° Helix Angle (Flute)
	10° Helix Angle (Flute)		30° Helix Angle (Flute)		45° Helix Angle (Flute)
	15° Helix Angle (Flute)		34° Helix Angle (Flute)		50° Helix Angle (Flute)
	25° Helix Angle (Flute)		35° Helix Angle (Flute)		Unequal (Variable) Helix

## ICONS OVERVIEW











### Radial rake angle (GAMF)

 -26°	-26° Radial Rake Angle (cutting)	 5°	5° Radial Rake Angle (cutting)	 13°	13° Radial Rake Angle (cutting)
 -10°	-10° Radial Rake Angle (cutting)	 7°	7° Radial Rake Angle (cutting)	 20°	20° Radial Rake Angle (cutting)
 -6°	-6° Radial Rake Angle (cutting)	 8°	8° Radial Rake Angle (cutting)	 15°	15° Radial Rake Angle (cutting)
 0°	0° Radial Rake Angle (Neutral)	 9°	9° Radial Rake Angle (cutting)	 18°	18° Radial Rake Angle (cutting)
 3°	3° Radial Rake Angle (cutting)	 10°	10° Radial Rake Angle (cutting)		
 4°	4° Radial Rake Angle (cutting)	 12°	12° Radial Rake Angle (cutting)		




### Shank

 DIN 1835B	DIN 1835B Weldon Shank	 DIN 6535HA	DIN 6535 HA Cylindrical Shank	 DIN 1835A	DIN 1835A Cylindrical Shank
 DIN 6535HB	DIN 6535 HB Weldon Shank	 DIN 1835	DIN 1835 – B (Weldon) or D (Threaded) Shank		

### Cutting diameter tolerance class (TCDC)

 DC <b>d11</b>	d11 – Industry Standard Tool Tolerance Zone (based on diameter range)	 DC <b>h11</b>	h11 – Industry Standard Tool Tolerance Zone (based on diameter range)	 DC <b>k10</b>	k10 – Industry Standard Tool Tolerance Zone (based on diameter range)
 DC <b>e8</b>	e8 – Industry Standard Tool Tolerance Zone (based on diameter range)	 DC <b>h12</b>	h12 – Industry Standard Tool Tolerance Zone (based on diameter range)	 DC <b>k12</b>	k12 – Industry Standard Tool Tolerance Zone (based on diameter range)
 DC <b>h9</b>	h9 – Industry Standard Tool Tolerance Zone (based on diameter range)	 DC <b>js14</b>	js14 – Industry Standard Tool Tolerance Zone (based on diameter range)		
 DC <b>h10</b>	h10 – Industry Standard Tool Tolerance Zone (based on diameter range)	 DC <b>js16</b>	js16 – Industry Standard Tool Tolerance Zone (based on diameter range)		

### Direction














 Radial, Diagonal, Axial	 Radial
 Radial, Diagonal	 Radial

### Cooling (CSP)

 Through Tool Coolant
---

## ICONS OVERVIEW

### Basic standard group (BSG)

 Dormer Standards	 DIN 6527 K – Carbide End Mill Standards	 DIN 851 – T-Slot Cutter Standards
 DIN 327 D – Slot Drill Standards	 DIN 1880 – Shell Mill Standards	 DIN 885 A – Side & Face Mill Standards
 DIN 844 L – HSS End Mills Standards	 DIN 1837 – Fine Slitting Saw Standards	 DIN 1833 C – Dovetail Cutter Standards
 DIN 844 K – End Mill Standards	 DIN 1838 – Coarse Slitting Saw Standards	
 DIN 6527 L – Carbide End Mill Standards	 DIN 850 – Keyseat Cutter Standards	














### Application angle

 60° Countersink	 Drill point 135°	 Spot drill point 150°
 90° Countersink	 Drill point 180°	








### Burr end shot

 End Mill Burr End	 End Cut Burr End	 Drill Point Burr End
--	--	--

### Burr Shape

 Cylinder Shape without endcut	 Ball Nosed Tree Shape	 Ball Nosed Cone Shape
 Cylinder Shape with endcut	 Pointed Tree Shape	 Cone Shape
 Ball Nosed Cylinder Shape	 Flame Shape	 Inverted Cone Shape
 Ball Shape	 60° Countersink Shape	
 Oval Shape	 90° Countersink Shape	

### Burr Type Code (BTC)

 Steel Cut Geometry	 Aluminium Cut Geometry	 Bolt Removal Cut Geometry
 Stainless Steel Cut Geometry	 Fibreglass and Composite Materials Cut Geometry	
 Double Cut Geometry	 Superalloy Cut Geometry	

## ICONS OVERVIEW

### Material code (BMC)

<b>HSS</b>	High Speed Steel Tool Material	<b>HSS-E PM</b>	High Speed Cobalt Powder Metal Tool Material
<b>HSS-E</b>	High Speed Cobalt Steel Tool Material	<b>HM</b>	Hard Material (Solid Carbide)


### Coating

 Bright	Bright (uncoated)	 TiSiN	Titanium Silicon Nitride Coating	 AlTiN	Aluminium Titanium Nitride Coating
 Hi	Polished Bright Surface Finish	 TiCN	Titanium Carbonitride Coating	 AlCrN	Aluminium Chromium Nitride Coating
 ST	Steam Tempered (Steam Oxide) Surface Treatment	 TiAlN	Titanium Aluminium Nitride Coating	 AlCrN	Aluminium Chromium Nitride Coating
 X-CEED	Special AlTiN Coating (with highest oxidation resistance)	 Diamond	Diamond Like Coating		

### Operations deburring

	Bolt removal operation 1		Curved surface deburring and carving		Inverted back deburring
	Bolt removal operation 2		Fillet radii deburring		Plain surface deburring
	Closed groove deburring and carving		Free hand deburring and carving		Shoulder deburring
	Composite fibre routing		Chamfer deburring		V-groove deburring

### Other icons


	Bolt size
--	-----------

## CUTTING TOOL PARAMETERS ACCORDING TO ISO 13399

All cutting tools are defined by a number of parameters according to the standard ISO 13399. This list contains all the parameters used in this catalogue and their definitions.

ISO 13399 is an international cutting tool information standard. It provides dimensions and parameters in a neutral format that is independent of any particular system or company nomenclature. When cutting tools are clearly defined according to a global standard, all types of software can process the electronic data more quickly, improving the quality of communication and helping to make the exchange of information run smoothly. Supporting a common language in our cutting tool descriptions this will assist system to system communication. It will save you a significant amount of time, providing an easier gathering of high-quality data across our 40,000 solid and indexable tools. By using an ISO 13399 compliant system, there will be no need to manually interpret data and key-enter it into your system.

### EXAMPLES ONLY!

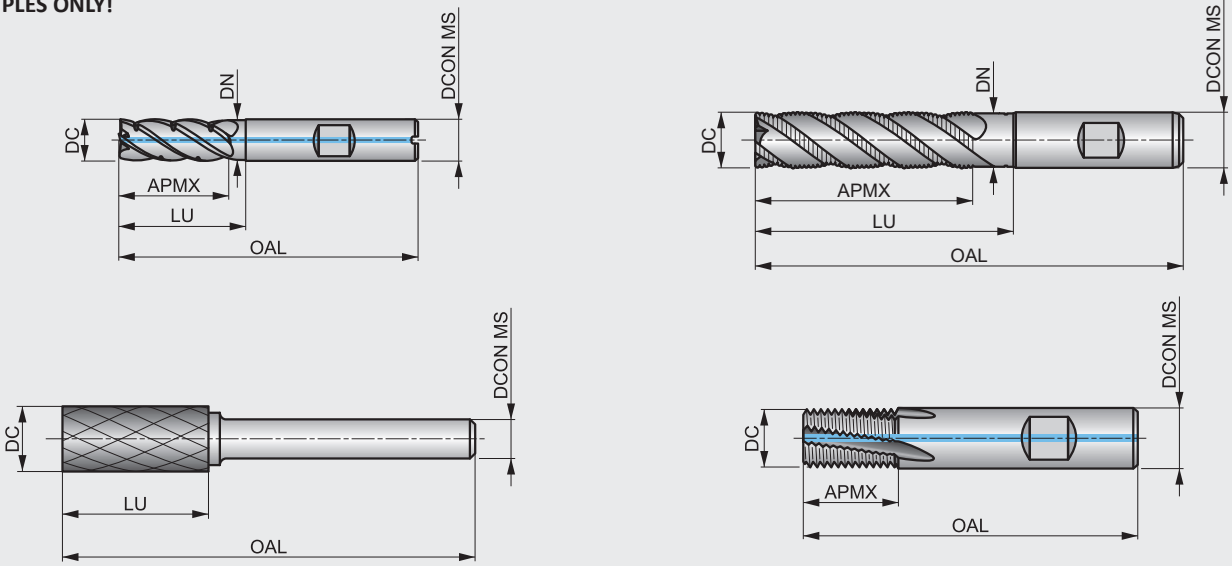





ISO 13399 code	Description
APMX	Depth of cut maximum
BD	Body diameter
BDX	Body diameter maximum
BCH	Corner chamfer length
BS	Wiper edge length
CBDP	Connection bore depth
CDI	Insert cutting diameter
CDX	Cutting depth maximum
CW	Cutting width
CZC MS	Connection size code machine side
D1	Fixing hole diameter
DAH4	Diameter access hole
DAH5	Diameter access hole
DAH6	Diameter access hole
DBC1	Diameter bolt circle 1
DBC2	Diameter bolt circle 2
DBC4	Diameter bolt circle
DBC5	Diameter bolt circle
DBC6	Diameter bolt circle
DC	Cutting diameter
DCB	Connection bore diameter
DCCB	Counterbore diameter connection bore

ISO 13399 code	Description
DCN	Cutting diameter minimum
DCON MS	Connection diameter
DCX	Cutting diameter maximum
DHUB	Hub diameter
DN	Neck diameter
GAMF	Radial rake angle
GAMP	Axial rake angle
CHW	Corner chamfer width
IC	Inscribed circle diameter
INSD	Insert diameter
INSL	Insert length
KAPR	Tool cutting edge angle
KWD	Keyway depth
KWW	Keyway width
L	Cutting edge length
LB	Body length
LE	Cutting edge effective length
LF	Functional length
LH	Head length
LU	Usable length
LUX	Usable length maximum
M	M-dimension
NOF	Number of flutes

ISO 13399 code	Description
OAL	Overall length
P	Pitch of the blade
PRFA	Profile angle
PRFRAD(2)	Profile radius
RE	Radius
S	Insert thickness
S1	Insert thickness total
TDZ	Thread diameter size
TP	Thread pitch
TPI	Threads per inch
W1	Insert width
ZNP	Number of peripheral edges in the tool

## MATERIALS AND COATING

### Materials


<b>High Speed Steel</b>		A medium-alloyed high speed steel that has good machinability and good performance. HSS exhibits hardness, toughness and wear resistance characteristics that make it attractive in a wide range of applications, for example in drills and taps.
<b>Cobalt High Speed Steel</b>		This high speed steel contains cobalt for increased hot hardness. The composition of HSCo is a good combination of toughness and hardness. It has good machinability and good wear resistance, which makes it usable for drills, taps, milling cutters and reamers.
<b>Sintered Cobalt High Speed Steel</b>		Sintered Cobalt High Speed Steel (HSCo powder metal) is a substrate produced using powder metallurgy technology. Tools using substrates produced by this method exhibit superior toughness and grindability.
<b>Carbide Materials (or Hard Materials)</b>		A sintered powder metallurgy substrate, consisting of a metallic carbide composite with binder metal. The most central raw material is tungsten carbide (WC). Tungsten carbide contributes to the hardness of the material. Tantalum carbide (TaC), titanium carbide (TiC) and niobium carbide (NbC) complements WC and adjusts the properties to what is desired. These three materials are called cubic carbides. Cobalt (Co) acts as a binder and keeps the material together.

### Surface Treatments/Surface Coatings



<b>Bright (uncoated)</b>		Bright finish (uncoated surface) improves chip flow in soft or non-ferrous materials and maintains sharp cutting edges in abrasive materials.
<b>Steam Tempering</b>		Steam tempering gives a strongly adhering blue oxide surface that acts to retain cutting fluid and prevent chip to tool welding, thereby counteracting the formation of a built-up edge. Steam tempering can be applied to any bright tool but is most effective on drills and taps.
<b>Polished Bright Surface Finish</b>		Bright polished surface finish greatly improves chip flow in soft or gummy non-ferrous materials. Polishing facilitates chip evacuation and prevents material from sticking to cutting edges and in flutes.
<b>Titanium Carbon Nitride Coating (TiCN)</b>		Titanium Carbon Nitride is a ceramic coating applied by PVD coating technology. TiCN is harder than TiN and has a lower coefficient of friction. Its hardness and toughness in combination with good wear resistance ensures that it finds its principal application in the field of milling to enhance the performance of milling cutters.
<b>Titanium Aluminium Nitride Coatings (TiAlN, TiAlN-Top &amp; X-CEED)</b>		Titanium Aluminium Nitride is a multi layer ceramic coating applied by PVD coating technology, which exhibits high toughness and oxidation stability. These properties make it ideal for higher speeds and feeds, while at the same time improving tool life. TiAlN is used in drilling, tapping, and milling applications and can be suitable for use when machining without coolant. TiAlN-Top coating is the same as TiAlN but with a post-coating process designed to smooth out imperfections, enhance chip flow and reduce built up edge. X-CEED type TiAlN coating, also known as Futura-Nano coating is a nanolayered coating designed for higher hot hardness and higher stress applications.
<b>Aluminium Titanium Nitride Coating (AlTiN)</b>		Aluminium Titanium Nitride (AlTiN) is a nanolayered broad based coating technology which is an upgrade to the conventional TiAlN coatings and can offer superior toughness, high hot hardness and oxidation resistance.
<b>Alcrona Coatings (AlCrN, Alcrona, Alcrona-Top &amp; Alcrona-Pro)</b>		The Alcrona (AlCrN) family of coatings are aluminium chromium nitride coatings mostly used for milling cutters. The two unique properties of these coatings are high hot hardness and high oxidation resistance. When used on tools for machining applications involving heavy mechanical and thermal stresses, these properties translate into superior wear resistance. Multiple levels or specific versions of these coatings are available and specific for various tools and applications.
<b>Titanium Silicon Nitride Coating (TiSiN)</b>		TiSiN is designed for extreme cutting conditions and high speed machining of hard materials. This multi-layered coating has a nano-composite outer layer with Si <sub>3</sub> N <sub>4</sub> nano-crystallites in a crystalline TiN matrix and is engineered to protect the cutting edge from heat transfer, oxidation and abrasion. TiSiN coatings can perform well at minimum to zero lubrication conditions.
<b>Diamond Like Coating (DLC)</b>		Diamond Like Coating, also known as Diamond Like Carbon (DLC) provides the highest lubricity when used on carbide tools and avoids built up edge when machining graphite or soft non-ferrous materials.

## MILLING TECHNICAL INFO

### Nomenclature

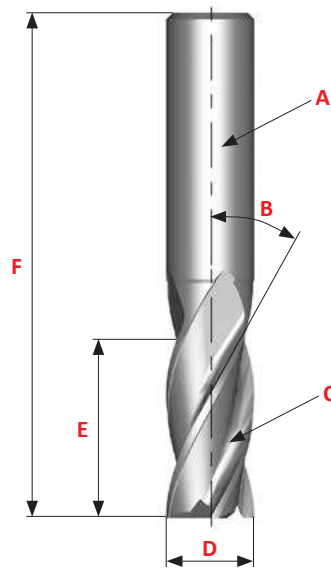

- A** Shank
- B** Helix Angle
- C** Flute
- D** Outside Diameter *DC*
- E** Cutting Length *AP*
- F** Overall Length *OAL*

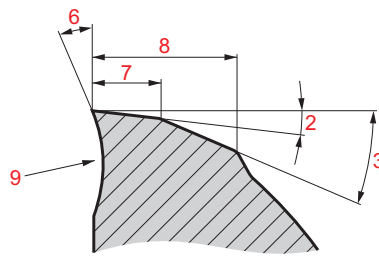

- 1** Gash
- 2** Primary Relief Angle
- 3** Secondary Relief Angle
- 4** Heel
- 5** Cutting Edge
- 6** Rake Angle
- 7** Width of Primary Relief Land
- 8** Width of Secondary Relief Land
- 9** Undercut Face

### Features Of The End Mill – Choosing The Number Of Flutes *NOF*

Number of flutes should be determined by:

- Milled material
- Dimension of workpiece
- Milling conditions

	2 Flutes	3 Flutes	4 Flutes (or multi-flutes)	
<b>LOW</b>	<b>DEFLECTION STRENGTH</b>			<b>HIGH</b>
<b>BIG</b>	<b>CHIP SPACE</b>			<b>SMALL</b>
	<ul style="list-style-type: none"> <li>• Large chip space</li> <li>• Easy chip ejection</li> <li>• Good for slot milling</li> <li>• Good for heavy duty milling</li> <li>• Less rigidity due to small section area</li> <li>• Lower quality surface finish</li> </ul>	<ul style="list-style-type: none"> <li>• Chip space almost as large as for 2 flutes</li> <li>• Larger section area – higher rigidity than 2 flutes</li> <li>• Improved surface finish</li> </ul>	<ul style="list-style-type: none"> <li>• Highest rigidity</li> <li>• Largest section area – small chip space</li> <li>• Gives best surface finish</li> <li>• Recommended for profiling, side milling and shallow slotting</li> </ul>	

## MILLING TECHNICAL INFO

### Features Of The End Mill – Helix Angle

Increasing the number of flutes makes the load on the single tooth more homogeneous and consequently, this allows for a better finish. But with a high helix angle, the load *FV* along the cutter axis is increased too.

A high *FV* can give:

- Load problems on the spindle bearings
- Cutter movement along the spindle axis. To avoid this problem it is necessary to use Weldon or better Mechanical or Hydraulical Toolholder.




### General hints on milling

Milling is a process of generating machined surfaces by progressively removing a predetermined amount of material or stock from the workpiece at a relatively slow rate of movement or feed by a milling cutter rotating at a comparatively high speed.

The characteristic feature of the milling process is that each milling cutter tooth removes its share of the stock in the form of small individual chips.

### Type of milling cutters

The three basic milling operations are shown below: (A) peripheral milling, (B) face milling and (C) end milling.

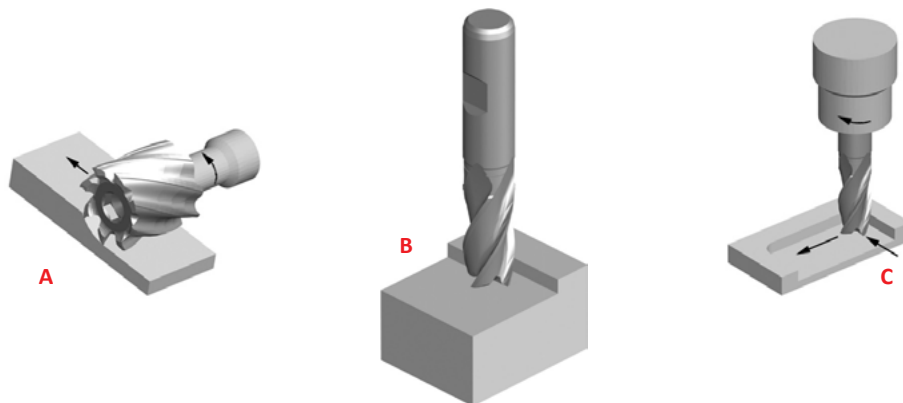

In peripheral milling (also called slab milling), the axis of cutter rotation is parallel to the workpiece surface to be machined. The cutter has a number of teeth along its circumference, each tooth acting like a single-point cutting tool called a plain mill. Cutters used in peripheral milling may have straight or helical teeth generating an orthogonal or oblique cutting action.






In face milling, the cutter is mounted on a spindle with an axis of rotation perpendicular to the workpiece surface. The milled surface results from the action of cutting edges located on the periphery and face of the cutter.

In end milling, the cutter generally rotates on an axis vertical to the workpiece. It can be tilted to machine tapered surfaces. Cutting teeth are located on both the end face of the cutter and the periphery of the cutter body.

## MILLING TECHNICAL INFO

### Different applications for end mills



The Metal Removal Rate (MRR) and the applications are strongly related. For each different application we have a different MRR that increases with the engagement section of the cutter on the workpiece. The recent Dormer catalogue was produced with simple icons that show the different applications.

Side Milling	Face Milling	Slot Milling	Plunge Milling	Ramping
				
The radial depth of cut should be less than 0.25 of the diameter of the end mill.	The radial depth of cut should be no more than 0.9 of the diameter, axial depth of cut less than 0.1 of the diameter.	Machining of a slot for keyways. The radial depth of cut is equal to the diameter on the end mill.	It is possible to drill the workpiece with an end mill only with the cutting centre. In this operation the feed has to be halved.	Both axial and radial entering into the workpiece.

### Milling Effectively


#### Types Of Cuts

#### Climb Milling Versus Conventional Milling

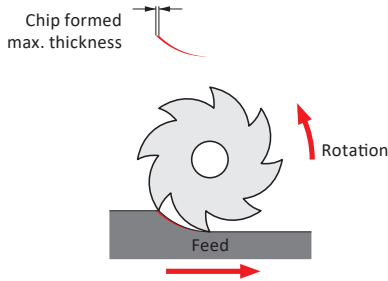CLIMB MILLING	CONVENTIONAL MILLING
 <p>Chip formed max. thickness</p> <p>Rotation</p> <p>Feed</p>	 <p>Chip started zero thickness</p> <p>Rotation</p> <p>Feed</p>
<p>In climb milling, the cutter revolves in the same direction as the table feed. The tooth meets the work at the top of the cut, producing the thickest part of the chip first. In horizontal applications the resultant force created by climb milling can act as a clamping force, acting towards the machine table.</p> <p>It is important to make sure that the machine tool has no leadscrew backlash. Normally climb milling improves product surface finish and increases tool life.</p>	<p>In conventional milling, the cutter revolves opposite to the direction of table feed. Therefore the width of the chip starts at zero and increases to a maximum at the end of the cut. This can lead to accelerated tool wear under some conditions. Conventional milling may be advantageous when milling hot rolled steel, surface hardened and steels with a surface scale.</p>

### PERIPHERAL (CYLINDRICAL, SLAB) MILLING

Peripheral Milling: The milling of a surface which is parallel to the end mill axis.

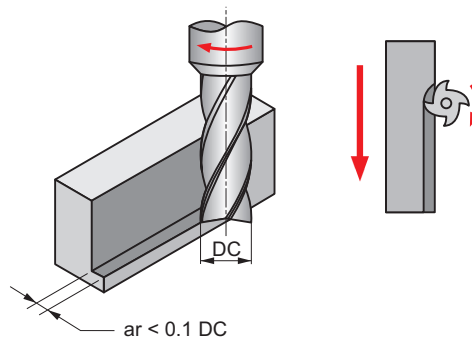


The radial depth of cut should be less than 0.1 of the diameter of the mill:  $ar < 0.1 DC$ .

## MILLING TECHNICAL INFO

### Plunge Milling


The direct movement between the workpiece and the centre line of the end mill when the end mill sinks directly into the workpiece.

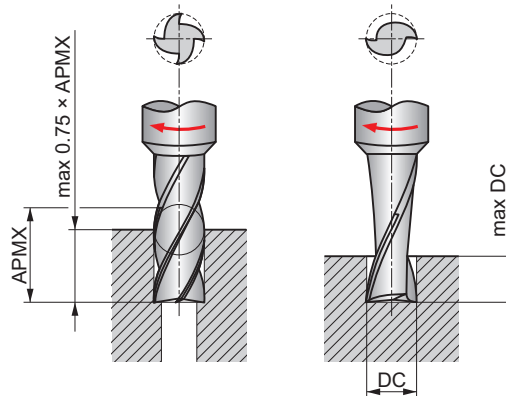

In order to be able to “drill,” i.e. mill with axial feed, an end mill must have an end face cutting edge that goes all the way to the centre. An example of such a solid drilling operation is keyway milling in the middle of a shaft.

In boring, the depth of a hole may be up to 75 % of the cutting edge length. In solid drilling, however, it should not exceed 0.5 – 1.0 DC.

### Slot Milling

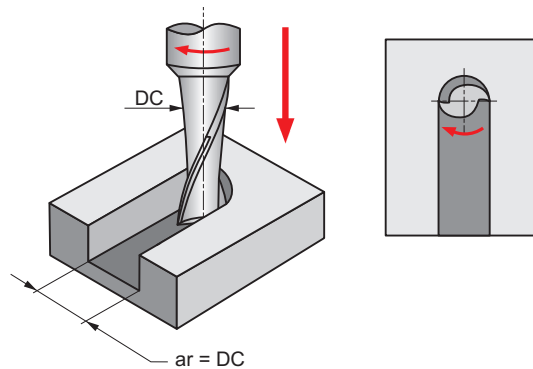

The radial depth of cut is equal to the diameter of the mill:  $ar = DC$ .

All slotting applications are a combination of conventional and climb milling. Refer to adjacent section.

### End Mill Selection

Utilize the shortest possible tool available for the application with the largest diameter permissible and the shortest flute length as depth of cut allows. Extra length end mills have excessive overhang, thus a reduction in feed up to 25 % may be required. Stub length end mills, due to their short overall and flute length, have more rigidity, thus an increase in feed rates of up to 25 % may be required.

### Speeds


Solid Carbide end mills must be run at higher speeds than High Speed Steel end mills. Many times, lighter cuts at higher speeds can improve the finish of the workpiece.

When the application is a slotting cut, the speed should be reduced by approximately 20 %. Speeds should be decreased when milling hard or tough materials or when taking heavy cuts. Speeds should be increased when milling softer materials or when taking lighter cuts. Speeds should also be increased for finishing cuts.

### Coolants

Coolants are recommended when milling mild steel and high temperature alloys. The purpose of the coolant media is to direct the chips away from the cutting tool and workpiece. This prevents damage to the cutting edges due to recutting the chips. When machining titanium, coolant flow must be heavy and directed at the area of cut to prevent overheating and assist in chip removal.

## SOLID HSS MILLS – FEED PER TOOTH TABLE

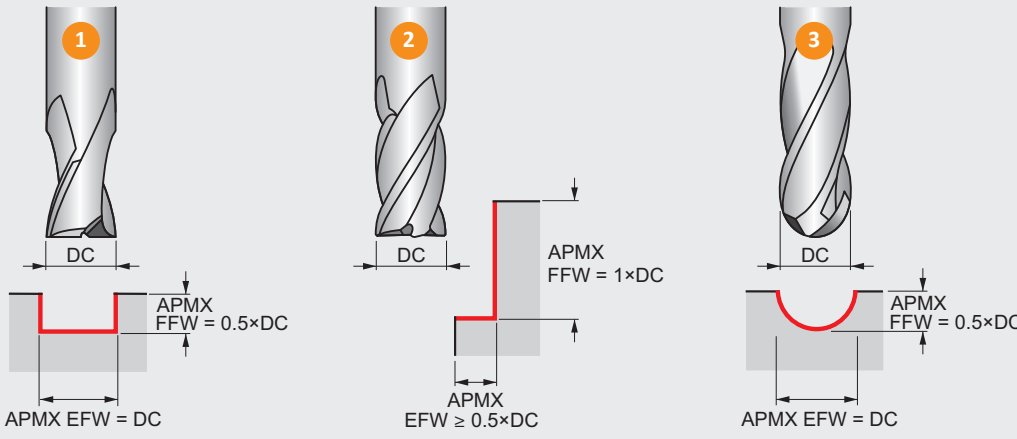

Feed per tooth  $f_z$  (mm/tooth) depending on the working conditions it might be necessary to adjust these values  $\pm 25\%$ .  
 ONLY if plunging into solid material with a centre cutting end mill the values in this table should be considered as  $f_n$  (feed per revolution).

### How to use this table to find the feed per tooth $f_z$ :

1. Find your Alpha Code on the product page (example: 48C, "C" is the Alpha Code).
2. Find the closest diameter for your cutting application in the top row of the table.
3. Find your Alpha Code in the left column of the table.
4. The intersection (cell) of the Diameter and Alpha Code is the feed per tooth  $f_z$ .

**FOR HSS,  
HSS-E AND  
HSS-E-PM MILLING  
CUTTERS ONLY**

		$\varnothing$ DC (mm)																		
		1.00	2.00	3.00	4.00	5.00	6.00	8.00	10.0	12.0	16.0	20.0	25.0	28.0	32.0	36.0	40.0	63.0	80.0	100.0
Feed rates (mm/tooth)	A	0.002	0.003	0.003	0.005	0.005	0.005	0.007	0.009	0.011	0.015	0.018	0.023	0.027	0.030	0.033	0.034	0.043	0.045	0.042
	B	0.003	0.004	0.004	0.006	0.006	0.007	0.009	0.012	0.014	0.018	0.023	0.029	0.033	0.038	0.041	0.043	0.054	0.057	0.052
	C	0.004	0.004	0.005	0.007	0.008	0.008	0.011	0.015	0.017	0.023	0.029	0.036	0.042	0.047	0.051	0.054	0.067	0.071	0.065
	D	0.005	0.006	0.006	0.009	0.010	0.010	0.014	0.018	0.022	0.029	0.036	0.045	0.052	0.059	0.064	0.067	0.084	0.089	0.082
	E	0.006	0.007	0.008	0.011	0.012	0.013	0.017	0.023	0.027	0.036	0.045	0.056	0.065	0.074	0.080	0.084	0.105	0.111	0.102
	F	0.007	0.008	0.010	0.013	0.014	0.016	0.020	0.028	0.032	0.043	0.054	0.067	0.078	0.089	0.096	0.101	0.126	0.133	0.122
	G	0.009	0.010	0.012	0.016	0.017	0.019	0.024	0.033	0.039	0.052	0.065	0.081	0.094	0.107	0.115	0.121	0.151	0.160	0.147
	H	0.010	0.012	0.014	0.019	0.021	0.022	0.029	0.040	0.047	0.062	0.078	0.097	0.112	0.128	0.138	0.145	0.181	0.192	0.176
	I	0.012	0.015	0.017	0.023	0.025	0.027	0.035	0.048	0.056	0.075	0.093	0.116	0.135	0.153	0.166	0.174	0.218	0.230	0.212
	J	0.015	0.017	0.020	0.027	0.030	0.032	0.042	0.057	0.067	0.090	0.112	0.139	0.162	0.184	0.199	0.209	0.261	0.276	0.254

This table is valid for end mills and shell mills.

Formulas (Metric)		Terms		Formulas (Imperial)	
$v_c = \frac{n \times DC \times \pi}{1000}$	$v_c$	(m/min)	<b>Cutting speed</b>	SFM	(ft/min)
	$n$	(rev/min)	<b>Spindle speed</b>	RPM	(rev/min)
$n = \frac{v_c \times 1000}{DC \times \pi}$	$V_f$	(mm/min)	<b>Feed rate</b>	IPM	(in/min)
	$f_z$	(mm/tooth)	<b>Feed per tooth</b>	IPT	(in/tooth)
$V_f = f_z \times z \times n$	DC	(mm)	<b>Cutting diameter</b>	DC	(in)
$f_z = \frac{V_f}{z \times n}$	z	(-)	<b>Number of teeth</b>	T	(-)
$Q = \frac{V_f \times a_p \times a_e}{1000}$	$a_p$	(mm)	<b>Depth of cut</b>	DOC	(in)
	$a_e$	(mm)	<b>Width of cut</b>	WOC	(in)
	Q	(cm <sup>3</sup> /min)	<b>Metal removal rate</b>	MRR	(in <sup>3</sup> /min)

$$SFM = \frac{RPM \times DC \times \pi}{12}$$


$$RPM = \frac{SFM \times 12}{DC \times \pi}$$

$$IPM = IPT \times T \times RPM$$

$$IPT = \frac{IPM}{T \times RPM}$$

$$MRR = IPM \times DOC \times WOC$$

## SOLID HSS MILLS – FEED PER TOOTH TABLE

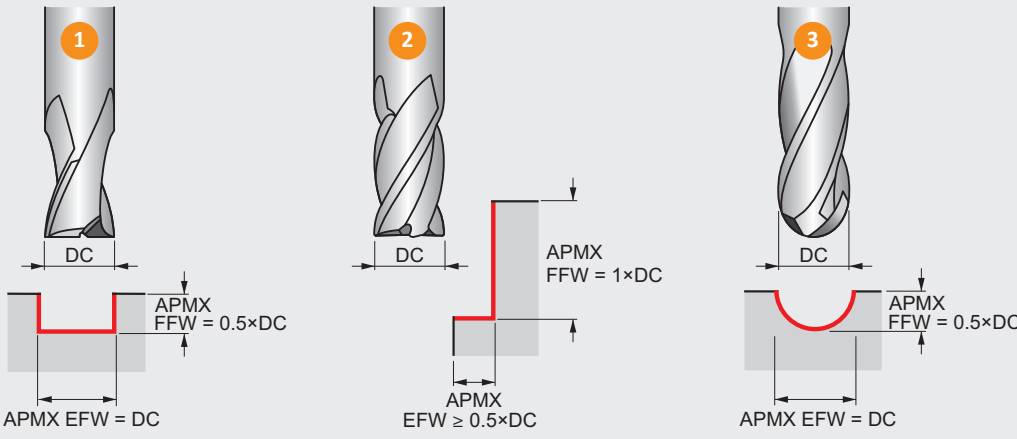

Feed per tooth *IPT* (inch/tooth) depending on the working conditions it might be necessary to adjust these values  $\pm 25\%$ .  
 ONLY if plunging into solid material with a centre cutting end mill the values in this table should be considered as *IPR* (feed in inch per revolution).

### How to use this table to find the feed per tooth *IPT*:

1. Find your Alpha Code on the product page (example: 157C, "C" is the Alpha Code).
2. Find the closest diameter for your cutting application in the top row of the table.
3. Find your Alpha Code in the left column of the table.
4. The intersection (cell) of the Diameter and Alpha Code is the feed per tooth *IPT*.

**FOR HSS,  
HSS-E AND  
HSS-E-PM MILLING  
CUTTERS ONLY**



		$\varnothing$ DC (inch)																		
		1/16	3/32	1/8	5/32	3/16	7/32	1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4	7/8	1	1 1/8	1 1/4	1 1/2
		.0625	.0938	.1250	.1563	.1875	.2188	.2500	.3125	.3750	.4375	.5000	.5625	.6250	.7500	.8750	1.0000	1.1250	1.2500	1.5000
Feed rates (mm/tooth)	A	.0001	.0001	.0001	.0002	.0002	.0002	.0002	.0003	.0004	.0004	.0005	.0006	.0006	.0007	.0008	.0009	.0011	.0012	.0013
	B	.0001	.0002	.0002	.0002	.0002	.0002	.0003	.0004	.0004	.0005	.0006	.0007	.0007	.0009	.0011	.0012	.0014	.0015	.0017
	C	.0002	.0002	.0002	.0003	.0003	.0003	.0004	.0004	.0005	.0006	.0007	.0008	.0009	.0011	.0013	.0015	.0017	.0019	.0020
	D	.0002	.0002	.0002	.0004	.0004	.0004	.0004	.0006	.0007	.0008	.0009	.0010	.0011	.0013	.0017	.0019	.0021	.0023	.0026
	E	.0002	.0003	.0003	.0004	.0005	.0005	.0006	.0007	.0008	.0010	.0011	.0013	.0014	.0017	.0020	.0023	.0027	.0029	.0032
	F	.0003	.0003	.0004	.0005	.0006	.0006	.0007	.0008	.0010	.0012	.0014	.0016	.0017	.0020	.0024	.0028	.0032	.0035	.0039
	G	.0004	.0004	.0005	.0006	.0007	.0007	.0008	.0009	.0012	.0014	.0017	.0019	.0020	.0024	.0030	.0033	.0039	.0042	.0046
	H	.0004	.0005	.0006	.0007	.0008	.0008	.0009	.0011	.0014	.0017	.0020	.0022	.0024	.0029	.0035	.0040	.0046	.0050	.0056
	I	.0005	.0006	.0007	.0009	.0010	.0010	.0011	.0014	.0017	.0020	.0024	.0027	.0030	.0035	.0043	.0048	.0056	.0060	.0067
	J	.0006	.0007	.0008	.0011	.0012	.0012	.0014	.0017	.0020	.0024	.0028	.0032	.0035	.0042	.0051	.0058	.0067	.0072	.0080

This table is valid for end mills and shell mills.

## SOLID HSS MILLS – CORRECTION FACTORS



### 1 Slot Milling

Correction factors for cutting speed  $v_c$  and feed per tooth  $f_z$  for slot milling operations at different depths of cut.

APMX FFW / DC	25 %	50 %	100 %	150 %
	1.25	1.00	0.75	0.50
	1.25	1.00	0.75	0.50

### 2 Shoulder Milling


Correction factors for cutting speed  $v_c$  and feed per tooth  $f_z$  for square shoulder milling with < 50 % radial immersion.

APMX EFW / DC	5 %	10 %	15 %	20 %	25 %	30 %	40 %	≥ 50 %
	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.00
	2.29	1.67	1.40	1.25	1.15	1.09	1.02	1.00

We recommend to avoid milling with 50 % radial immersion.


### 3a Plain Copy Milling (with Ball Nose Cutters)

Correction factors for cutting speed  $v_c$  for plain copy milling at different depths of cut.

APMX FFW / DC	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %
	2.29	1.67	1.40	1.25	1.15	1.09	1.02	1.00

### 3b


Line offset  $f_e$  (step-over distance) for achieving a theoretical surface roughness  $R_{th}$ .

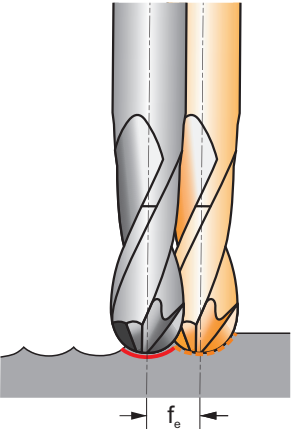DC	$\mu\text{m}$	2	4	8	16	32	63	125	250
2		0.13	0.18	0.25	0.36	0.50	0.70	0.97	1.32
3		0.15	0.22	0.31	0.44	0.62	0.86	1.20	1.66
4		0.18	0.25	0.36	0.50	0.71	1.00	1.39	1.94
5		0.20	0.28	0.40	0.56	0.80	1.12	1.56	2.18
6		0.22	0.31	0.44	0.62	0.87	1.22	1.71	2.40
8		0.25	0.36	0.51	0.71	1.01	1.41	1.98	2.78
10		0.28	0.40	0.57	0.80	1.13	1.58	2.22	3.12
12		0.31	0.44	0.62	0.88	1.24	1.73	2.44	3.43
14		0.33	0.47	0.67	0.95	1.34	1.87	2.63	3.71
16		0.36	0.51	0.72	1.01	1.43	2.00	2.82	3.97
18		0.38	0.54	0.76	1.07	1.52	2.13	2.99	4.21
20		0.40	0.57	0.80	1.13	1.60	2.24	3.15	4.44
22		0.42	0.59	0.84	1.19	1.68	2.35	3.31	4.66
25	0.45	0.63	0.89	1.26	1.79	2.51	3.53	4.97	
28	0.47	0.67	0.95	1.34	1.89	2.65	3.73	5.27	

Line offset dimensions shown are Metric (mm) only.

## SOLID HSS MILLS – CORRECTION FACTORS

3c

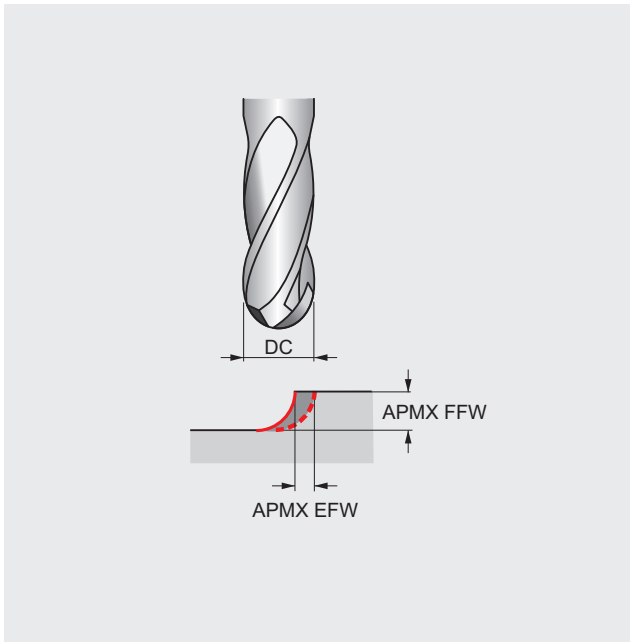


### How to use this table to find the correction factor for the feed per tooth ( $f_z$ or IPT) for plain copy milling:

1. Find the closest radial immersion ( $a_e / DC$ ) for your cutting application in the top row of the table.
3. Find your closest axial immersion ( $a_p / DC$ ) for your cutting application in the left column of the table.
4. The intersection (cell) of the radial and axial immersions is the correction factor for the feed per tooth.

### Example for plain copy milling:


1. Applying an 8 mm ball nose cutter with a depth of cut of 0.8 mm ( $a_p$ ), the aim is to achieve a theoretical surface roughness of 32  $\mu\text{m}$ .
2. The correction factor for cutting speed with an axial immersion of 10% = 1.67 can be found in table 3a.
3. The step-over distance for a  $R_{th}$  of 32  $\mu\text{m}$  = 1.01 mm can be found in table 3b.
4. The correction factor for feed per tooth with an axial immersion of 10% and a radial immersion of  $1.01 / 8 = 12.6\%$  can be found in table 3c and is in this case 2.33.

Correction factors for feed per tooth  $f_z$  for plain copy milling with a line offset  $< 50\% \times DC$  at different of depths of cut.

APMX FFW	APMX EFW	5%	10%	15%	20%	25%	30%	35%	40%	50%
5%	$\times f$ 	5.26	3.82	3.21	2.87	2.65	2.50	2.40	2.34	2.29
10%		3.82	2.78	2.33	2.08	1.92	1.82	1.75	1.70	1.67
15%		3.21	2.33	1.96	1.75	1.62	1.53	1.47	1.43	1.40
20%		2.87	2.08	1.75	1.56	1.44	1.36	1.31	1.28	1.25
25%		2.65	1.92	1.62	1.44	1.33	1.26	1.21	1.18	1.15
30%		2.50	1.82	1.53	1.36	1.26	1.19	1.14	1.11	1.09
35%		2.40	1.75	1.47	1.31	1.21	1.14	1.10	1.07	1.05
40%		2.34	1.70	1.43	1.28	1.18	1.11	1.07	1.04	1.02
45%		2.31	1.68	1.41	1.26	1.16	1.10	1.05	1.03	1.01
50%		2.29	1.67	1.40	1.25	1.15	1.09	1.05	1.02	1.00

To increase the surface quality, the tool or surface should be included with a tilt angle of 10°–15°.

## SOLID HSS MILLS – FEED PER TOOTH TABLE

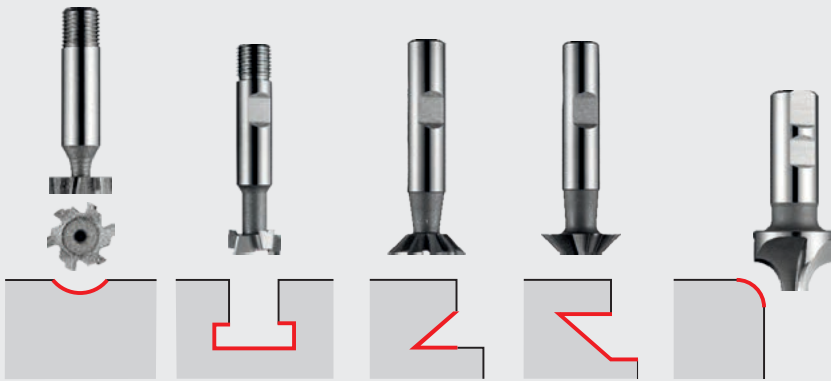

Feed per tooth  $f_z$  (mm).  
Depended of the working conditions it might be needed to adjust these values  $\pm 25\%$ .

- How to use this table to find the feed per tooth  $f_z$ :**
1. Find your Alpha Code on the product page (example: 40V, "V" is the Alpha Code).
  2. Find the closest diameter for your cutting application in the top row of the table.
  3. Find your Alpha Code in the left column of the table.
  4. The intersection (cell) of the diameter and Alpha Code is the feed per tooth  $f_z$ .

Feed rates for mills: C800, C801, C810, C820, C822, C825, C830, C835, C837, C831, C700, C710, D745, D747, D750, D751, D752, D753, D200, D763.

		$\phi$ DC (mm)															
		10.0	12.0	16.0	20.0	25.0	32.0	38.0	50.0	63.0	80.0	100.0	125.0	160.0	200.0	300.0	350.0
Feed rates (mm)	P	–	–	–	–	–	0.200	–	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200
	Q	–	–	–	–	–	0.040	–	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040
	R	–	–	–	–	–	0.600	–	0.600	0.600	0.600	0.600	0.600	0.600	0.600	0.600	0.600
	S	0.020	0.020	0.020	0.040	0.040	0.040	0.040	0.050	0.050	0.060	0.070	0.080	0.090	0.100	0.100	0.100
	T	0.020	0.020	0.030	0.050	0.050	0.050	0.060	0.060	0.060	–	–	–	–	–	–	–
	U	0.030	0.030	0.030	0.050	0.060	0.060	0.060	0.060	0.060	–	–	–	–	–	–	–
	V	0.030	0.030	0.040	0.060	0.060	0.060	0.070	0.070	0.070	0.080	0.090	0.100	0.110	0.120	0.120	0.120
	W	0.040	0.050	0.050	0.060	0.060	0.070	0.070	0.070	0.070	0.090	0.100	0.110	0.110	0.120	0.120	0.120
	X	0.050	0.050	0.060	0.070	0.080	0.100	0.110	0.110	0.110	0.110	0.110	0.120	0.130	0.140	0.140	0.140
	Y	0.060	0.060	0.070	0.090	0.100	0.110	0.130	0.130	–	–	–	–	–	–	–	–
Z	0.070	0.070	0.090	0.110	0.120	0.110	0.150	–	–	–	–	–	–	–	–	–	

Feeds  $f_z$  shown are Metric (mm) only.

## SOLID HSS SLITTING SAWS – TOOTH PITCH CHOICE TABLES

Tooth pitch choices for slitting saws D750, D751, D752, D753


		Solid section									
		Saw Pitch (P)									
		2.5	3	4	5	6	8				
Diameter $t$	4		P	M	N	K					
	6			P	M	N	K				
	8				P	M	N	K			
	10					P	M	N	K		
	15						P	M	N	K	
	20							P	M	N	K
	30								P	M	
	40									P	M

P ISO P = Steel Workpiece Material Group (WMG)  
M ISO M = Stainless Steel Workpiece Material Group (WMG)

		Profiles and Tubes							
		Saw Pitch (P)							
		2.5	3	4	5	6	8		
Wall Thickness $t$	1		P	M	N	K			
	1.5			P	M	N	K		
	2				P	M	N	K	
	3					P	M	N	K
	> 4						P	M	N

K ISO K = Cast Iron Workpiece Material Group (WMG)  
N ISO N = Non Ferrous Workpiece Material Group (WMG)

## SOLID HM MILLS – FEED PER TOOTH TABLE

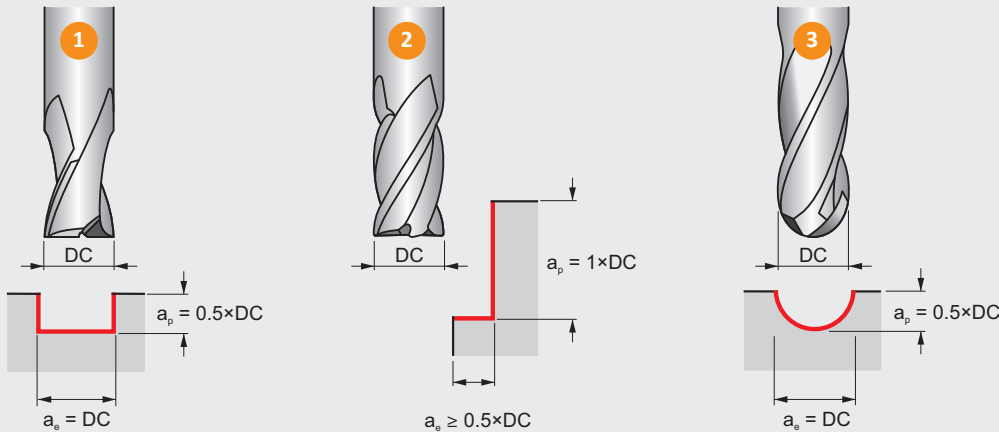

Feed per tooth  $f_z$  (mm) depending on the working conditions it might be necessary to adjust these values  $\pm 25\%$ .  
 ONLY if plunging into solid material with a centre cutting end mill the values in this table should be considered as  $f_n$  (feed per revolution).

### How to use this table to find the feed per tooth $f_z$ :


1. Find your Alpha Code on the product page (example: 199K, "K" is the Alpha Code).
2. Find the closest diameter for your cutting application in the top row of the table.
3. Find your Alpha Code in the left column of the table.
4. The intersection (cell) of the Diameter and Alpha Code is the feed per tooth  $f_z$ .

**FOR SOLID CARBIDE MILLING CUTTERS ONLY**

		$\varnothing$ DC (mm)																
		1.00	2.00	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0	25.0
Feed rates (mm)	A	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.011	0.014	0.015	0.017	0.019	0.021	0.025	0.028
	B	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.011	0.014	0.015	0.017	0.019	0.021	0.025	0.028
	C	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.011	0.014	0.015	0.017	0.019	0.021	0.025	0.028
	D	0.002	0.003	0.004	0.005	0.007	0.008	0.009	0.010	0.011	0.012	0.014	0.015	0.017	0.019	0.021	0.025	0.028
	E	0.002	0.003	0.004	0.008	0.009	0.012	0.013	0.014	0.015	0.016	0.019	0.021	0.024	0.026	0.028	0.030	0.034
	F	0.002	0.003	0.006	0.010	0.013	0.016	0.017	0.019	0.021	0.022	0.026	0.029	0.032	0.035	0.039	0.042	0.047
	G	0.002	0.005	0.008	0.014	0.018	0.022	0.024	0.026	0.028	0.031	0.035	0.040	0.044	0.048	0.053	0.057	0.064
	I	0.003	0.006	0.011	0.019	0.024	0.030	0.032	0.036	0.039	0.042	0.049	0.054	0.061	0.066	0.073	0.079	0.088
	J	0.004	0.009	0.014	0.026	0.033	0.041	0.044	0.048	0.053	0.057	0.066	0.074	0.083	0.090	0.099	0.107	0.120
	K	0.006	0.012	0.019	0.035	0.044	0.054	0.059	0.064	0.070	0.076	0.088	0.098	0.110	0.120	0.132	0.142	0.160
	N	0.008	0.016	0.025	0.047	0.058	0.072	0.078	0.086	0.094	0.101	0.117	0.131	0.146	0.160	0.175	0.189	0.212
	O	0.010	0.021	0.034	0.062	0.078	0.096	0.104	0.114	0.124	0.135	0.156	0.174	0.195	0.213	0.233	0.252	0.283
	P	0.014	0.028	0.045	0.083	0.104	0.128	0.138	0.152	0.166	0.180	0.207	0.231	0.259	0.283	0.311	0.335	0.376
	R	0.018	0.037	0.060	0.110	0.138	0.170	0.184	0.202	0.221	0.239	0.276	0.308	0.345	0.377	0.414	0.446	0.501
	S	0.024	0.049	0.080	0.147	0.183	0.226	0.245	0.269	0.294	0.318	0.367	0.410	0.459	0.502	0.550	0.593	0.667

Formulas (Metric)		Terms		Formulas (Imperial)	
$v_c = \frac{n \times DC \times \pi}{1000}$	$v_c$	(m/min)	<b>Cutting speed</b>	SFM	(ft/min)
	$n$	(rev/min)	<b>Spindle speed</b>	RPM	(rev/min)
$n = \frac{v_c \times 1000}{DC \times \pi}$	$V_f$	(mm/min)	<b>Feed rate</b>	IPM	(in/min)
	$f_z$	(mm/tooth)	<b>Feed per tooth</b>	IPT	(in/tooth)
$V_f = f_z \times z \times n$	DC	(mm)	<b>Cutting diameter</b>	DC	(in)
$f_z = \frac{V_f}{z \times n}$	z	(-)	<b>Number of teeth</b>	T	(-)
$Q = \frac{V_f \times a_p \times a_e}{1000}$	$a_p$	(mm)	<b>Depth of cut</b>	DOC	(in)
	$a_e$	(mm)	<b>Width of cut</b>	WOC	(in)
	Q	(cm <sup>3</sup> /min)	<b>Metal removal rate</b>	MRR	(in <sup>3</sup> /min)
				$SFM = \frac{RPM \times DC \times \pi}{12}$ $RPM = \frac{SFM \times 12}{DC \times \pi}$ $IPM = IPT \times T \times RPM$ $IPT = \frac{IPM}{T \times RPM}$ $MRR = IPM \times DOC \times WOC$	

## SOLID HM MILLS – FEED PER TOOTH TABLE

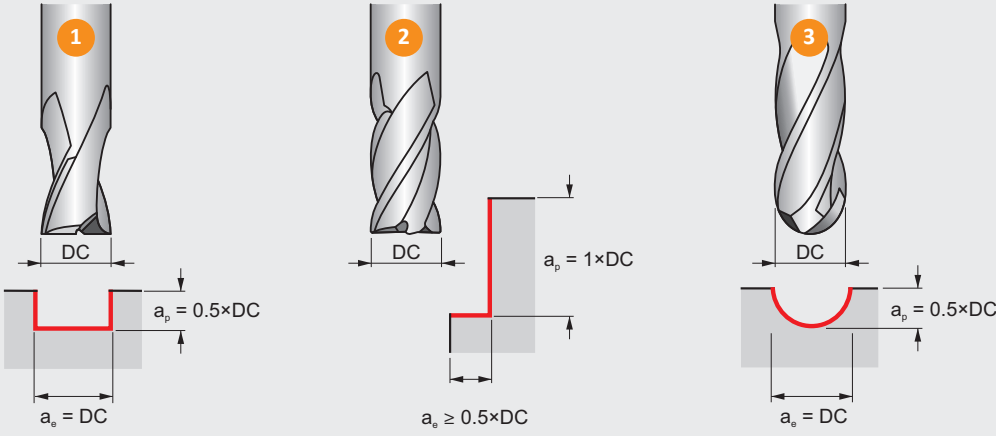

Feed per tooth *IPT* or (inch) depending on the working conditions it might be necessary to adjust these values  $\pm 25\%$ .  
 ONLY if plunging into solid material with a centre cutting end mill the values in this table should be considered as *IPR* (feed in inch per revolution).

### How to use this table to find the feed per tooth *IPT*:

1. Find your Alpha Code on the product page (example: 653K, "K" is the Alpha Code).
2. Find the closest diameter for your cutting application in the top row of the table.
3. Find your Alpha Code in the left column of the table.
4. The intersection (cell) of the Diameter and Alpha Code is the feed per tooth *IPT*.



**FOR SOLID CARBIDE MILLING CUTTERS ONLY**

		$\phi$ DC (inch)															
		1/16	3/32	1/8	5/32	3/16	7/32	1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4	7/8	1
		.0625	.0938	.1250	.1563	.1875	.2188	.2500	.3125	.3750	.4375	.5000	.5625	.6250	.7500	.8750	1.0000
Feed rates (inch)	A	.0001	.0001	.0002	.0002	.0002	.0002	.0003	.0003	.0004	.0005	.0005	.0006	.0007	.0008	.0010	.0011
	B	.0001	.0001	.0002	.0002	.0002	.0002	.0003	.0003	.0004	.0005	.0005	.0006	.0007	.0008	.0010	.0011
	C	.0001	.0001	.0002	.0002	.0002	.0002	.0003	.0003	.0004	.0005	.0005	.0006	.0007	.0008	.0010	.0011
	D	.0001	.0001	.0002	.0002	.0002	.0003	.0004	.0004	.0004	.0005	.0006	.0006	.0007	.0008	.0010	.0011
	E	.0001	.0001	.0002	.0003	.0004	.0004	.0005	.0006	.0006	.0007	.0007	.0009	.0009	.0011	.0012	.0013
	F	.0001	.0002	.0002	.0004	.0005	.0006	.0006	.0007	.0009	.0009	.0011	.0012	.0013	.0015	.0017	.0019
	G	.0002	.0002	.0004	.0006	.0007	.0007	.0009	.0010	.0012	.0013	.0015	.0016	.0017	.0020	.0023	.0025
	I	.0002	.0003	.0005	.0007	.0009	.0011	.0012	.0014	.0016	.0018	.0020	.0022	.0024	.0028	.0031	.0035
	J	.0003	.0004	.0007	.0010	.0012	.0014	.0017	.0019	.0022	.0024	.0027	.0030	.0032	.0037	.0043	.0047
	K	.0004	.0006	.0009	.0014	.0016	.0019	.0022	.0025	.0029	.0032	.0036	.0040	.0043	.0050	.0056	.0063
	N	.0005	.0007	.0011	.0019	.0022	.0025	.0029	.0034	.0038	.0043	.0048	.0053	.0057	.0066	.0075	.0083
	O	.0006	.0010	.0015	.0024	.0029	.0034	.0039	.0045	.0051	.0057	.0063	.0070	.0076	.0088	.0100	.0111
	P	.0008	.0014	.0020	.0033	.0038	.0045	.0052	.0060	.0068	.0076	.0084	.0094	.0100	.0117	.0133	.0148
	R	.0011	.0018	.0027	.0043	.0051	.0060	.0069	.0080	.0091	.0101	.0112	.0125	.0134	.0156	.0177	.0197
	S	.0015	.0024	.0036	.0058	.0067	.0080	.0091	.0106	.0120	.0135	.0149	.0166	.0178	.0207	.0236	.0263

## SOLID HM MILLS – CORRECTION FACTORS



### 1 Slot Milling

Correction factors for cutting speed  $v_c$  and feed per tooth  $f_z$  for slot milling operations at different depths of cut.

$a_p / DC$	25 %	50 %	100 %	150 %
	1.25	1.00	0.75	0.50
	1.25	1.00	0.75	0.50

### 2 Shoulder Milling


Correction factors for cutting speed  $v_c$  and feed per tooth  $f_z$  for square shoulder milling with < 50 % radial immersion.

$a_e / DC$	5 %	10 %	15 %	20 %	25 %	30 %	40 %	≥ 50 %
	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.00
	2.29	1.67	1.40	1.25	1.15	1.09	1.02	1.00

We recommend to avoid milling with 50 % radial immersion.


### 3a Plain Copy Milling (with Ball Nose Cutters)

Correction factors for cutting speed  $v_c$  for plain copy milling at different depths of cut.

$a_p / DC$	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %
	2.29	1.67	1.40	1.25	1.15	1.09	1.02	1.00

### 3b


Line offset  $f_e$  (step-over distance) for achieving a theoretical surface roughness  $R_{th}$ .

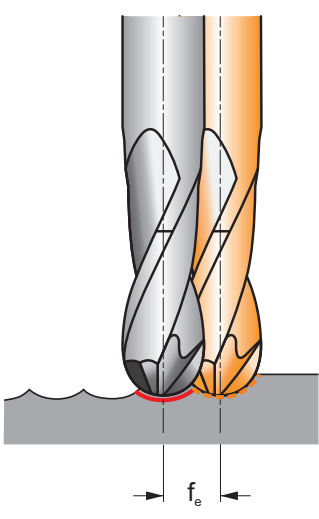$DC$	$\mu m$	2	4	8	16	32	63	125	250
2		0.13	0.18	0.25	0.36	0.50	0.70	0.97	1.32
3		0.15	0.22	0.31	0.44	0.62	0.86	1.20	1.66
4		0.18	0.25	0.36	0.50	0.71	1.00	1.39	1.94
5		0.20	0.28	0.40	0.56	0.80	1.12	1.56	2.18
6		0.22	0.31	0.44	0.62	0.87	1.22	1.71	2.40
8		0.25	0.36	0.51	0.71	1.01	1.41	1.98	2.78
10		0.28	0.40	0.57	0.80	1.13	1.58	2.22	3.12
12		0.31	0.44	0.62	0.88	1.24	1.73	2.44	3.43
14		0.33	0.47	0.67	0.95	1.34	1.87	2.63	3.71
16		0.36	0.51	0.72	1.01	1.43	2.00	2.82	3.97
18		0.38	0.54	0.76	1.07	1.52	2.13	2.99	4.21
20		0.40	0.57	0.80	1.13	1.60	2.24	3.15	4.44
22		0.42	0.59	0.84	1.19	1.68	2.35	3.31	4.66
25		0.45	0.63	0.89	1.26	1.79	2.51	3.53	4.97
28	0.47	0.67	0.95	1.34	1.89	2.65	3.73	5.27	

Line offset dimensions shown are Metric (mm) only.

## SOLID HM MILLS – CORRECTION FACTORS

3c

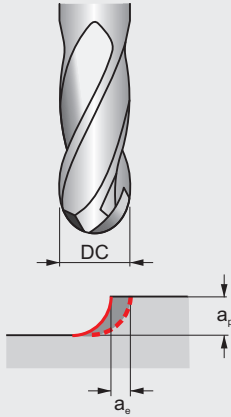


### How to use this table to find the correction factor for the feed per tooth ( $f_z$ or IPT) for plain copy milling:

1. Find the closest radial immersion ( $a_e / DC$ ) for your cutting application in the top row of the table.
2. Find your closest axial immersion ( $a_p / DC$ ) for your cutting application in the left column of the table.
3. The intersection (cell) of the radial and axial immersions is the correction factor for the feed per tooth.

### Example for plain copy milling:


1. Applying an 8 mm ball nose cutter with a depth of cut of 0.8 mm ( $a_p$ ), the aim is to achieve a theoretical surface roughness of 32  $\mu\text{m}$ .
2. The correction factor for cutting speed with an axial immersion of 10% = 1.67 can be found in table 3a.
3. The step-over distance for a  $R_{th}$  of 32  $\mu\text{m}$  = 1.01 mm can be found in table 3b.
4. The correction factor for feed per tooth with an axial immersion of 10% and a radial immersion of 1.01 / 8 = 12.6% can be found in table 3c and is in this case 2.33.

Correction factors for feed per tooth  $f_z$  for plain copy milling with a line offset < 50%  $\times$  DC at different of depths of cut.

APMX FFW	APMX EFW	5 %	10 %	15 %	20 %	25 %	30 %	35 %	40 %	50 %
5 %	$\times \cdot f$ 	5.26	3.82	3.21	2.87	2.65	2.50	2.40	2.34	2.29
10 %		3.82	2.78	2.33	2.08	1.92	1.82	1.75	1.70	1.67
15 %		3.21	2.33	1.96	1.75	1.62	1.53	1.47	1.43	1.40
20 %		2.87	2.08	1.75	1.56	1.44	1.36	1.31	1.28	1.25
25 %		2.65	1.92	1.62	1.44	1.33	1.26	1.21	1.18	1.15
30 %		2.50	1.82	1.53	1.36	1.26	1.19	1.14	1.11	1.09
35 %		2.40	1.75	1.47	1.31	1.21	1.14	1.10	1.07	1.05
40 %		2.34	1.70	1.43	1.28	1.18	1.11	1.07	1.04	1.02
45 %		2.31	1.68	1.41	1.26	1.16	1.10	1.05	1.03	1.01
50 %		2.29	1.67	1.40	1.25	1.15	1.09	1.05	1.02	1.00

To increase the surface quality, the tool or surface should be included with a tilt angle off 10° – 15°.

## SOLID HM BARREL-SHAPE MILL – FEED PER TOOTH TABLE

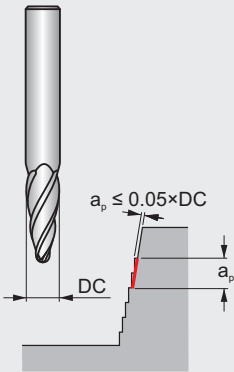

Feed per tooth  $f_z$  (mm) depended on the working conditions it might be needed to adjust these values  $\pm 25\%$ .

### How to use this table to find the feed per tooth $f_z$ :

1. Find your Alpha Code on the product page (example: 121F, "F" is the Alpha Code).
2. Find the closest diameter for your cutting application in the top row of the table.
3. Find your Alpha Code in the left column of the table.
4. The intersection (cell) of the Diameter and Alpha Code is the feed per tooth  $f_z$ .

**FOR HM S791  
BARREL-SHAPE MILLS ONLY**

		$\varnothing$ DC (mm)				
		6.00	8.00	10.00	12.00	16.00
Feed rates (mm)	E	0.030	0.039	0.053	0.067	0.096
	F	0.037	0.050	0.064	0.083	0.118
	I	0.062	0.084	0.111	0.141	0.203

## THREAD MILLS – GENERAL HINTS

### General hints on thread milling


1. Thread milling is the process of generating a thread by the circular interpolation of a milling cutter with a specific thread geometry ground around its periphery.
2. To be able to use a thread milling cutter it is necessary to have a CNC machine that can make circular paths.
3. Most modern CNC machines are equipped with machining cycles for thread milling.
4. Consult the manual or contact the machine supplier for information.

### Features and benefits

1. Thread milling gives increased reliability and tool life.
2. Threadmills produce small chips resulting in problem free threading.
3. Tolerance adjustments can be made using exact co-ordinates.
4. You can generate a complete thread to the bottom of the hole.
5. Capable of machining a wide variety of materials.
6. The same cutter can produce different size threads provided the pitch is the same.
7. Both right and left hand threads can be created with the same tool.
8. Some thread mills can also machine the entry chamfer (J200 and J205).

### Choosing your tool

Thread milling cutters have an item code based on the type, diameter *DC* and pitch *TP*. The item code is the number to use when ordering your tool. Always consult the catalogue to ensure you have the correct thread dimensions.

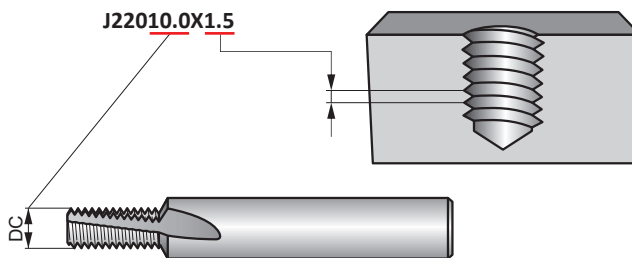

This thread milling cutter can be used for threads  $\geq$  M12 $\times$ 1.5 (M14 $\times$ 1.5, M18 $\times$ 1.5 etc.)

### Programming with Rprg


- For easy adjustment of the thread tolerance always program with radius correction.
- The Rprg value is the start value for a new cutter and is printed on the cutter shank. This should be entered in the tool memory offset.
- Rprg is based on the theoretical zero-line of the thread meaning that when you program using Rprg the thread is never oversize, but normally tight.
- This means that with a small modification to the program co-ordinates you can create the thread to the required size.

### Recommendations

- Always use the correct cutting data.
- Use the recommended drill size for the thread diameter, as for conventional taps.
- For easy adjustment of the thread tolerance always start with the Rprg value printed on the shank of the threadmill.
- Use a gauge to check the tolerance on the first thread to establish if the radius needs to be corrected. The radius can be corrected 2 or 3 times before the threadmill is worn out.
- When dry machining, compressed air is recommended to help with swarf removal.
- When threading more difficult materials, it is recommended to take multiple passes.




## THREAD MILLS – NUMBER OF PASSES TABLE

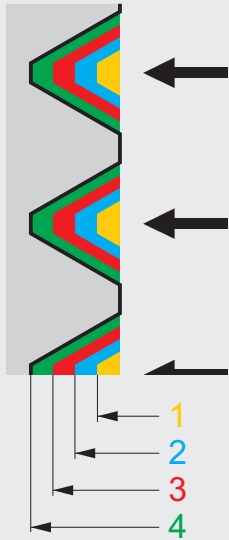


- How to use the tables to find the depth increments per pass:**
1. Select the table for your thread profile (example: "M12" is a metric thread).
  2. Find the column matching your thread pitch in the top row of the table.
  3. Find in that column below the recommended number of passes and for each pass the increment radial depth of cut. (example: for a pitch of 1.75 the recommended number of passes is 5 and radial depth of the 1st pass is 0.277 mm, the 2nd 0.228 mm etc.).
  4. It is recommended to increase the number of passes for more difficult to machine materials.
  5. For super-finishing result it is best practice to repeat the final pass.

Recommended number of passes and radial depth of cut per pass for female metric thread (60°).


		Radial depth of cut per pass (mm)										
		0.50	0.70	0.75	0.80	1.00	1.25	1.50	1.75	2.00	2.50	3.00
No. of passes	1	0.158	0.221	0.168	0.224	0.224	0.228	0.237	0.277	0.283	0.323	0.387
	2	0.131	0.183	0.138	0.185	0.185	0.188	0.196	0.228	0.234	0.267	0.320
	3	–	–	0.127	0.135	0.168	0.173	0.179	0.209	0.214	0.244	0.293
	4	–	–	–	–	–	0.133	0.138	0.161	0.164	0.187	0.225
	5	–	–	–	–	–	–	0.116	0.135	0.138	0.158	0.189
	6	–	–	–	–	–	–	–	–	0.122	0.139	0.167
	7	–	–	–	–	–	–	–	–	–	0.125	0.151
Acc. depth		0.289	0.404	0.433	0.544	0.577	0.722	0.866	1.010	1.155	1.443	1.732

Recommended number of passes and radial depth of cut per pass for female unified thread (60°).


		Radial depth of cut per pass (mm)									
		28	24	20	18	16	14	13	12	11	10
No. of passes	1	0.203	0.237	0.232	0.258	0.251	0.287	0.309	0.299	0.327	0.328
	2	0.167	0.195	0.191	0.213	0.207	0.237	0.255	0.247	0.270	0.271
	3	0.154	0.179	0.175	0.195	0.190	0.217	0.234	0.226	0.247	0.248
	4	–	–	0.135	0.149	0.146	0.166	0.179	0.174	0.189	0.190
	5	–	–	–	–	0.123	0.140	0.151	0.146	0.160	0.160
	6	–	–	–	–	–	–	–	0.130	0.140	0.141
	7	–	–	–	–	–	–	–	–	–	0.128
Acc. Depth		0.524	0.611	0.733	0.815	0.917	1.047	1.128	1.222	1.333	1.466

**THREAD MILLS – NUMBER OF PASSES TABLE**

Recommended number of passes and radial depth of cut per pass for female G (BSP) thread (55°).

 1"	Radial depth of cut per pass (mm)				
	28	19	14	11	
No. of passes	1	0.225	0.271	0.318	0.362
	2	0.186	0.224	0.263	0.299
	3	0.170	0.205	0.241	0.274
	4	–	0.156	0.185	0.210
	5	–	–	0.155	0.177
	6	–	–	–	0.157
	7	–	–	–	–
Acc. Depth	0.581	0.856	1.162	1.479	

Recommended number of passes and radial depth of cut per pass for female NPT thread (60°).

 1"	Radial depth of cut per pass (mm)				
	27	18	14	11.5	
No. of passes	1	0.283	0.348	0.390	0.423
	2	0.233	0.287	0.322	0.349
	3	0.214	0.263	0.295	0.320
	4	–	0.202	0.226	0.246
	5	–	–	0.190	0.207
	6	–	–	–	0.183
	7	–	–	–	–
Acc. Depth	0.730	1.100	1.423	1.728	


## ROTARY BURRS – GENERAL HINTS

### General hints on carbide burrs

Carbide Burrs are widely used for preparing and finishing components in a wide range of materials. They are generally used by hand and mounted in air driven die-grinders.

### Construction and Geometry

1. Toughened and hardened steel shanks improve rigidity and reduce the risk of bending or vibration.
2. Accurately ground shanks improve holding and reduce likelihood of spinning.
3. Special brazing elements prevent high temperature failure and also provide increased strength to withstand pressure and impact.
4. The universal Double Cut (DC) geometry is suitable for a wide range of materials and applications.
5. Material specific geometries are also available suited to Steel (ST), Stainless Steel (VA), Aluminium (AL), Super Alloys (AS) and Fibreglass (GRP).
6. Available with TiAlN coating to increase tool life in abrasive materials.
7. Ball nose burrs are ground with Skip Flute geometry. This provides active geometry towards the centre of the burr, improving the cutting action and reducing the chances of swarf build up and clogging.

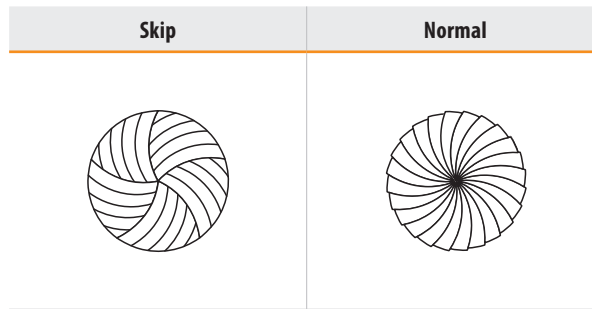

### Safety first

1. High speed rotating tools are hazardous and can be dangerous if miss-used.
2. Always disconnect the die grinder from the air supply before attempting to change the burrs.
3. Check the condition of the die grinder and if possible use low vibration versions.
4. Always use the appropriate protective equipment and ensure anyone working close by is also protected.



**Personal protective equipment must be worn at all times!**

## ROTARY BURRS – GENERAL HINTS

### Recommendations

- Always use the appropriate speed rated die grinder.
- Routine maintenance of die grinders is important, ensure they are oiled and bearings are not worn.
- Always clean the clamping nut, collet and internal taper of the die grinder when changing a burr.
- Try to avoid mechanical shock and heavy impact of the burrs.
- Try to avoid thermal shock by not allowing the burr to become overheated.
- Don't plunge the burr too deep into the workpiece material or jam the bur into corners or channels.

### Trouble shooting using burrs

Problem	Cause
<b>Chipping of Burr Teeth</b>	Running speed too low (revolutions per minute) can cause bouncing (chatter)
	Eccentricity (worn spindle, collet or bearings)
	Plunging and jamming the burr into the workpiece
<b>Clogging of Burr Teeth</b>	Flute length or overall length too long
	Incorrect geometry choice for workpiece material
<b>Premature Wear</b>	Running speed too high (revolutions per minute) for size of burr and workpiece material
	Eccentricity (worn spindle, collet or bearings)
<b>Head Detaches from Shank</b>	Running speed too high (revolutions per minute) causing overheating
	Running for prolonged periods causing overheating

## ROTARY BURRS – RECOMMENDED OPERATING SPEED

		RPM						
		DC (mm)						
		3	6	8	10	12	16	20
<b>AL</b>	<b>DC</b>							
<b>P</b>	min.	64 000	32 000	24 000	20 000	16 000	12 000	10 000
	max.	83 000	42 000	32 000	25 000	21 000	16 000	13 000
<b>M</b>	min.	45 000	23 000	17 000	14 000	12 000	9 000	7 000
	max.	64 000	32 000	24 000	20 000	16 000	12 000	10 000
<b>K</b>	min.	58 000	29 000	22 000	19 000	15 000	11 000	9 000
	max.	77 000	39 000	29 000	23 000	20 000	15 000	12 000
<b>N</b>	min.	64 000	32 000	24 000	20 000	16 000	12 000	10 000
	max.	96 000	48 000	36 000	29 000	24 000	18 000	15 000
<b>S</b>	min.	45 000	23 000	17 000	14 000	12 000	9 000	7 000
	max.	58 000	29 000	22 000	18 000	15 000	11 000	9 000
<b>H</b>	min.	51 000	26 000	20 000	16 000	13 000	10 000	8 000
	max.	71 000	36 000	27 000	22 000	18 000	14 000	11 000

		RPM				
		DC (mm)				
		3	6	8	10	12
<b>ST</b>	<b>BR</b>					
<b>P</b>	min.	100 000	65 000	60 000	55 000	35 000
	max.	60 000	45 000	35 000	30 000	20 000

		RPM				
		DC (mm)				
		3	6	8	10	12
<b>VA</b>	<b>BR</b>					
<b>M</b>	min.	100 000	65 000	60 000	55 000	35 000
	max.	60 000	30 000	25 000	20 000	15 000

		RPM			
		DC (mm)			
		3	6	8	
<b>GRP</b>	<b>N4</b>	min.	25 000	20 000	18 000
		max.	30 000	25 000	22 000

		RPM	
		DC (mm)	
		3	
<b>AS</b>	<b>S</b>	min.	60 000
		max.	80 000

## WMG (WORK MATERIAL GROUP)

ISO group	WMG (Work Material Group)	Hardness (HB or HRC)	Ultimate Tensile Strength (MPa)	
P	P1 P1.1 Free machining steel P1.2 (carbon steels with increased machinability) P1.3	Sulfurized	< 240 HB	≤ 830
		Sulfurized and phosphorized	< 180 HB	≤ 620
		Sulfurized/phosphorized and leaded	< 180 HB	≤ 620
	P2 P2.1 Plain carbon steel P2.2 (steels comprised of mainly iron and carbon) P2.3	Containing <0.25 % C	< 180 HB	≤ 620
		Containing <0.55 % C	< 240 HB	≤ 830
		Containing >0.55 % C	< 300 HB	≤ 1030
	P3 P3.1 Alloy steel P3.2 (carbon steels with an alloying content ≤ 10%) P3.3	Annealed	< 180 HB	≤ 620
		Hardened and tempered	180 – 260 HB	> 620 ≤ 900
			260 – 360 HB	> 900 ≤ 1240
	P4 P4.1 Tool steel P4.2 (special alloy steel for tools, dies and molds) P4.3	Annealed	< 26 HRC	≤ 900
Hardened and tempered		26 – 39 HRC	> 900 ≤ 1240	
		39 – 45 HRC	> 1240 ≤ 1450	
M	M1 M1.1 Ferritic stainless steel M1.2 (straight chromium non-hardenable alloys)	Annealed	< 160 HB	≤ 520
		160 – 220 HB	> 520 ≤ 700	
	M2 M2.1 Martensitic stainless steel M2.2 (straight chromium hardenable alloys) M2.3	Quenched and tempered	200 – 280 HB	> 670 ≤ 950
		Precipitation-hardened	280 – 380 HB	> 950 ≤ 1300
			< 200 HB	≤ 750
	M3 M3.1 Austenitic stainless steel M3.2 (chromium-nickel and chromium-nickel-manganese alloys) M3.3	200 – 260 HB	> 750 ≤ 870	
		260 – 300 HB	> 870 ≤ 1040	
		< 300 HB	≤ 990	
	M4 M4.1 Austenitic-ferritic (DUPLEx) or super-austenitic stainless steel M4.2 Precipitation hardening austenitic stainless steel	300 – 380 HB	≤ 1320	
K	K1 K1.1 Gray iron or Automotive Gray iron (GG) K1.2 (iron-carbon castings with a lamellar graphite microstructure) K1.3	Ferritic or ferritic-pearlitic	< 180 HB	≤ 190
		Ferritic-pearlitic or pearlitic	180 – 240 HB	> 190 ≤ 310
		Pearlitic	240 – 280 HB	> 310 ≤ 390
	K2 K2.1 Malleable iron (GTS/GTW) K2.2 (iron-carbon castings with a graphite-free microstructure) K2.3	Ferritic	< 160 HB	≤ 400
		Ferritic or pearlitic	160 – 200 HB	> 400 ≤ 550
		Pearlitic	200 – 240 HB	> 550 ≤ 660
	K3 K3.1 Ductile iron (GGG) K3.2 (iron-carbon castings with a nodular graphite microstructure) K3.3	Ferritic	< 180 HB	≤ 560
		Ferritic or pearlitic	180 – 220 HB	> 560 ≤ 680
		Pearlitic	220 – 260 HB	> 680 ≤ 800
	K4 K4.1 Austenitic gray iron (ASTM A436) K4.2 (iron-carbon alloy castings with an austenitic lamellar graphite microstructure) K4.3 Austenitic ductile iron (ASTM A439 or ASTM A571) K4.4 (iron-carbon alloy castings with an austenitic nodular graphite microstructure) K4.5	< 180 HB	≤ 190	
		< 240 HB	≤ 740	
		< 280 HB	> 840 ≤ 980	
		280 – 320 HB	> 980 ≤ 1130	
		320 – 360 HB	> 1130 ≤ 1280	
	K5 K5.1 Compacted graphite iron CGI (ASTM A842) K5.2 (iron-carbon castings with a vermicular graphite structure) K5.3	Ferritic	< 180 HB	≤ 400
Ferritic-pearlitic		180 – 220 HB	> 400 ≤ 450	
Pearlitic		220 – 260 HB	> 450 ≤ 500	
N	N1 N1.1 Commercially pure wrought aluminium N1.2 Wrought aluminium alloys N1.3	Half hard tempered	60 – 100 HB	> 240 ≤ 400
		Full hard tempered	100 – 150 HB	> 400 ≤ 590
			< 75 HB	≤ 240
	N2 N2.1 Cast aluminium alloys N2.2 N2.3	75 – 90 HB	> 240 ≤ 270	
		90 – 140 HB	> 270 ≤ 440	
		–	–	
	N3 N3.1 Free-cutting copper-alloys materials with excellent machining properties N3.2 Short-chip copper-alloys with good to moderate machining properties N3.3 Electrolytic copper and long-chip copper-alloys with moderate to poor machining properties	–	–	
		–	–	
		–	–	
	N4 N4.1 Thermoplastic polymers N4.2 Thermosetting polymers N4.3 Reinforced polymers or composites	–	–	
–		–		
N5 N5.1 Graphite	–	–		
S	S1 S1.1 Titanium or titanium alloys S1.2 S1.3	< 200 HB	≤ 660	
		200 – 280 HB	> 660 ≤ 950	
		280 – 360 HB	> 950 ≤ 1200	
	S2 S2.1 Fe-based high-temperature alloys S2.2	< 200 HB	≤ 690	
		200 – 280 HB	> 690 ≤ 970	
	S3 S3.1 Ni-based high-temperature alloys S3.2	< 280 HB	≤ 940	
		280 – 360 HB	> 940 ≤ 1200	
	S4 S4.1 Co-based high-temperature alloys S4.2	< 240 HB	≤ 800	
240 – 320 HB		> 800 ≤ 1070		
H	H1 H1.1 Chilled cast iron	< 440 HB	–	
	H2 H2.1 Hardened cast iron H2.2	< 55 HRC	–	
		> 55 HRC	–	
	H3 H3.1 Hardened steel < 55 HRC H3.2	< 51 HRC	–	
		51 – 55 HRC	–	
	H4 H4.1 Hardened steel > 55 HRC H4.2	55 – 59 HRC	–	
		> 59 HRC	–	



## HARDNESS CONVERSION TABLE

Strength (MPa)	Hardness			
	BRINELL	VICKERS	ROCKWELL	ROCKWELL
<b>R<sub>m</sub></b>	<b>HB</b>	<b>HV</b>	<b>HRB</b>	<b>HRC</b>
285	86	<b>90</b>	1190	–
320	95	<b>100</b>	56.2	–
350	105	<b>110</b>	62.3	–
385	114	<b>120</b>	66.7	–
415	124	<b>130</b>	71.2	–
450	133	<b>140</b>	75.0	–
480	143	<b>150</b>	78.7	–
510	152	<b>160</b>	81.7	–
545	162	<b>170</b>	85.8	–
575	171	<b>180</b>	87.1	–
610	181	<b>190</b>	89.5	–
640	190	<b>200</b>	91.5	–
675	199	<b>210</b>	93.5	–
705	209	<b>220</b>	95	–
740	219	<b>230</b>	96.7	–
770	228	<b>240</b>	98.1	–
800	238	<b>250</b>	99.5	–
820	242	<b>255</b>	–	23.1
850	252	<b>265</b>	–	24.8
880	261	<b>275</b>	–	26.4
900	266	<b>280</b>	–	27.1
930	276	<b>290</b>	–	28.5
950	280	<b>295</b>	–	29.2
995	295	<b>310</b>	–	31.0
1030	304	<b>320</b>	–	32.2
1060	314	<b>330</b>	–	33.3
1095	323	<b>340</b>	–	34.4
1125	333	<b>350</b>	–	35.5
1155	342	<b>360</b>	–	36.6

Strength (MPa)	Hardness			
	BRINELL	VICKERS	ROCKWELL	ROCKWELL
<b>R<sub>m</sub></b>	<b>HB</b>	<b>HV</b>	<b>HRB</b>	<b>HRC</b>
1190	352	<b>370</b>	–	37.7
1220	361	<b>380</b>	–	38.8
1255	371	<b>390</b>	–	39.8
1290	380	<b>400</b>	–	40.8
1320	390	<b>410</b>	–	41.8
1350	399	<b>420</b>	–	42.7
1385	409	<b>430</b>	–	43.6
1420	418	<b>440</b>	–	44.5
1455	428	<b>450</b>	–	45.3
1485	437	<b>460</b>	–	46.1
1520	447	<b>470</b>	–	46.9
1555	456	<b>480</b>	–	47.7
1595	466	<b>490</b>	–	48.4
1630	475	<b>500</b>	–	49.1
1665	485	<b>510</b>	–	49.8
1700	494	<b>520</b>	–	50.5
1740	504	<b>530</b>	–	51.1
1775	513	<b>540</b>	–	51.7
1810	523	<b>550</b>	–	52.3
1845	532	<b>560</b>	–	53.0
1880	542	<b>570</b>	–	53.6
1920	551	<b>580</b>	–	54.1
1955	561	<b>590</b>	–	54.7
1995	570	<b>600</b>	–	55.2
2030	580	<b>610</b>	–	55.7
2070	589	<b>620</b>	–	56.3
2105	599	<b>630</b>	–	56.8
2145	608	<b>640</b>	–	57.3
2180	618	<b>650</b>	–	57.8

# SIMPLY RELIABLE

As a professional you can judge the quality of work by just looking at the chip. Our chip is a clean and uncomplicated shape that in itself tells a story. It is a clear and consistent signal and that's why we use it as a symbol for being **Simply Reliable**.



**DORMER PRAMET**

[www.dormerpramet.com](http://www.dormerpramet.com)



**CONTACTS TO LOCAL  
SALES SUPPORT  
ALWAYS UP TO DATE!**



DP-CAT-SOLIDMILL-2024-EN

FOLLOW US...



ONLINE



SEGMENTS



LIBRARY APP.



CALCULATOR APP.



## Need a product urgently?

**CALL US:** +65 6294 6388

**EMAIL:** [cmltc@singnet.com.sg](mailto:cmltc@singnet.com.sg)

**VISIT US:** 75 Rowell Road, Singapore 208011

**OPENING HOURS:** Monday-Friday, 9.00AM – 5.30PM

## Why choose Chan Man Lee?

- ✓ Ready stock of 25,000 products
- ✓ No MOQ required for majority of our products
- ✓ Product pickup ready in 10 minutes~1 working day
- ✓ Certified/authorised distributor for over 30 brands
- ✓ Only supplies products from well-known, esteemed brands
- ✓ Only genuine, authentic, factory-original products
- ✓ Technical knowledge on product codes (IMPA, sizing, etc.)