


# A002



## HSS Jobber Drill, TiN-Tip Coated

Versatile drill for both hand-held and machine drilling. A specially designed 118° split point which helps to self-center the drill when drilling by hand and provides more accurate sized holes. Suitable for many materials. TiN-Tip coating improves performance and extends tool life.

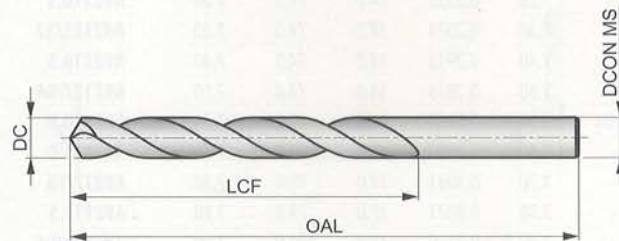

HSS	DIN 338	4xD
118°	TiN-Tip	
λ20-35°	R	DC h8

Workpiece material group suitability, starting values for cutting speed (m/min) and feed Alpha Code. Tables with feed per revolution can be found starting from page 175

<b>P1.1</b> ■ 46 J	<b>P1.2</b> ■ 52 J	<b>P1.3</b> ■ 54 J	<b>P2.1</b> ■ 40 J	<b>P2.2</b> ■ 35 F	<b>P2.3</b> ■ 31 F	<b>P3.1</b> ■ 27 F	<b>P3.2</b> ■ 21 F	<b>P3.3</b> ■ 18 F	<b>P4.1</b> ■ 16 F	<b>P4.2</b> ■ 13 F	<b>P4.3</b> ■ 11 E	<b>M1.1</b> ■ 27 F	<b>M1.2</b> ■ 23 F
<b>M2.1</b> ■ 24 F	<b>M2.2</b> ■ 20 F	<b>M3.1</b> ■ 14 G	<b>M3.2</b> ■ 12 G	<b>M3.3</b> ■ 11 G	<b>M4.1</b> ■ 16 C	<b>K1.1</b> ■ 40 J	<b>K1.2</b> ■ 30 E	<b>K1.3</b> ■ 22 E	<b>K2.1</b> ■ 34 E	<b>K2.2</b> ■ 28 E	<b>K2.3</b> ■ 22 E	<b>K3.1</b> ■ 30 E	<b>K3.2</b> ■ 23 E
<b>K3.3</b> ■ 19 E	<b>K4.1</b> ■ 28 E	<b>K4.2</b> ■ 21 E	<b>K4.3</b> ■ 16 E	<b>K4.4</b> ■ 13 E	<b>K4.5</b> ■ 11 E	<b>K5.1</b> ■ 32 E	<b>K5.2</b> ■ 24 E	<b>K5.3</b> ■ 19 E	<b>N1.1</b> ■ 41 K	<b>N1.2</b> ■ 31 K	<b>N1.3</b> ■ 21 J	<b>N2.1</b> ■ 51 I	<b>N2.2</b> ■ 46 I
<b>N2.3</b> ■ 33 I	<b>N3.1</b> ■ 56 H	<b>N3.2</b> ■ 33 I	<b>N3.3</b> ■ 17 G	<b>N4.1</b> ■ 30 I	<b>N4.2</b> ■ 50 H	<b>N4.3</b> ■ 35 F	<b>S1.1</b> ■ 23 F	<b>S1.2</b> ■ 13 D	<b>S1.3</b> ■ 7 B	<b>S2.1</b> ■ 9 E	<b>S2.2</b> ■ 4 A	<b>S3.1</b> ■ 7 E	<b>S3.2</b> ■ 3 A
<b>S4.1</b> ■ 5 E	<b>S4.2</b> ■ 2 A												

DC < 2mm Bright; DC >= 2mm TiN Tipped and Split Point.  
Products from this series are also available in set. Please see A087, A089 A094, A095 or A099.

Product	DC (inch)	DC (mm)	DC (inch)	LCF (mm)	OAL (mm)	DCON MS (mm)
A0021.0	—	1.00	0.0394	12.0	34.0	1.00
A0021.1	—	1.10	0.0433	14.0	36.0	1.10
A0023/64	3/64	1.19	0.0469	16.0	38.0	1.19
A0021.2	—	1.20	0.0472	16.0	38.0	1.20
A0021.3	—	1.30	0.0512	16.0	38.0	1.30
A0021.4	—	1.40	0.0551	18.0	40.0	1.40
A0021.5	—	1.50	0.0591	18.0	40.0	1.50
A0021/16	1/16	1.59	0.0625	20.0	43.0	1.59
A0021.6	—	1.60	0.0630	20.0	43.0	1.60
A0021.7	—	1.70	0.0669	20.0	43.0	1.70
A0021.8	—	1.80	0.0709	22.0	46.0	1.80
A0021.9	—	1.90	0.0748	22.0	46.0	1.90
A0025/64	5/64	1.98	0.0781	24.0	49.0	1.98
A0022.0	—	2.00	0.0787	24.0	49.0	2.00
A0022.1	—	2.10	0.0827	24.0	49.0	2.10
A0022.2	—	2.20	0.0866	27.0	53.0	2.20
A0022.3	—	2.30	0.0906	27.0	53.0	2.30
A0023/32	3/32	2.38	0.0938	30.0	57.0	2.38
A0022.4	—	2.40	0.0945	30.0	57.0	2.40
A0022.5	—	2.50	0.0984	30.0	57.0	2.50
A0022.6	—	2.60	0.1024	30.0	57.0	2.60
A0022.7	—	2.70	0.1063	33.0	61.0	2.70
A0027/64	7/64	2.78	0.1094	33.0	61.0	2.78
A0022.8	—	2.80	0.1102	33.0	61.0	2.80

Product	DC (inch)	DC (mm)	DC (inch)	LCF (mm)	OAL (mm)	DCON MS (mm)
A0022.9	—	2.90	0.1142	33.0	61.0	2.90
A0023.0	—	3.00	0.1181	33.0	61.0	3.00
A0023.1	—	3.10	0.1220	36.0	65.0	3.10
A0021/8	1/8	3.18	0.1250	36.0	65.0	3.18
A0023.2	—	3.20	0.1260	36.0	65.0	3.20
A0023.25	—	3.25	0.1280	36.0	65.0	3.25
A0023.3	—	3.30	0.1299	36.0	65.0	3.30
A0023.4	—	3.40	0.1339	39.0	70.0	3.40
A0023.5	—	3.50	0.1378	39.0	70.0	3.50
A0029/64	9/64	3.57	0.1406	39.0	70.0	3.57
A0023.6	—	3.60	0.1417	39.0	70.0	3.60
A0023.7	—	3.70	0.1457	39.0	70.0	3.70
A0023.8	—	3.80	0.1496	43.0	75.0	3.80
A0023.9	—	3.90	0.1535	43.0	75.0	3.90
A0025/32	5/32	3.97	0.1563	43.0	75.0	3.97
A0024.0	—	4.00	0.1575	43.0	75.0	4.00
A0024.1	—	4.10	0.1614	43.0	75.0	4.10
A0024.2	—	4.20	0.1654	43.0	75.0	4.20
A0024.3	—	4.30	0.1693	47.0	80.0	4.30
A00211/64	11/64	4.37	0.1719	47.0	80.0	4.37
A0024.4	—	4.40	0.1732	47.0	80.0	4.40
A0024.5	—	4.50	0.1772	47.0	80.0	4.50
A0024.6	—	4.60	0.1811	47.0	80.0	4.60
A0024.7	—	4.70	0.1850	47.0	80.0	4.70

Product	DC	DC	DC	LCF	OAL	D CON MS
	(inch)	(mm)	(inch)	(mm)	(mm)	(mm)
A0023/16	3/16	4.76	0.1875	52.0	86.0	4.76
A0024.8	—	4.80	0.1890	52.0	86.0	4.80
A0024.9	—	4.90	0.1929	52.0	86.0	4.90
A0025.0	—	5.00	0.1969	52.0	86.0	5.00
A0025.1	—	5.10	0.2008	52.0	86.0	5.10
A00213/64	13/64	5.16	0.2031	52.0	86.0	5.16
A0025.2	—	5.20	0.2047	52.0	86.0	5.20
A0025.3	—	5.30	0.2087	52.0	86.0	5.30
A0025.4	—	5.40	0.2126	57.0	93.0	5.40
A0025.5	—	5.50	0.2165	57.0	93.0	5.50
A0027/32	7/32	5.56	0.2188	57.0	93.0	5.56
A0025.6	—	5.60	0.2205	57.0	93.0	5.60
A0025.7	—	5.70	0.2244	57.0	93.0	5.70
A0025.8	—	5.80	0.2283	57.0	93.0	5.80
A0025.9	—	5.90	0.2323	57.0	93.0	5.90
A00215/64	15/64	5.95	0.2344	57.0	93.0	5.95
A0026.0	—	6.00	0.2362	57.0	93.0	6.00
A0026.1	—	6.10	0.2402	63.0	101.0	6.10
A0026.2	—	6.20	0.2441	63.0	101.0	6.20
A0026.3	—	6.30	0.2480	63.0	101.0	6.30
A0021/4	1/4	6.35	0.2500	63.0	101.0	6.35
A0026.4	—	6.40	0.2520	63.0	101.0	6.40
A0026.5	—	6.50	0.2559	63.0	101.0	6.50
A0026.6	—	6.60	0.2598	63.0	101.0	6.60
A0026.7	—	6.70	0.2638	63.0	101.0	6.70
A00217/64	17/64	6.75	0.2656	69.0	109.0	6.75
A0026.8	—	6.80	0.2677	69.0	109.0	6.80
A0026.9	—	6.90	0.2717	69.0	109.0	6.90
A0027.0	—	7.00	0.2756	69.0	109.0	7.00
A0027.1	—	7.10	0.2795	69.0	109.0	7.10
A0029/32	9/32	7.14	0.2813	69.0	109.0	7.14
A0027.2	—	7.20	0.2835	69.0	109.0	7.20
A0027.3	—	7.30	0.2874	69.0	109.0	7.30
A0027.4	—	7.40	0.2913	69.0	109.0	7.40
A0027.5	—	7.50	0.2953	69.0	109.0	7.50
A00219/64	19/64	7.54	0.2969	75.0	117.0	7.54
A0027.6	—	7.60	0.2992	75.0	117.0	7.60
A0027.7	—	7.70	0.3031	75.0	117.0	7.70
A0027.8	—	7.80	0.3071	75.0	117.0	7.80
A0027.9	—	7.90	0.3110	75.0	117.0	7.90
A0025/16	5/16	7.94	0.3125	75.0	117.0	7.94
A0028.0	—	8.00	0.3150	75.0	117.0	8.00
A0028.1	—	8.10	0.3189	75.0	117.0	8.10
A0028.2	—	8.20	0.3228	75.0	117.0	8.20
A0028.3	—	8.30	0.3268	75.0	117.0	8.30
A00221/64	21/64	8.33	0.3281	75.0	117.0	8.33
A0028.4	—	8.40	0.3307	75.0	117.0	8.40
A0028.5	—	8.50	0.3346	75.0	117.0	8.50
A0028.6	—	8.60	0.3386	81.0	125.0	8.60
A0028.7	—	8.70	0.3425	81.0	125.0	8.70
A00211/32	11/32	8.73	0.3438	81.0	125.0	8.73
A0028.8	—	8.80	0.3465	81.0	125.0	8.80
A0028.9	—	8.90	0.3504	81.0	125.0	8.90
A0029.0	—	9.00	0.3543	81.0	125.0	9.00
A0029.1	—	9.10	0.3583	81.0	125.0	9.10
A00223/64	23/64	9.13	0.3594	81.0	125.0	9.13
A0029.2	—	9.20	0.3622	81.0	125.0	9.20
A0029.3	—	9.30	0.3661	81.0	125.0	9.30
A0029.4	—	9.40	0.3701	81.0	125.0	9.40
A0029.5	—	9.50	0.3740	81.0	125.0	9.50
A0023/8	3/8	9.52	0.3750	87.0	133.0	9.52
A0029.6	—	9.60	0.3780	87.0	133.0	9.60
A0029.7	—	9.70	0.3819	87.0	133.0	9.70
A0029.8	—	9.80	0.3858	87.0	133.0	9.80
A0029.9	—	9.90	0.3898	87.0	133.0	9.90
A00225/64	25/64	9.92	0.3906	87.0	133.0	9.92
A00210.0	—	10.00	0.3937	87.0	133.0	10.00

Product	DC	DC	DC	LCF	OAL	D CON MS
	(inch)	(mm)	(inch)	(mm)	(mm)	(mm)
A00210.1	—	10.10	0.3976	87.0	133.0	10.10
A00210.2	—	10.20	0.4016	87.0	133.0	10.20
A00210.3	—	10.30	0.4055	87.0	133.0	10.30
A00213/32	13/32	10.32	0.4063	87.0	133.0	10.32
A00210.4	—	10.40	0.4094	87.0	133.0	10.40
A00210.5	—	10.50	0.4134	87.0	133.0	10.50
A00210.6	—	10.60	0.4173	87.0	133.0	10.60
A00210.7	—	10.70	0.4213	94.0	142.0	10.70
A00227/64	27/64	10.72	0.4219	94.0	142.0	10.72
A00210.8	—	10.80	0.4252	94.0	142.0	10.80
A00210.9	—	10.90	0.4291	94.0	142.0	10.90
A00211.0	—	11.00	0.4331	94.0	142.0	11.00
A00211.1	—	11.10	0.4370	94.0	142.0	11.10
A0027/16	7/16	11.11	0.4375	94.0	142.0	11.11
A00211.2	—	11.20	0.4409	94.0	142.0	11.20
A00211.3	—	11.30	0.4449	94.0	142.0	11.30
A00211.4	—	11.40	0.4488	94.0	142.0	11.40
A00211.5	—	11.50	0.4528	94.0	142.0	11.50
A00229/64	29/64	11.51	0.4531	94.0	142.0	11.51
A00211.6	—	11.60	0.4567	94.0	142.0	11.60
A00211.7	—	11.70	0.4606	94.0	142.0	11.70
A00211.8	—	11.80	0.4646	94.0	142.0	11.80
A00211.9	—	11.90	0.4685	101.0	151.0	11.90
A00215/32	15/32	11.91	0.4688	101.0	151.0	11.91
A00212.0	—	12.00	0.4724	101.0	151.0	12.00
A00212.1	—	12.10	0.4764	101.0	151.0	12.10
A00212.2	—	12.20	0.4803	101.0	151.0	12.20
A00212.3	—	12.30	0.4843	101.0	151.0	12.30
A00231/64	31/64	12.30	0.4844	101.0	151.0	12.30
A00212.4	—	12.40	0.4882	101.0	151.0	12.40
A00212.5	—	12.50	0.4921	101.0	151.0	12.50
A00212.6	—	12.60	0.4961	101.0	151.0	12.60
A00212.7	—	12.70	0.5000	101.0	151.0	12.70
A0021/2	1/2	12.70	0.5000	101.0	151.0	12.70
A00212.8	—	12.80	0.5039	101.0	151.0	12.80
A00212.9	—	12.90	0.5079	101.0	151.0	12.90
A00213.0	—	13.00	0.5118	101.0	151.0	13.00
A00233/64	33/64	13.10	0.5156	101.0	151.0	13.10
A00213.1	—	13.10	0.5157	101.0	151.0	13.10
A00213.2	—	13.20	0.5197	101.0	151.0	13.20
A00213.25	—	13.25	0.5217	108.0	160.0	13.25
A00213.3	—	13.30	0.5236	108.0	160.0	13.30
A00213.4	—	13.40	0.5276	108.0	160.0	13.40
A00217/32	17/32	13.49	0.5313	108.0	160.0	13.49
A00213.5	—	13.50	0.5315	108.0	160.0	13.50
A00213.6	—	13.60	0.5354	108.0	160.0	13.60
A00213.7	—	13.70	0.5394	108.0	160.0	13.70
A00213.75	—	13.75	0.5413	108.0	160.0	13.75
A00213.8	—	13.80	0.5433	108.0	160.0	13.80
A00235/64	35/64	13.89	0.5469	108.0	160.0	13.89
A00213.9	—	13.90	0.5472	108.0	160.0	13.90
A00214.0	—	14.00	0.5512	108.0	160.0	14.00
A00214.25	—	14.25	0.5610	114.0	169.0	14.25
A0029/16	9/16	14.29	0.5625	114.0	169.0	14.29
A00214.5	—	14.50	0.5709	114.0	169.0	14.50
A00237/64	37/64	14.68	0.5781	114.0	169.0	14.68
A00214.75	—	14.75	0.5807	114.0	169.0	14.75
A00215.0	—	15.00	0.5906	114.0	169.0	15.00
A00219/32	19/32	15.08	0.5938	120.0	178.0	15.08
A00215.25	—	15.25	0.6004	120.0	178.0	15.25
A00239/64	39/64	15.48	0.6094	120.0	178.0	15.48
A00215.5	—	15.50	0.6102	120.0	178.0	15.50
A00215.75	—	15.75	0.6201	120.0	178.0	15.75
A0025/8	5/8	15.88	0.6250	120.0	178.0	15.88
A00216.0	—	16.00	0.6299	120.0	178.0	16.00