
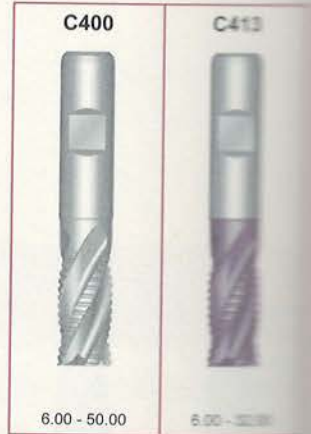


C400	HSS-E		NF	Z 4-6		$\lambda 30^\circ$ $\gamma 12^\circ$	DIN 1835B		k12		DIN 844K
C413	HSS-E		NF	Z 4-6		$\lambda 30^\circ$ $\gamma 12^\circ$	DIN 1835B		TiCN		DIN 844K

- C400**
- Roughing End Mill
 - Fresas semi-desbaste
- C413**
- Fresa de Desbaste
 - Fraises d'ébauche

C400	▪	1.2	1.3	6.2	6.3												
	•	1.1	1.4	2.1	3.1	3.2	3.3	3.4	4.1	4.2	5.1	5.2	6.1	7.2	7.3	8.1	
C413	▪	1.2	1.3	1.4	3.1	3.2	3.3	3.4	4.2	5.2	6.2	6.3					
	•	1.1	1.5	1.6	2.1	2.3	4.1	4.3	5.1	5.3	6.1	6.4	7.2	7.3	7.4	8.1	

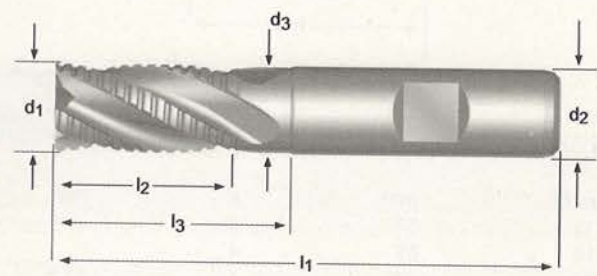

d_1 Ø mm	d_2 Ø _{h6} mm	l_2 mm	l_1 mm	z	l_3 mm	d_3 Ø mm	C400	C413
6.00	6	13	57	4	-	-	C4006.0	C4136.0
7.00	10	16	66	4	-	-	C4007.0	
8.00	10	19	69	4	-	-	C4008.0	C4138.0
9.00	10	19	69	4	-	-	C4009.0	
10.00	10	22	72	4	-	-	C40010.0	C41310.0
11.00	12	22	79	4	-	-	C40011.0	
12.00	12	26	83	4	-	-	C40012.0	C41312.0
13.00	12	26	83	4	37.5	11.5	C40013.0	
14.00	12	26	83	4	37.5	11.5	C40014.0	C41314.0
15.00	12	26	83	4	37.5	11.5	C40015.0	
16.00	16	32	92	4	43.5	15.5	C40016.0	C41316.0
18.00	16	32	92	4	43.5	15.5	C40018.0	C41318.0
20.00	20	38	104	4	53.5	19.5	C40020.0	C41320.0
22.00	20	38	104	4	53.5	19.5	C40022.0	C41322.0
25.00	25	45	121	5	64.5	24.5	C40025.0	C41325.0
26.00	25	45	121	5	64.5	24.5	C40026.0	
28.00	25	45	121	5	64.5	24.5	C40028.0	C41328.0
30.00	25	45	121	5	64.5	24.5	C40030.0	C41330.0
32.00	32	53	133	6	72.5	31.0	C40032.0	C41332.0
40.00	40	63	155	6	84.5	39.0	C40040.0	
50.00	50	75	177	6	96.5	48.0	C40050.0	