

E533





HSS Spiral Flute Machine Tap, BSW, ISO Standard

Machine tap with spiral flute suited for blind holes. Available with bright finish to produce more accurate and cleaner threads, preventing the workpiece material from sticking to the cutting edges or BLUE finish with steam tempered surface, which acts to retain cutting fluid and prevent chip to tool welding.



		Medium
	2xD	HSS
		40°

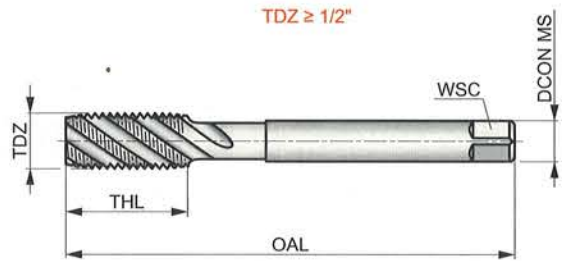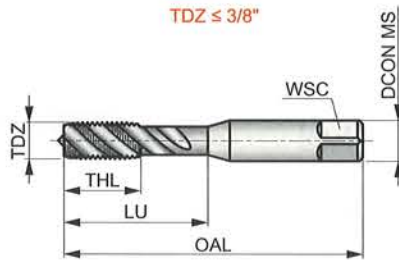

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 10	P1.2 ■ 11	P1.3 ■ 13	P2.1 ■ 8	P2.2 ■ 7	P2.3 ■ 6	P3.1 ■ 7	P3.2 ■ 5	P3.3 ■ 4	P4.1 ■ 4	P4.2 ■ 3	M1.1 ■ 6	M1.2 ■ 5	M2.1 ■ 4
M2.2 ■ 5	M2.3 ■ 5	M3.1 ■ 5	M3.2 ■ 4	M3.3 ■ 3	M4.1 ■ 2	N1.3 ■ 5	N2.1 ■ 12	N2.2 ■ 10	N2.3 ■ 8				

Product	TDZ	TPI	TD	OAL	THL	DCON MS	WSC	NOF	PHD	LU
			(mm)	(mm)	(mm)					
E5331/8 ¹⁾	1/8	40	3.175	48.0	12.5	3.15	2.50	3	2.55	12.50
E5331/8BLUE	1/8	40	3.175	48.0	12.5	3.15	2.50	3	2.55	12.50
E5333/16 ¹⁾	3/16	24	4.763	58.0	11	5.00	4.00	3	3.70	20.00
E5333/16BLUE	3/16	24	4.763	58.0	11	5.00	4.00	3	3.70	20.00
E5331/4 ¹⁾	1/4	20	6.350	66.0	13	6.30	5.00	3	5.10	26.00
E5331/4BLUE	1/4	20	6.350	66.0	13	6.30	5.00	3	5.10	26.00
E5335/16 ¹⁾	5/16	18	7.938	72.0	16	8.00	6.30	3	6.50	31.00
E5335/16BLUE	5/16	18	7.938	72.0	16	8.00	6.30	3	6.50	31.00
E5333/8 ¹⁾	3/8	16	9.525	80.0	18	10.00	8.00	3	7.90	34.00
E5333/8BLUE	3/8	16	9.525	80.0	18	10.00	8.00	3	7.90	34.00
E5331/2 ¹⁾	1/2	12	12.700	89.0	22	9.00	7.10	3	10.50	—
E5331/2BLUE	1/2	12	12.700	89.0	22	9.00	7.10	3	10.50	—
E5335/8 ¹⁾	5/8	11	15.875	102.0	24	12.50	10.00	3	13.50	—
E5335/8BLUE	5/8	11	15.875	102.0	24	12.50	10.00	3	13.50	—
E5333/4 ¹⁾	3/4	10	19.050	112.0	29	14.00	11.20	3	16.50	—
E5333/4BLUE	3/4	10	19.050	112.0	29	14.00	11.20	3	16.50	—

¹⁾ Bright Finish.