

E534





HSS Spiral Point Machine Tap, BSW, ISO Standard

Machine tap with spiral point suited for through holes only. Steam tempered surface acts to retain cutting fluid and prevent chip to tool welding.



	ISO 529	Medium
	2.5xD	HSS
B 3.5-5		
ST		

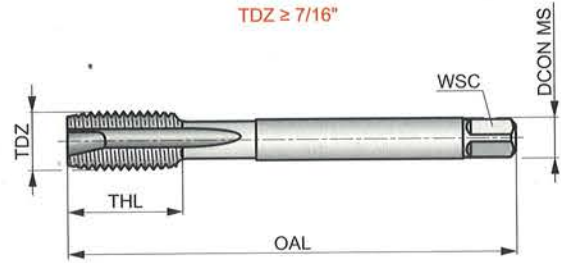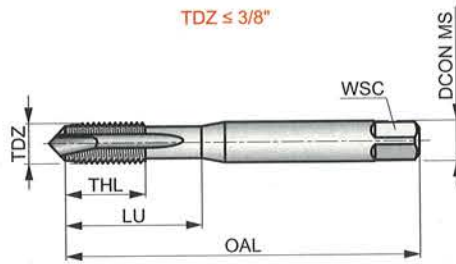

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 11	P1.2 ■ 12	P1.3 ■ 14	P2.1 ■ 9	P2.2 ■ 8	P2.3 ■ 7	P3.1 ■ 8	P3.2 ■ 6	P4.1 ■ 5	P4.2 ■ 4	M1.1 ■ 7	M1.2 ■ 6	M2.1 ■ 6	M2.2 ■ 5
M3.1 ■ 5	M3.2 ■ 4	M3.3 ■ 3	M4.1 ■ 2	K1.1 ■ 9	K1.2 ■ 6	K1.3 ■ 4	K2.1 ■ 12	K2.2 ■ 9	K3.1 ■ 10	K3.2 ■ 6	K4.1 ■ 9	K4.2 ■ 5	K5.1 ■ 11
K5.2 ■ 7													

Product	TDZ	TPI	TD	OAL	THL	DCON MS	WSC	NOF	PHD	LU
E5341/8	1/8	40	3.175	48.0	12.5	3.15	2.50	3	2.55	12.50
E5345/32	5/32	32	3.969	53.0	14	4.00	3.15	3	3.20	14.00
E5343/16	3/16	24	4.763	58.0	11	5.00	4.00	3	3.70	20.00
E5341/4	1/4	20	6.350	66.0	13	6.30	5.00	3	5.10	26.00
E5345/16	5/16	18	7.938	72.0	16	8.00	6.30	3	6.50	29.00
E5343/8	3/8	16	9.525	80.0	18	10.00	8.00	3	7.90	32.00
E5347/16	7/16	14	11.112	85.0	19	8.00	6.30	3	9.20	-
E5341/2	1/2	12	12.700	89.0	22	9.00	7.10	3	10.50	-
E5345/8	5/8	11	15.875	102.0	24	12.50	10.00	3	13.50	-
E5343/4	3/4	10	19.050	112.0	29	14.00	11.20	4	16.50	-