


E712



HSS Straight Flute Hand Tap, NPTF, ANSI Standard

A versatile tool, suitable for machine and also hand tapping. With a straight flute design and bottoming lead for blind and through holes. Bright finish to produce more accurate and cleaner threads, preventing the workpiece material from sticking to the cutting edges.

	ANSI B94.9	Normal
	1.5×D	HSS
C 2-3		
Bright		

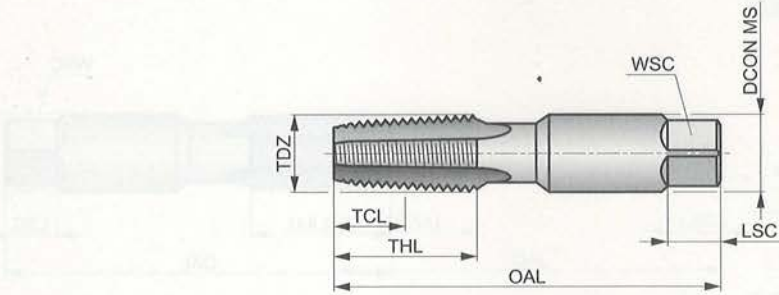

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1	P1.2	P1.3	P2.1	P2.2	P2.3	P3.1	P3.2	P4.1	K1.1	K1.2	K1.3	K2.1	K2.2
■7	■7	■8	■6	■5	■4	■4	■4	■3	■6	■4	■3	■7	■6
K3.1	K3.2	K4.1	K4.2	K5.1	K5.2	N1.3	N2.1	N2.2	N2.3	N3.1	N3.2	N3.3	N4.2
■7	■5	■6	■5	■7	■5	■8	■11	■10	■7	■17	■10	■5	■5
N4.3													
■3													

Product	TDZ	TPI	TD	OAL	THL	TCL	DCON MS	WSC	LSC	NOF	PHD
			(mm)	(mm)	(mm)	(mm)					
E7121/16	1/16	27	7.940	65.0	17	11.70	8.10	6.00	8	4	6.20
E7121/8	1/8	27	10.290	70.0	19	11.90	11.10	8.30	10	4	8.40
E7121/4	1/4	18	13.720	75.0	27	17.60	14.30	10.70	11	4	10.90
E7123/8	3/8	18	17.150	80.0	27	19.50	17.80	13.50	13	4	14.25
E7121/2	1/2	14	21.340	100.0	35	22.70	17.50	13.10	16	4	17.75
E7123/4	3/4	14	26.670	105.0	35	24.40	23.00	17.20	17	5	23.00
E7121	1"	11.5	33.400	115.0	43	29.40	28.60	21.40	21	5	29.00
E7121.1/4	1.1/4	11.5	42.160	125.0	43	27.70	33.40	24.90	23	5	37.75