



# TC burrs for universal applications

## Drive spindle extensions

Burrs (shank dia. 3, 6 and 8 mm) can be extended with drive spindle extensions. They allow access to hard-to-reach areas. The drive spindle extension is mounted in the collet of the tool drive (air-powered or electric), or in the handpiece of the flexible shaft drive. In some applications, spindle extensions are an economical alternative to customized burrs with long shanks.

### Safety notes:

- For safety reasons, it is not possible to use drive spindle extensions in combination with long-shank burrs.
- For additional safety notes, please refer to catalogue section 9.




More detailed information and ordering data for drive spindle extensions can be found in catalogue section 9.



= Read the safety notes!

### Extension SPV 150-3 S6 for shank diameter of 3 mm

EAN 4007220185308

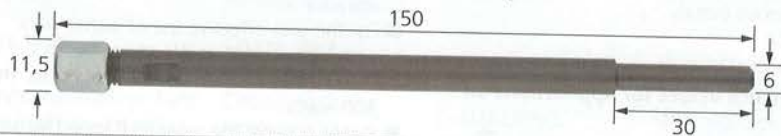


### Extension SPV 150-6 S8 for shank diameter of 6 mm

EAN 4007220185315



### Extension SPV 150-8 S8 for shank diameter of 8 mm

EAN 4007220184400

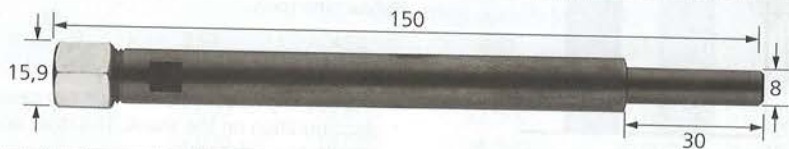

### Extension SPV 100-6 S8 for shank diameter of 6 mm

EAN 4007220185261



### Extension SPV 100-6 SPG 6 for shank diameter of 6 mm

EAN 4007220656051



### Extension SPV 75-6 S8 for shank diameter of 6 mm

EAN 4007220185278



### Extension SPV 75-6 SPG 6 for shank diameter of 6 mm

EAN 4007220333143



### Extension SPV 50-3 S8 for shank diameter of 3 mm

EAN 4007220185254

