

Cut-off wheels

Universal Line PSF ★★☆☆☆



PSF STEELOX ★★☆☆☆

Cut-off wheel for steel and stainless steel (INOX) with high cutting performance and long tool life.

Advantages:

- Universally suitable for steel and stainless steel (INOX).
- Fast work progress thanks to high cutting performance.
- High economic efficiency due to long tool life.
- Thin cut-off wheels are ideal for cordless angle grinders.

Materials that can be worked:

steel, stainless steel (INOX)

Applications:


cutting of sheet metal, profiles and solid material, cutting out holes

Abrasive:

Aluminium oxide A

PFERDVALUE:

Thin cut-off wheels:

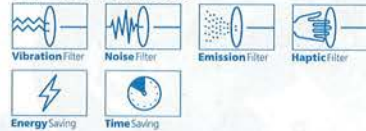

D [mm]	T/U [mm]	EAN 4007220	H [mm]	Max. RPM		Description
Flat type EHT (shape 41) 						
76	0.8	060889	10.0	20,100	25	EHT 76-0,8 PSF STEELOX/10,0
	1.0	060940	10.0	20,100	25	EHT 76-1,0 PSF STEELOX/10,0
105	1.0	098493	16.0	14,500	25	EHT 105-1,0 PSF STEELOX/16,0
	1.0	560266	22.23	13,300	25	EHT 115-1,0 PSF STEELOX
115	1.6	538135	22.23	13,300	25	EHT 115-1,6 PSF STEELOX
	2.4	523025	22.23	13,300	25	EHT 115-2,4 PSF STEELOX
	1.0	560372	22.23	12,200	25	EHT 125-1,0 PSF STEELOX
125	1.6	538142	22.23	12,200	25	EHT 125-1,6 PSF STEELOX
	2.0	667958	22.23	12,200	25	EHT 125-2,0 PSF STEELOX
	2.4	523049	22.23	12,200	25	EHT 125-2,4 PSF STEELOX
150	1.6	581223	22.23	10,200	25	EHT 150-1,6 PSF STEELOX
180	1.6	581230	22.23	8,500	25	EHT 180-1,6 PSF STEELOX
	2.5	523063	22.23	8,500	25	EHT 180-2,5 PSF STEELOX
230	1.9	581216	22.23	6,600	25	EHT 230-1,9 PSF STEELOX
	2.0	702239	22.23	6,600	25	EHT 230-2,0 PSF STEELOX
	2.5	523087	22.23	6,600	25	EHT 230-2,5 PSF STEELOX
Depressed-centre type EH (shape 42) 						
100	2.4	523018	16.0	15,300	25	EH 100-2,4 PSF STEELOX/16,0
115	2.4	523032	22.23	13,300	25	EH 115-2,4 PSF STEELOX
125	2.4	523056	22.23	12,200	25	EH 125-2,4 PSF STEELOX
180	2.5	523070	22.23	8,500	25	EH 180-2,5 PSF STEELOX
230	2.5	523094	22.23	6,600	25	EH 230-2,5 PSF STEELOX

