


TC burrs for universal applications


For fine and coarse stock removal

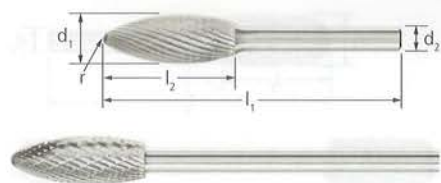

Flame shape B

Flame-shaped burr according to ISO 7755/8 with cut conforming to DIN 8033.

SL = shank length (long steel shank)

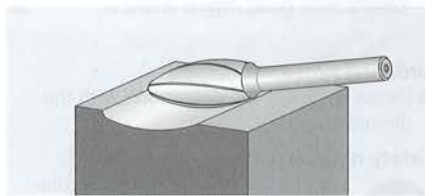




Ordering notes:

■ Please complete the description with the desired cut.

Safety notes:



Please observe the reduced rotational speeds for long-shank burrs. They can be found on page 11.

d ₁ [mm]	l ₂ [mm]	d ₂ [mm]	l ₁ [mm]	r [mm]	Cut			Description	
					3	3 PLUS	5		
					  				
					EAN 4007220				
Shank dia. 3 mm									
3	7	3	37	0.8	-	955482	049570	1	B 0307/3 Z ...
6	13	3	43	1.0	-	955499	049594	1	B 0613/3 Z ...
Shank dia. 6 mm									
8	20	6	60	1.5	046050	046067	-	1	B 0820/6 Z ...
10	25	6	65	1.7	-	955505	-	1	B 1025/6 Z ...
12	30	6	70	2.1	046098	046111	-	1	B 1230/6 Z ...
16	35	6	75	2.6	-	046142	-	1	B 1635/6 Z ...
Long shank dia. of 6 mm, SL 150 mm									
8	20	6	170	1.5	-	617755	-	1	B 0820/6 Z ... SL 150
10	25	6	175	1.7	-	090480	-	1	B 1025/6 Z ... SL 150
12	30	6	180	2.1	-	617779	-	1	B 1230/6 Z ... SL 150

