


Air grinders

Straight grinders



PG 3/250 S

25,000 RPM / 225 watts

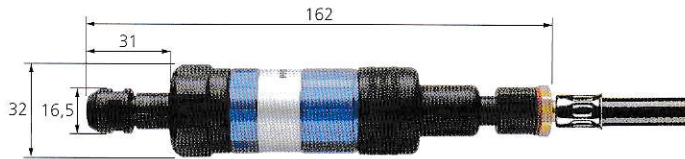

Special features:

- Small design.
- Light, easy to handle.
- Constant power delivery due to the centrifugal governor.

Included in delivery:

3 m air supply hose with 1/4" male threaded connection and threaded quick coupling (STG), 6 mm collet, 2 keys.

Description	EAN	Exhaust direction	Throttle type	Air consumption at idling speed [m ³ /min]	Air consumption under load [m ³ /min]	Collet group	Inner dia. of air supply hose [mm]	Net weight [kg]
PG 3/250 S	286340	front	push-pull	0.21	0.49	5	8.5	0.370

Collets



Group

3 mm,
1/8 inch

For shank dia.

6 mm

1/4 inch

EAN 4007220

5

299944

299951

606032

For dimensions see page 116.

Keys



Description

EAN
4007220



EM SW 7/16"

300480

EM SW 9/16"

186831

Connecting set



Description

EAN
4007220

AS 2

351116

See page 67.

In-line fine filter



Description

EAN
4007220

SF 24 STG-IG 1/4

953259

See page 67.

Suitable PFERD tools

Catalogue section 2	Catalogue section 3*	Catalogue section 4*	Catalogue section 5	Catalogue section 6
TC burrs Cut 3, 3 PLUS, 4, 5, STEEL, INOX, NON-FERROUS, CAST, MICRO, ALLROUND Dia. 4 to 6 mm	Mounted points Shank dia. 3 mm: Dia. up to 20 mm Dia. 20 to 25 mm Width ≤ 16 mm	Poliflex fine grinding points Shank dia. 3 + 6 mm Bonds: GR, PUR Dia. up to 10 mm GHR, LR, TX, LHR Dia. up to 20 mm	Diamond grinding points Dia. 5.5 to 12.0 mm CBN grinding points Dia. 10.0 to 15.0 mm	Cut-off wheels EHT Dia. 30 mm matching arbor BO 6/6 0-4
Cut 1, ALU, FVK, FVKS, PLAST, ALLROUND, TITANIUM Dia. 6 to 12 mm	Shank dia. 6 mm: Dia. up to 13 mm	Abrasive spiral bands and rubber drum holders Dia. up to 19 mm	Diamond cut-off wheels Dia. 30 to 50 mm matching arbors BO 6/10 3 BO 8/10 3	Snagging wheels ER Dia. 30 mm matching arbor BO 6/6 3-10
HSS rotary cutters Special cuts Dia. 3.2 mm	Dia. 13 to 25 mm Width ≤ 40 mm Dia. 25 to 32 mm Width ≤ 20 mm	POLICAP Dia. up to 7 mm Shank dia. 3 + 6 mm Mounted flap wheels Dia. up to 20 mm Shank dia. 3 + 6 mm POLINOX unitized wheels PNER Dia. 25 mm		

If no shank diameter is given, the shank dia. of 6 mm applies.

*Catalogue sections 3/4: This data applies to an unsupported shank length of 10 mm and the max. stated mounted point dimensions.

Note: Please observe the recommended cutting speeds and the max. permitted rotational speeds in catalogue sections 2-8.