


D [mm]	W _F [mm]	L _T [mm]	D _F [mm]	H [mm]	Packaging		Opt. RPM	Max. RPM	Description
					10x	1			
					 EAN 4007220				
Silicon carbide (SiC) plastic filament									
50	4	10	0.55	50	-	936511	6,000-9,800	15,000	RBV 5004/6 SiC 120 0,55
50	10	13	0.90	50	-	104750	6,000-9,800	15,000	RBV 5010/6 SiC 180 0,90
	15	13	0.90	50	531945	220610	6,000-9,800	15,000	RBV 5015/6 SiC 180 0,90
70	8	19	0.55	50	-	936528	6,000-9,800	15,000	RBV 7008/6 SiC 120 0,55
	15	19	0.90	50	894644	220627	6,000-9,800	15,000	RBV 7015/6 SiC 180 0,90
80	8	19	0.55	50	-	936535	4,800-7,800	12,000	RBV 8008/6 SiC 120 0,55
	15	19	0.90	50	-	220634	4,800-7,800	12,000	RBV 8015/6 SiC 180 0,90
Ceramic oxide grain (CO) plastic filament									
50	4	10	0.55	50	-	936542	6,000-9,800	15,000	RBV 5004/6 CO 120 0,55
	15	13	1.10	50	-	899342	6,000-9,800	15,000	RBV 5015/6 CO 120 1,10
70	8	19	0.55	50	-	936559	6,000-9,800	15,000	RBV 7008/6 CO 120 0,55
	15	19	1.10	50	-	899359	6,000-9,800	15,000	RBV 7015/6 CO 120 1,10
80	8	19	0.55	50	-	936566	4,800-7,800	12,000	RBV 8008/6 CO 120 0,55
	15	19	1.10	50	-	899366	4,800-7,800	12,000	RBV 8015/6 CO 120 1,10

RBV, encapsulated


Suitable for medium-duty brushing such as deburring, cleaning and derusting.

Advantages:

- Focused working thanks to high dimensional stability.

Recommendations for use:

- For the best results, use a tool drive with a minimum output of 300 watts.

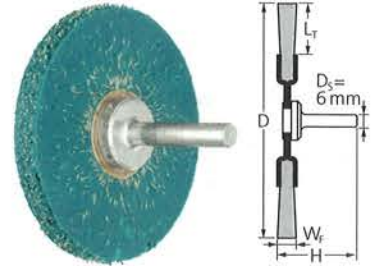

D [mm]	W _F [mm]	L _T [mm]	D _F [mm]	H [mm]	Packaging	Opt. RPM	Max. RPM	Description
					 EAN 4007220			

Steel wire (ST)

ST = brass-plated steel wire

63	7	20	0.30	40	220955	7,500-11,300	15,000	RBV 6307/6 ST 0,30
----	---	----	------	----	--------	--------------	--------	--------------------

