


Shank mounted cup brushes

crimped

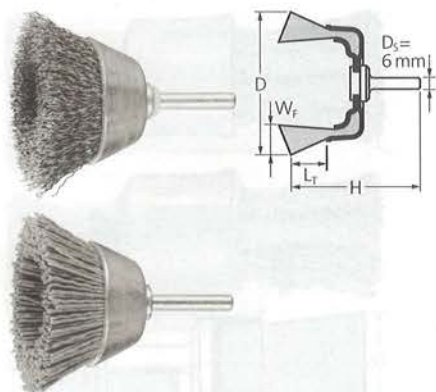

TBU

Universally suitable for cleaning, derusting and smoothing, as well as removal of corrosion and paint. Particularly suitable for brushing on large, flat and easily accessible surfaces due to face-down use with the entire brush face applied to the workpiece.

Advantages:

- Highly flexible, enabling optimal adjustment to the workpiece contour.

Recommendations for use:

- For the best results, use a tool drive with a minimum output of 300 watts.

Ordering notes:

- For POS type, please add "POS" to the description.

D [mm]	W _f [mm]	L _r [mm]	D _f [mm]	H [mm]	Packaging		Opt. RPM	Max. RPM	Description
					5x 1	10			
Steel wire (ST)									
30	10	15	0.20	60	-	004517	5,300-7,900	10,500	TBU 3010/6 ST 0,20
40	15	20	0.20	70	-	004524	5,300-7,900	10,500	TBU 4015/6 ST 0,20
50	10	20	0.30	75	532171	153345	5,300-7,900	10,500	TBU 5010/6 ST 0,30
60	15	20	0.30	85	-	153352	2,200-3,400	4,500	TBU 6015/6 ST 0,30
70	15	22	0.20	80	-	004531	3,000-4,500	6,000	TBU 7015/6 ST 0,20
			0.30	80	-	004555	3,000-4,500	6,000	TBU 7015/6 ST 0,30
Stainless steel wire (INOX)									
Supplied with plastic covered brush body.									
30	10	15	0.20	60	-	004562	4,200-6,800	10,500	TBU 3010/6 INOX 0,20
40	15	20	0.20	70	-	004579	4,200-6,800	10,500	TBU 4015/6 INOX 0,20
50	10	20	0.30	75	894651	579107	4,200-6,800	10,500	TBU 5010/6 INOX 0,30
60	15	20	0.30	85	-	579114	1,800-2,900	4,500	TBU 6015/6 INOX 0,30
70	15	22	0.20	80	-	004586	2,400-4,000	6,000	TBU 7015/6 INOX 0,20
			0.30	80	-	004593	2,400-4,000	6,000	TBU 7015/6 INOX 0,30
Silicon carbide (SiC) plastic filament									
50	10	20	0.90	75	894668	220719	4,200-6,800	10,500	TBU 5010/6 SiC 180 0,90
60	15	20	0.90	85	-	220726	1,800-2,900	4,500	TBU 6015/6 SiC 180 0,90
Ceramic oxide grain (CO) plastic filament									
50	15	22	1.10	75	-	004609	4,200-6,800	10,500	TBU 5015/6 CO 120 1,10

