


Polishing tools

Felt points FK

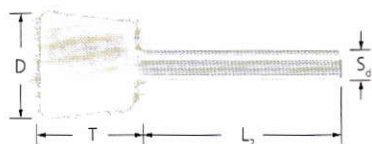


Shape WKN

The tapered shape WKN is mainly used for work on interior angles.


Matching tool drives:
flexible shaft drive, straight grinder

Ordering notes:

■ Please complete the description with the desired type.

D [mm]	T [mm]	S _d [mm]	L ₂ [mm]	Type		Opt. RPM	Max. RPM		Description
				M (medium)	H (hard)				
				EAN 4007220					
Shank dia. 2.35 mm									
10	15	2.35	32	036280	-	10,000–20,000	47,500	10	FK WKN 1015/2,35 ...
12	12	2.35	34	036303	036327	8,000–16,000	39,500	10	FK WKN 1212/2,35 ...
Shank dia. 3 mm									
10	15	3	32	036297	-	10,000–20,000	47,500	10	FK WKN 1015/3 ...
12	12	3	36	036310	036334	8,000–16,000	39,500	10	FK WKN 1212/3 ...
15	15	3	32	036341	036358	6,000–12,000	31,500	10	FK WKN 1515/3 ...
20	16	3	28	036365	-	5,000–10,000	23,500	10	FK WKN 2016/3 ...
Shank dia. 6 mm									
20	16	6	38	294758	-	5,000–10,000	23,500	10	FK WKN 2016/6 ...

Mounted felt flap wheels FLS

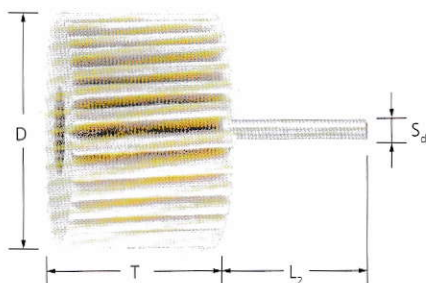

FLS

Mounted felt flap wheels are used for pre-polishing and high-gloss polishing on small to medium-sized components.

Advantages:

■ Low thermal load on the workpiece.

Recommendations for use:

■ Use the hard type for pre-polishing flat surfaces, and the soft type for high-gloss polishing and processing workpieces with lots of contours.


■ If very fine finishes need to be achieved, the two types can be used successively.

Matching tool drives:

flexible shaft drive, straight grinder

Ordering notes:

■ Please complete the description with the desired type.

D [mm]	T [mm]	S _d [mm]	L [mm]	Type		Opt. RPM	Max. RPM		Description
				W (soft)	H (hard)				
				EAN 4007220					
30	20	6	40	936160	936177	6,300	20,000	5	FLS 3020/6 ...
40	20	6	40	936184	936191	4,750	15,000	5	FLS 4020/6 ...
50	30	6	40	936207	936214	3,800	12,000	5	FLS 5030/6 ...
60	40	6	40	936221	936238	3,150	10,000	5	FLS 6040/6 ...
80	50	6	40	936245	936252	2,400	7,500	5	FLS 8050/6 ...

