SCREW EXTRACTORS/HOLESAWS

www.armeg.co.uk

SCREW EXTRACTORS

- For extracting broken screws or studs by inserting the Extractor into a pre-drilled hole and turning anti-clockwise.



PART NO	NO.	DRILL DIAMETER TO BE USED mm		SCREW SIZE TO BE EXTRACTED (mm)
		Low tensile screws	High tensile screws	
NO.1 SCREW	1	2.0	2.0	3-5
NO.2 SCREW	2	2.8	3.0	6
NO.3 SCREW	3	4.0	4.3	8-10
NO.4 SCREW	4	5.5	6.0	12
NO.5 SCREW	5	7.2	8.0	14
NO.6 SCREW	6	10.5	11.0	16-20
NO.7 SCREW	7	13.5	14.5	22-30
NO.8 SCREW	8	20.5	21.5	33-42
NO.9 SCREW	9	27.0	28.0	45




SETS

PART NO	NO. OF TOOLS	CONTENTS
SET A	5	1-5
SET B	6	1-6
SET E	3	7-9

HOLESAWS

- Bi-metal holesaws feature bonded construction.
- Provides greater efficiency and uninterrupted cutting of a wide range of machinable materials.
- Including wood, plastics, cast iron, stainless steel, brass, bronze and aluminium.
- Ideal for production and maintenance applications in the electrical and building trades.
- Specifically for producing installation holes through floors and partitions.

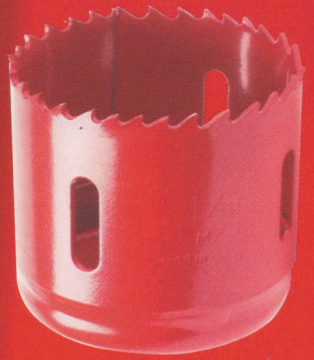



HOLESAWS

PART NO	DIAMETER mm
CH014	14.0
CH016	16.0
CH019	19.0
CH020	20.0
CH022	22.0
CH025	25.0
CH029	29.0
CH032	32.0
CH035	35.0
CH038	38.0
CH040	40.0
CH041	41.0
CH044	44.0
CH045	45.0
CH046	46.0
CH050	50.0
CH051	51.0
CH052	52.0
CH054	54.0
CH057	57.0
CH060	60.0
CH064	64.0

HOLESAWS

PART NO	DIAMETER mm
CH065	65.0
CH067	67.0
CH070	70.0
CH073	73.0
CH076	76.0
CH079	79.0
CH083	83.0
CH086	86.0
CH089	89.0
CH092	92.0
CH095	95.0
CH098	98.0
CH100	100.0
CH102	102.0
CH105	105.0
CH108	108.0
CH111	111.0
CH114	114.0
CH121	121.0
CH127	127.0
CH146	146.0
CH152	152.0

ACCESSORIES AND SETS

PART NO	DESCRIPTION
PILOT DRILLS	
CHPD	Pilot Drill
ARBORS	
CHD16-29HEX	9.5mm Hex Shank 16mm to 29mm
CHD16-29SDS	9.5mm SDS Shank 16mm to 29mm
CHD32-152HEX	13.0mm Hex Shank 32mm to 152mm
CHD32-152SDS	13.0mm SDS Shank 32mm to 152mm
SETS	
CH6SETELHEX	**Electricians Hex Kit** 16.0, 20.0, 25.0, 32.0, 40.0, 51.0 16mm to29mm Hex Shank 32mm to 64mm Hex Shank
CH6SETPLHEX	**Plumbers Hex Kit** 19.0, 22.0, 29.0, 38.0, 44.0, 57.0 16mm to 29mm Hex Shank 32mm to 64mm Hex Shank