

PBG

Aggressive brush. Suitable for medium-duty brushing such as deburring, cleaning and derusting.

Advantages:


- Optimal access to hard-to-reach areas such as recesses and drilled holes.

Recommendations for use:

- Use speed-adjustable tool drives to control the spread of the brush.
- For the best results, use a tool drive with a minimum output of 500 watts.

Ordering notes:

- For POS type, please add "POS" to the description.

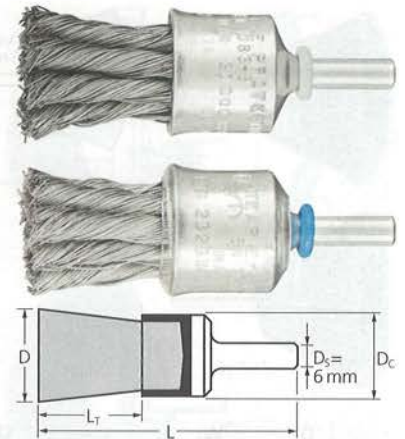

D [mm]	D _c [mm]	L _r [mm]	D _s [mm]	L [mm]	Knots [pcs.]	Packaging		Opt. RPM	Max. RPM	Description
						10x 				
						EAN 4007220				
Steel wire (ST)										
19	19	28	0.25	68	6	-	936580	10,000-15,000	20,000	PBG 1919/6 ST 0,25
			0.35	68	6	532416	153314	10,000-15,000	20,000	PBG 1919/6 ST 0,35
			0.50	68	6	894361	531051	10,000-15,000	20,000	PBG 1919/6 ST 0,50
23	23	28	0.25	68	8	-	936603	10,000-15,000	20,000	PBG 2323/6 ST 0,25
			0.35	68	8	-	936610	10,000-15,000	20,000	PBG 2323/6 ST 0,35
			0.50	68	8	-	936627	10,000-15,000	20,000	PBG 2323/6 ST 0,50
30	28	25	0.25	68	12	-	936672	8,000-11,300	20,000	PBG 3028/6 ST 0,25
			0.35	68	12	532423	531068	8,000-11,300	20,000	PBG 3028/6 ST 0,35
			0.50	68	12	894422	531075	8,000-11,300	20,000	PBG 3028/6 ST 0,50

Stainless steel wire (INOX)

Supplied with plastic-covered brush body. All INOX brushes are degreased.

19	19	28	0.15	68	6	-	598078	8,000-13,000	20,000	PBG 1919/6 INOX 0,15
			0.25	68	6	-	936597	8,000-13,000	20,000	PBG 1919/6 INOX 0,25
			0.35	68	6	532430	220702	8,000-13,000	20,000	PBG 1919/6 INOX 0,35
			0.60	68	6	-	531082	8,000-13,000	20,000	PBG 1919/6 INOX 0,60
23	23	28	0.15	68	8	-	936634	8,000-13,000	20,000	PBG 2323/6 INOX 0,15
			0.25	68	8	-	936641	8,000-13,000	20,000	PBG 2323/6 INOX 0,25
			0.35	68	8	-	936658	8,000-13,000	20,000	PBG 2323/6 INOX 0,35
			0.60	68	8	-	936665	8,000-13,000	20,000	PBG 2323/6 INOX 0,60
30	28	25	0.15	68	12	-	598085	6,000-9,800	20,000	PBG 3028/6 INOX 0,15
			0.25	68	12	-	936689	6,000-9,800	20,000	PBG 3028/6 INOX 0,25
			0.35	68	12	532447	531099	6,000-9,800	20,000	PBG 3028/6 INOX 0,35
			0.60	68	12	-	531105	6,000-9,800	20,000	PBG 3028/6 INOX 0,60

